NORLYS

2018-2019



NORLYS



NORLYS is a Scandinavian company with a 50 years history in the professional lighting business. We offer one of the largest product ranges in decorative outdoor lighting and we deliver highest quality all over the world.

No secret: our quality comes from the choice of excellent raw-material in combination with a perfectly controlled production process. All our products are made in Europe in our own ISO 9001 certified factory. On a surface of more than 15000m2 we use most modern machines and equipment. Steady investment keeps us on the top of the industrial process. A good example is our foundry, one of the most modern installations in Europe.

When we cannot do it alone, we carefully choose our partners. This is especially important in the field of LED technology. We use the best LED quality from the very best suppliers. No compromise allowed!

Good design, large choice, excellent quality: indeed that's what our customers appreciate! In this world of quick exchange it is equally important to work on high delivery-speed. This is why we have several very large warehouses with thousands of finished products ready to be shipped.
If something is not already in stock, we produce within days.















ISO 9001 DNV REGISTERED

RoHS 2011/65/EU

CE

No pictures contained in this catalogue can be reproduced, even partially. The Company reserves the right to change technical and aesthetical characteristics of illustrated products at any times, in order to increase constantly their quality and performance without written notice.

LIGHT SOURCE / SOCKET

LIGHT SOURCE	SOCKET
	E27
	G12 
	GU10 

Look for LED products: See the green house 

NORLYS offers a large variety of lamp options. Please refer to the concerned product page for details. The large majority of our products is delivered without lamp.

Many fixtures are equiped with E27 lampholder. Please see below for equivalents between GLS and halogen lamps to be used. For example if a 60W incandescent lamp is recommended, you can use holgen lamps up to 46W. Alternatively you might use fluo compact lamps with integrated ballast or LED retrofit lamps for E27 lampholder. Do not hesitate to contact us for advise.

LED		HALOGEN		GLS
4W	<=>	30W	<=>	40W
8-9W	<=>	46W	<=>	60W
12-13W	<=>	57W	<=>	75W
14-15W	<=>	77W	<=>	100W

In some exceptionnal cases our products are delivered with LED bulbs. Originally this has been done to make sure that the right lamp is beeing used in the concerned fixture. In other cases it simply makes installation easier (see RENA inground fixtures).

Finally, you will as well find a large number of products with LED module. LED modules allow better cooling and optimized control of the light output. Certain fixtures use more than one module and in the case of VISBY for example, each module can be driven separatly. As a result you have a fixture allowing many different applications (twilight detector, movement detector, different light output in function to your needs). LED modules are a good solution to save energy and to decrease maintenance cost over the time.

Design and technical details:
The characteristics of the models mentioned in this catalogue are not binding. Norlys reserves itself the right to change them without notice and without
obligation of communication in according to its own technical constructive

Color temperatures (Kelvin)



INDEX


ALTA
p. 68, 69



ARVIKA
p. 21



ASKER FAMILY
p. 36 - 39


BASEL
p. 52, 53


BERGEN FAMILY
p. 90, 91


BERLIN
p. 80, 81


BERN
p. 50, 51


BODEN
p. 54, 55


BOLOGNA FAMILY
p. 116, 117


BORNHOLM
p. 48


BREMEN
p. 78, 79


CHELSEA FAMILY
p. 92 - 95


COMO FAMILY
p. 118


EGERSUND FAMILY
p. 18, 19


FIRENZE
p. 119


GENEVE
p. 40


GENOVA
p. 96, 97


GENOVA MINI
p. 96


GLASGOW
p. 98, 99


GRIMSTAD
p. 32, 33


HALDEN
p. 46, 47


HALMSTAD FAMILY
p. 66, 67


HELSINKI FAMILY
p. 28, 29



HITRA
p. 41


KARLSTAD
p. 88, 89


KIRUNA
p. 28


KOSTER FAMILY
p. 12 - 15



LARVIK
p. 85


LATINA
p. 99


LILLEHAMMER
p. 26, 27

INDEX



LILLESAND
p. 58, 59



LOFOTEN FAMILY
p. 100 - 103


LONDON FAMILY
p. 104 - 109


LUND FAMILY
p. 82, 83



MANDAL
p. 41


MODENA FAMILY
p. 110 - 115


MOLDE
p. 62, 63



NAMSOS FAMILY
p. 30, 31


NARVIK
p. 20


NICE
p. 8


NORDKAPP
p. 80


NORDLAND
p. 56, 57


OPPLAND
p. 60, 61


OSLO FAMILY
p. 84, 85


PARIS
p. 86, 87



RENA FAMILY
p. 34, 35


RIMINI/MILANO FAMILY
p. 120, 121


ROMA
p. 99


RONDANE
p. 48, 49


SANDE FAMILY
p. 22, 23


SANDVIK FAMILY
p. 42, 43


SCANDINAVIAN WOOD
p. 64, 65



SKI
21


STAVANGER
p. 16, 17


STOCKHOLM FAMILY
p. 70 - 77


SUNNFJORD
p. 9


VANSBRO
p. 91


VASA
p. 44, 45


VENEDIG
p. 96


VISBY
p. 10, 11

INDEX



VOSS
p. 24, 25



TELESCOPIC POLES
p. 11



ACCESSORIES
p. 122, 123

COLOUR

COLOUR CHART
Important: Each product number in the catalogue is specified with a standard colour.
- Other colours by request.
- Patina colour by request (only with black colour as standard).
- Printed colour images may differ from the real product.



ALUMINIUM, RAL 9006



GRAPHITE, RAL 7016



WHITE, RAL 9003



GALVANIZED STEEL



COPPER



BLACK, RAL 9005



STAINLESS STEEL





NICE

LED









NICE
IP65, class I
Ideally suited for use in communal areas such as carparks and walkways.
Powder coated aluminium head.

For use on poles with 60mm external diameter at top.

Art. 777
40,3W LED
Aluminium, 777AL
Graphite, 777GR
LED module: 5127 lm, 3000K, 50 000h, EEI: A++

**** Nice with 4000K and Dali available by request, contact your supplier.***

Accessories
Art. 154
Aluminium, 154AL
Graphite, 154GR

Arm for use on wall with NICE, ø60mm.

See also poles for use with NICE on p. 11





SUNNFJORD

LED









SUNNFJORD
IP55, class I
Ideally suited for use in communal areas such as car parks and walkways, Sunnfjord is a powder coated aluminium head.

For use on poles with 76mm external diameter at top.

Supplied with frosted lens

See also poles for use with Sunnfjord on p. 11

Art. 1507
46,7W LED
Aluminium, 1507AL
Graphite, 1507GR
LED module: 6000 lm, 4000K, 60 000h, EEI: A++

Art. 1508
31,5W LED
Aluminium, 1508AL
Graphite, 1508GR
LED module: 4342 lm, 4000K, 60 000h, EEI: A++

Accessories
Art. 1509
Adapter for 76/60mm
Aluminium, 1509AL
Graphite, 1509GR

Suitable to use with with poles ø 60mm


VISBY






Version LED


G12 LED











VISBY
IP65, class I
Ideally suited for use in communal areas such as car parks and walkways, Visby is a powder coated aluminium head fitted with a UV resistant polycarbonate lens.

For use on poles with 60mm external diameter at top.

Art. 575
70W HIT-CE, G12
Aluminium, 575AL
Graphite, 575GR
EEI: A+

Art. 576
49,2W LED
Aluminium, 576AL
Graphite, 576GR

LED module (up)
30,4W, 3000 lm, 3000K
50 000h, EEI: A

LED module (down)
18,8W, 2000 lm, 3000K
50 000h, EEI: A+

**** Visby with 4000K and Dali available by request, contact your supplier.***

Art. 577
30,4W LED
Aluminium, 577AL
Graphite, 577GR


LED module (up)
30,4W, 3000 lm, 3000K
50 000h, EEI: A

Accessories
Art. 154
Aluminium, 154AL
Graphite, 154GR

Arm for use on wall with Visby, ø60mm.

See also poles for use with Visby on p. 11






POLE
For use with products VISBY, SUNNFJORD, NICE and KOSTER.
Ideally suited for use in communal areas such as car parks and walkways.

The pole is telescopic and can be adjusted from: Minimum 3625mm to maximum 4490mm.
Top tube ø 76mm.

Available in Graphite and Aluminium




Art. 3004
Included service door

Art. 3005
Included service door + anchors


Art. 3006
Included service door + anchors + art 7661

Art. 3007
Included service door + anchors + Art 7662, EK 480




Accessories
Art. 7660
Adapter for 76/60mm (short version)

* Must be used with **VISBY and KOSTER Art. 1913** head ø 60mm




Accessories
Art. 7665
Adapter for 76/60mm (long version)

* Must be used with **NICE** head ø 60mm



Accessories
Art. 7661
Electric box for pole 3006



Art. 7662
Electric box for pole 3007 (EK 480 G1S-2D)

KOSTER

LED




ART. 1913



ART. 1914

KOSTER FAMILY ⟶





KOSTER LAMP HEAD
IP54, Class I
Ideally suited for use in communal areas such as car parks and walkways, Koster is a powder coated aluminium head supplied with optical structure polycarbonate lens.

Art. 1913: **For use on poles with 60mm external diameter at top.**
See also poles for use with Koster on p. 11

Art. 1913
18,8W LED
Aluminium, 1913AL
Graphite, 1913GR
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

**** Koster with 4000K available by request, contact your supplier.***

KOSTER TELESCOPIC POLE
IP54, class I
Ideally suited for use in communal areas such as car parks and walkways, Powder coated aluminium. Optical structure polycarbonate lens.
Pole and head included.

Accessories for 1914
Art. 405
Concreting anchor
Art. 406
Anchoring support

Art. 1914
18,8W LED
Aluminium, 1914AL
Graphite, 1914GR
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

**** Koster with 4000K available by request, contact your supplier.***







KOSTER



E27 LED







KOSTER
IP54
Powder coated aluminium wall light supplied with optical structure polycarbonate lens.

Accessories
Art. 158
Corner bracket for Koster wall models.
Aluminium, 158AL
Graphite, 158GR

Art. 720
E27, 77W Halo. max
class II
Aluminium, 720AL
Graphite, 720GR
EEI: A+..D

Art. 1911
18,8W LED
class I
Aluminium, 1911AL
Graphite, 1911GR
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

Art. 724
E27, 77W Halo. max
class I
Aluminium, 724AL
Graphite, 724GR
EEI: A+..D

Art. 725
11,3W LED
class I
Aluminium, 725AL
Graphite, 725GR
LED module: 1100 lumen, 3000K, 50000h, EEI: A+


Art. 1912
18,8W LED
class I
Aluminium, 1912AL
Graphite, 1912GR
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

**** Koster with 4000K available by request, contact your supplier.***



STAVANGER

LED










Frosted lens

STAVANGER
IP65, class I
Powder coated aluminium bollard. Lens: UV stabilised, vandal resistant. Indirect LED light output.


Art. 1240, 1244 and 1247 is delivered with clear polycarbonate lens. IK10

Art. 1243, 1246 and 1248 is delivered with frosted PMMA lens.


Accessories for Stavanger bollards
Art. 1230
Concreting anchor for Stavanger range.
Art. 1231
Anchoring support for Stavanger range.



Art. 1240
17,5W LED
Clear lens
Aluminium, 1240AL
Graphite, 1240GR
LED module: 1380 lumen, 3000K, 50000h, EEI: A+



Art. 1244
17,5W LED
Clear lens
Aluminium, 1244AL
Graphite, 1244GR
LED module: 1380 lumen, 3000K, 50000h, EEI: A+



Art. 1247
9,2W LED
Clear lens
Aluminium, 1247AL
Graphite, 1247GR
LED module: 750 lumen, 3000K, 50000h, EEI: A+

**** Stavanger with 4000K and Dali available by request, contact your supplier.***

Art. 1243
E27, 46W Halo. max.
Frosted lens
Aluminium, 1243AL
Graphite, 1243GR
EEI: A+..D

Art. 1246
E27, 46W Halo. max.
Frosted lens
Aluminium, 1246AL
Graphite, 1246GR
EEI: A+..D

Art. 1248
E27, 46W Halo. max.
Frosted lens
Aluminium, 1248AL
Graphite, 1248GR
EEI: A+..D



EGERSUND MINI


LED




EGERSUND

LED







EGERSUND
IP65, class I
Powder coated aluminium bollard. Clear PMMA lens.

Indirect LED light output.


Egersund
Art. 1280
20,3W LED
Aluminium, 1280AL
Graphite, 1280GR
LED module: 2240 lm, 3000K, 50000h, EEI: A+


Egersund
Art. 1285
20,3W LED
Aluminium, 1285AL
Graphite, 1285GR
LED module: 2240 lm, 3000K, 50000h, EEI: A+

Egersund with 4000K and Dali available by request, contact your supplier.

Accessories for Art. 1280, 1285
Art. 1230
Concreting anchor

Art. 1231
Anchoring support





EGERSUND MINI
IP65, class I
Powder coated aluminium bollard. Clear PMMA lens
Indirect LED light output.


Egersund Mini
Art. 1290
13,2W LED
Aluminium, 1290AL
Graphite, 1290GR
LED module: 1360 lm, 3000K, 50000h, EEI: A+, dimmable (Triac)

Egersund Mini
Art. 1291
13,2W LED
Aluminium, 1291AL
Graphite, 1291GR
LED module: 1360 lm, 3000K, 50000h, EEI: A+, dimmable (Triac)

Accessories for Art. 1290, 1291

Art. 205
Concreting anchor

Art. 206
Anchoring support

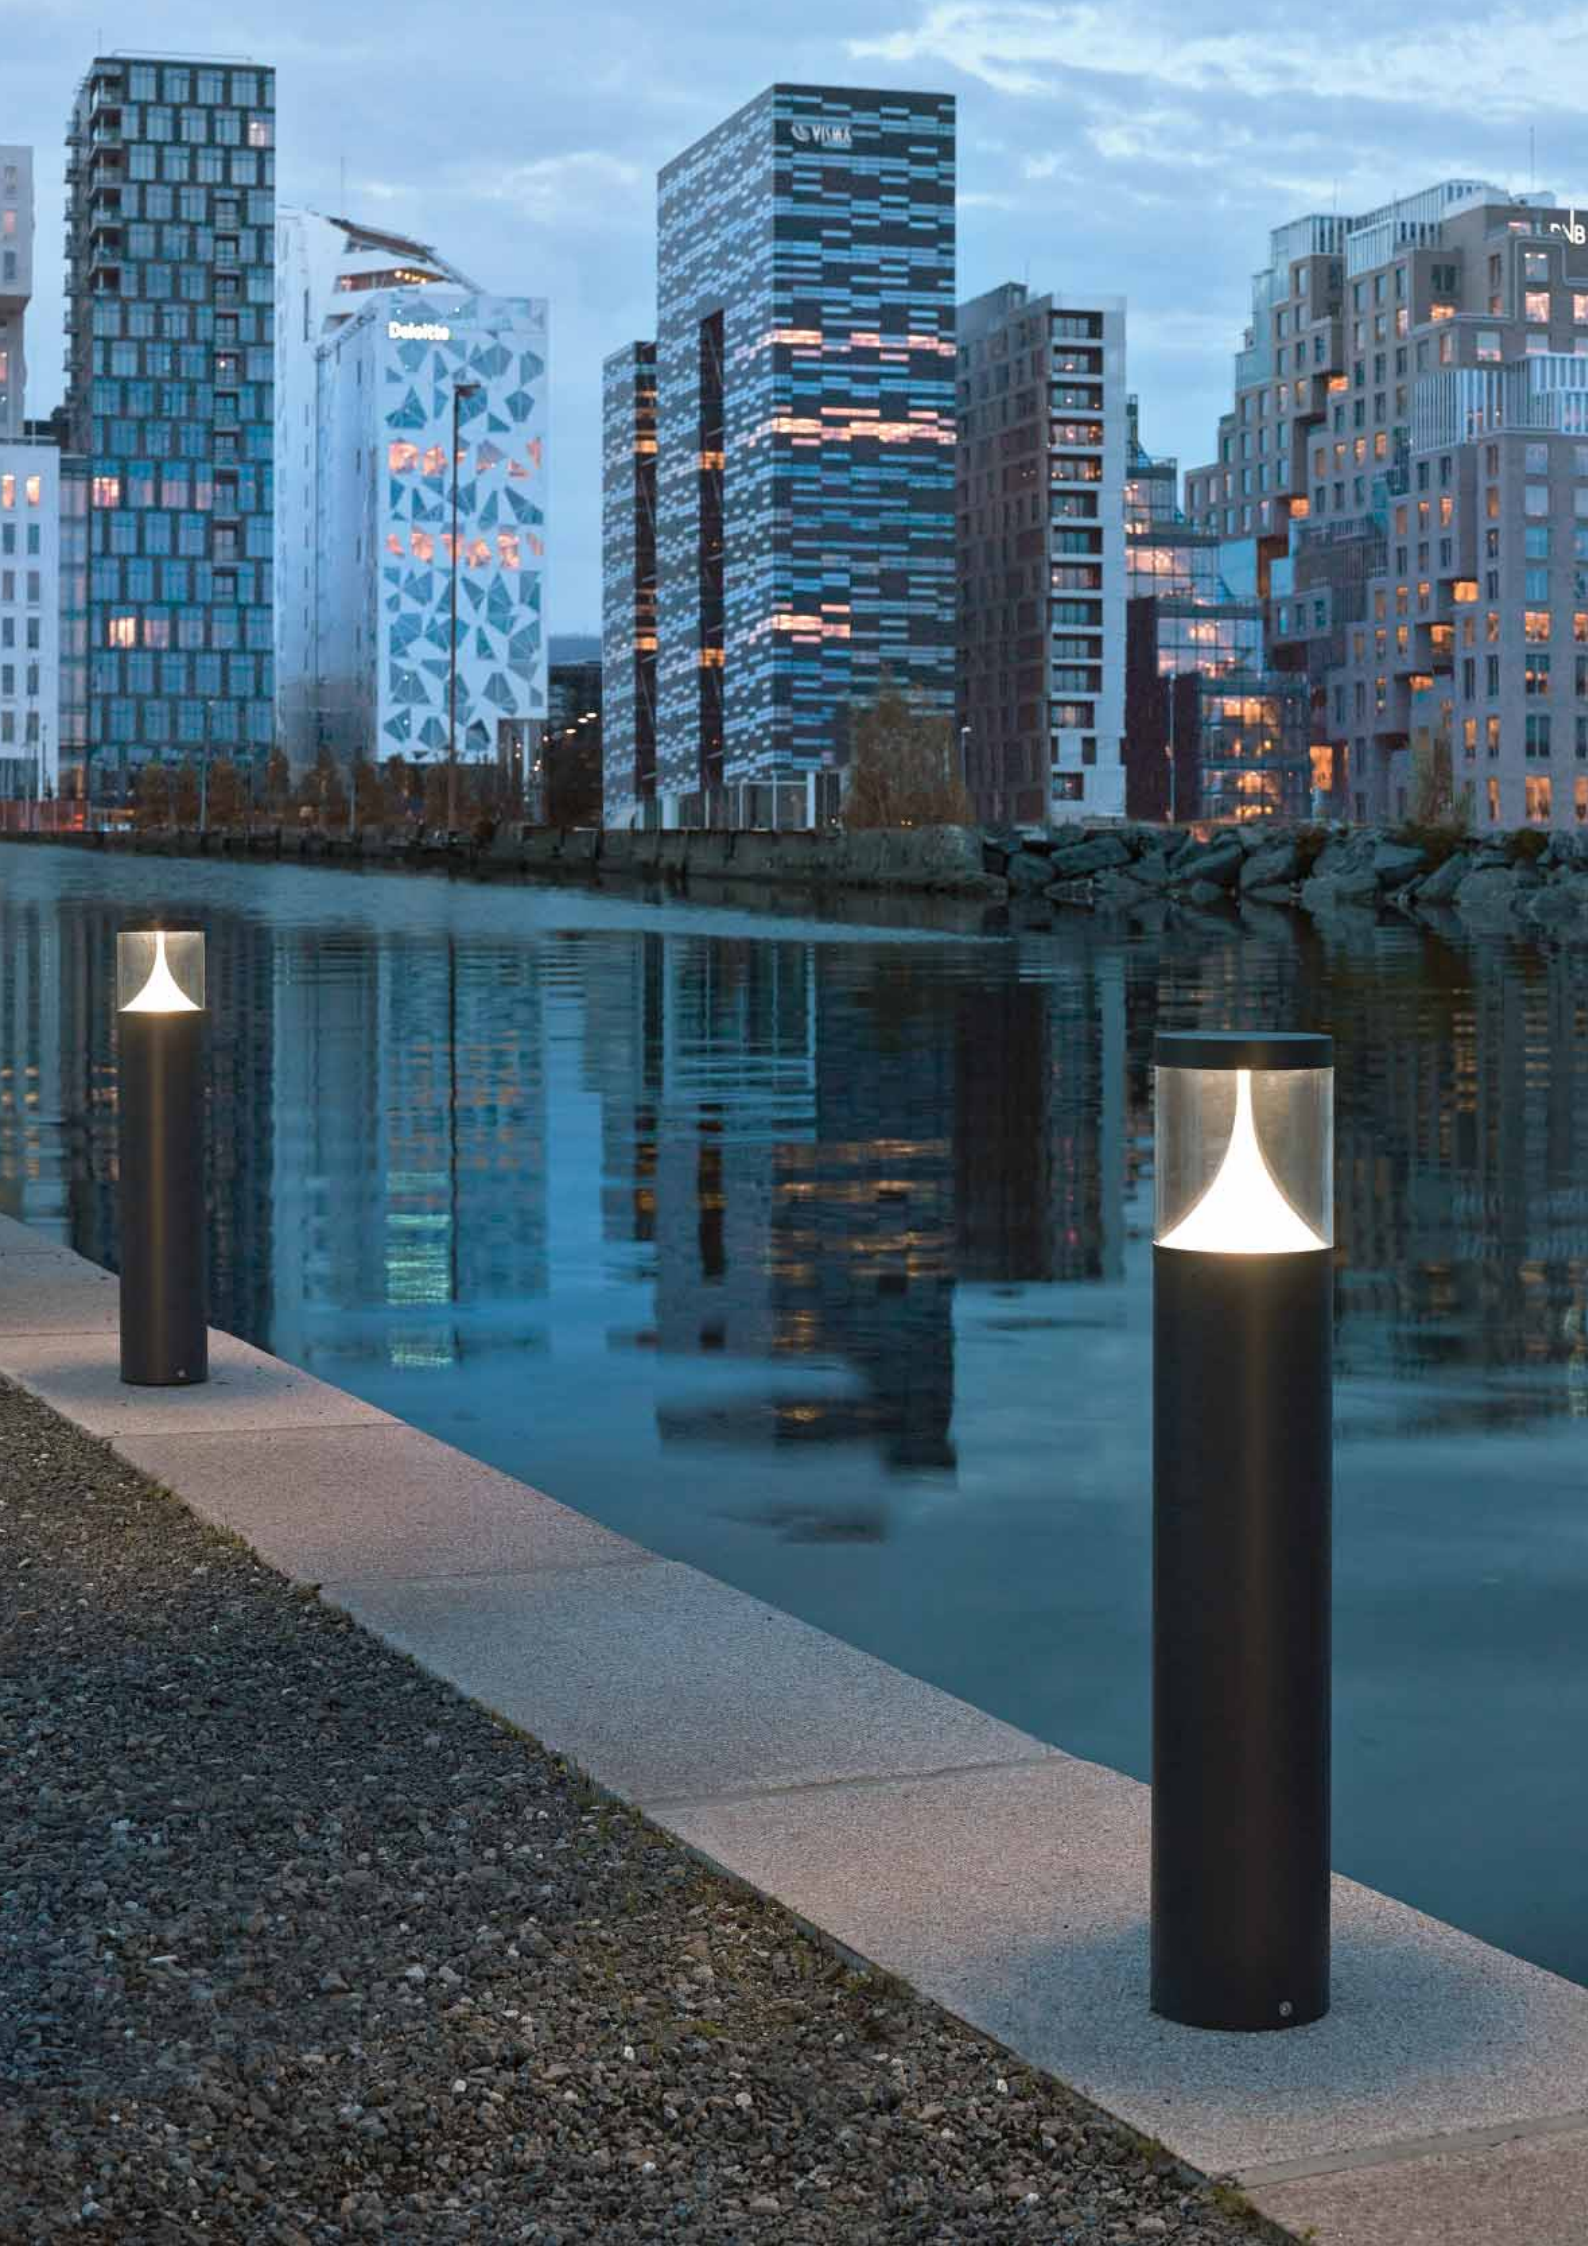

Deloitte
VISMA



NARVIK

LED





NARVIK
IP65, class I, IK10
Heavy duty bollard.
Powder coated aluminium bollard. Glare free with indirect light effect on internal conical tube. Lens stabilised polycarbonate, vandal resistant.

Concreting anchor: included.

Art. 557
24,6W LED
Aluminium, 557AL
Graphite, 557GR
LED module: 3137 lm, 3000K, 50000h, EEI: A++

**** Narvik with 4000K and Dali available by request, contact your supplier.***

SKI

NEW

LED





ARVIKA


NEW


LED













SKI
IP44, class I

New wall luminaires available with two 230V connectors (Art. 1390) or without (Art. 1392) for outdoor use. Separate cable connection for sockets and light source.

Excellent 2 in 1 solution for many applications.

Art. 1390
6W LED
Galvanized steel, 1390GA
Black, 1390B
LED Module: 628 lm, 3000K
50000h, EEI: A++

Art. 1392
6W LED
Galvanized steel, 1392GA
Black, 1392B
LED Module: 628 lm, 3000K
50000h, EEI: A++

ARVIKA
IP44, class I

Arvika Art. 893 and 899 is delivered with two F type (SHUKO), automatic fuses and circuit breaker.

Art. 893/899 are not intended for charging EI / hybrid cars or for use on piers near the sea.

*Any use mentioned above results in the complete loss of all warranty and liability claims of the buyer.

Art. 891
11,3W LED
Galvanized steel, 891GA
Black, 891B
LED module: 1120 lm,
3000K, 50000h, EEI: A+

Art. 893
11,3W LED
Galvanized steel, 893GA
Black, 893B
LED module: 1120 lm,
3000K, 50000h, EEI: A+

Art. 898
E27, 46W Halo. max.
Galvanized steel, 898GA
Black, 898B

Art. 899
E27, 46W Halo. max.
Galvanized steel, 899GA
Black, 899B

Accessories
Supplied with concrete anchor kit as standard.


SANDE























SANDE series
IP65, class I

Landscape and shop lighting fixture in aluminium.
Adjustable head for tilting.

Art. 1590
(Wall, short arm)
5,5W, LED, GU10
Graphite, 1590GR
Black, 1590B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1591
(Wall, short arm)
8,6W, LED
Graphite, 1591GR
Black, 1591B
LED module: 750 lm, 3000K, 50000h, 40D, EEI: A+

Art. 1592
(5m cable and plug incl. spike)
5,5W, LED, GU 10
Graphite, 1592GR
Black, 1592B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1593
(5m cable and plug incl. spike)
8,6W, LED
Graphite, 1593GR
Black, 1593B
LED module: 750 lm, 3000K, 50000h, 40D, EEI: A+
(For use as wall application remove spike)

Art. 1594
(Ground, short arm)
8,6W, LED
Graphite, 1594GR
Black, 1594B
LED module: 750 lm, 3000K, 50000h, 40D, EEI: A+

Art. 1598
5,5W, LED, GU10
Graphite, 1598GR
Black, 1598B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1596
(Ground, long arm)
8,6W, LED
Graphite, 1596GR
Black, 1596B
LED module: 750 lm, 3000K, 50000h, 40D, EEI: A+

Art. 1599
5,5W, LED, GU10
Graphite, 1599GR
Black, 1599B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+


Accessories
Art. 1233
Cap

Accessories
Art. 1234
Spike for:
Art. 1594
Art. 1596
Art. 1598
Art. 1599



4B

VOSS











VOSS
IP 54, Class I

Die cast aluminium
up and down wall light.




ART. 783
70W HIT-CE, G12
Aluminium, 783AL
Graphite, 783GR




ART. 780
70W HIT-CE, G12
Aluminium, 780AL
Graphite, 780GR

ART. 1950
20,8W LED
Aluminium, 1950AL
Graphite, 1950GR
LED module: 1830 lm,
3000K, 50000h, EEI: A+



ART. 784
70W HIT-CE, G12
Aluminium, 784AL
Graphite, 784GR



ART. 785
70W HIT-CE, G12
Aluminium, 785AL
Graphite, 785GR

ART. 1951
14,9W LED
Aluminium, 1951AL
Graphite, 1951GR
LED module: 1220 lm,
3000K, 50000h, EEI: A+






LILLEHAMMER

LED










Lillehammer
IP 65, Class I


Die cast aluminium.
Clear glass.
Art 1580, 1582 and 1584 can be turned both ways.



Art. 1580
2x4W LED
Aluminium, 1580AL
Graphite, 1580GR
White, 1580W
Black, 1580B
LED module: 2x305 lumen, 3000K, 50000h, EEI: A+




Art. 1581
2x4W LED
Aluminium, 1581AL
Graphite, 1581GR
White, 1581W
Black, 1581B
LED module: 2x305 lumen, 3000K, 50000h, EEI: A+



Art. 1582
4W LED
Aluminium, 1582AL
Graphite, 1582GR
White, 1582W
Black, 1582B
LED module: 305 lumen, 3000K, 50000h, EEI: A+



Art. 1583
2x4W LED
Aluminium, 1583AL
Graphite, 1583GR
White, 1583W
Black, 1583B
LED module: 2x305 lumen, 3000K, 50000h, EEI: A+



Art. 1584
4W LED
Aluminium, 1584AL
Graphite, 1584GR
White, 1584W
Black, 1584B
LED module: 305 lumen, 3000K, 50000h, EEI: A+

**** Lillehammer with 4000K available by request, contact your supplier.***

HELSINKI

E27







KIRUNA


E27 LED











KIRUNA
IP65, class II
Heavy duty anti vandal fixture. Powder coated aluminium. Supplied with a 4mm anti vandal UV polycarbonate lens.

KIRUNA
Art. 596
18,8W LED
Opal lens
Aluminium, 596AL
Graphite, 596GR
LED Module: 2000 lm, 3000K, 50000h, EEI: A+

KIRUNA
Art. 597
E27, 46W Halo. max.
Clear lens
Aluminium, 597AL
Graphite, 597GR
EEI: A+..D

Art. 598
E27, 46W Halo. max.
Opal lens
Aluminium, 598AL
Graphite, 598GR
EEI: A+..D

HELSINKI
IP 54
Powder coated aluminium wall light. Available in a bent or straight arm option.

Supplied with clear poly-carbonate lens.

HELSINKI
ART. 882
E27, 77W Halo. max.
class II
Aluminium, 882AL
Graphite, 882GR
EEI: A+..D

Accessories
Art. 156
Corner bracket for art 882.
Aluminium, 156AL
Graphite, 156GR

HELSINKI
ART. 886
E27, 77W Halo. max.
class I
Aluminium, 886AL
Graphite, 886GR
EEI: A+..D

Accessories
Art. 158
Corner bracket for art 886.
Aluminium, 158AL
Graphite, 158GR



NAMSOS

LED








NAMSOS

NEW

LED






NAMSOS
IP 65, class I
Recessed wall lighting and bollard in powder painted aluminium cast.


Wall fixture incl. recessing box.

*** Namsos wall and bollard with 4000K available by request, contact your supplier.**



Namsos
Art. 1930
12,7W LED
Aluminium, 1930AL
Graphite, 1930GR
LED modul: 1376 lm, 3000K
50000h, EEI: A++

Namsos
Art. 1931
12,7W LED
Aluminium, 1931AL
Graphite, 1931GR
LED modul: 1376 lm, 3000K
50000h, EEI: A++



Namsos
Art. 1932
12,7W LED
Aluminium, 1932AL
Graphite, 1932GR
LED modul: 1376 lm, 3000K
50000h, EEI: A++


Accessories for 1931 and 1932
Art. 112
Concreting anchor for Art. 1931 and 1932

Art. 113
Concreting anchor for Art. 1931 and 1932

Namsos
IP44, class I
Recessed wall light with galvanized finish.

Wall fixture incl. recessing box.

NEW



Namsos
Art. 1933
6W LED
Galvanized, 1933GA
LED Module: 628 lm, 3000K
50000h, EEI: A++




NAMSOS MINI

LED








NAMSOS/NAMSOS MINI
IP65, class I
Recessed wall light.

Wall fixture incl. recessing box.

Namsos Mini
Art. 1340
4W LED
Aluminium, 1340AL
Graphite, 1340GR
White, 1340W
LED modul: 352 lm, 3000K
50000h, dimmable (Triac), EEI: A




GRIMSTAD











GRIMSTAD
IP 65, class I
Recessed wall lighting fixture incl. recessing box.

Art. 1544
6W LED
Open frame, white tempered safety glass.
Aluminium, 1544AL
Graphite, 1544GR
LED Module: 628 lm, 3000K, 50000h, EEI: A++

Art. 1546
E14, 46W Halo. max.
Aluminium, 1546AL
Graphite, 1546GR
EEI: A+..D

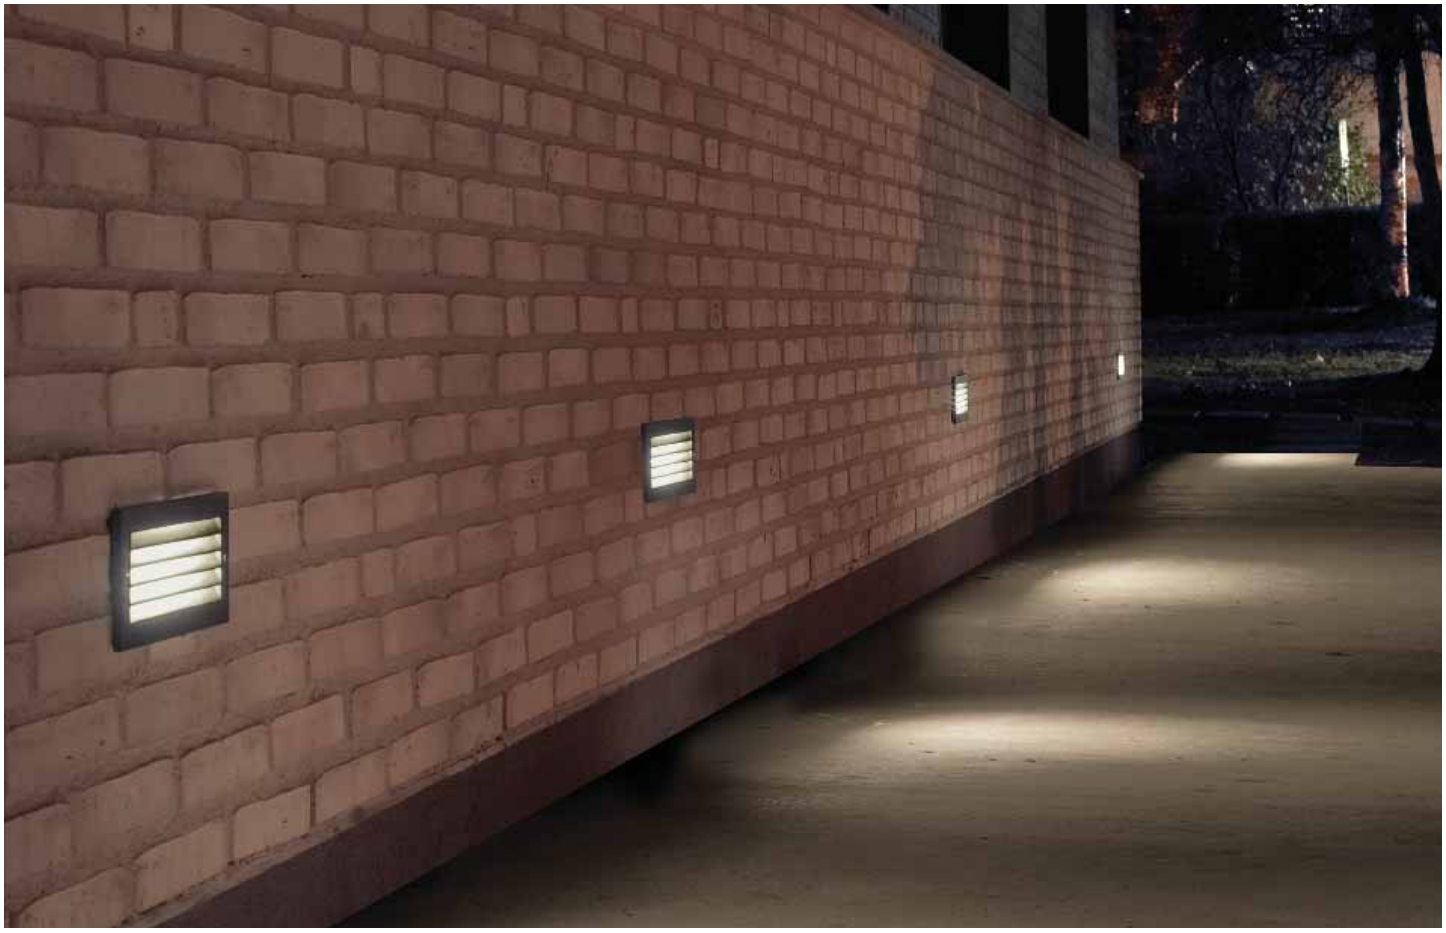


GRIMSTAD









GRIMSTAD
IP 65, class I
Recessed wall lighting fixture incl. recessing box.

Art. 1545
8,9W LED
Louvered frame, white tempered safety glass.
Aluminium, 1545AL
Graphite, 1545GR
LED Module: 981 lm, 3000K, 60000h, EEI: A++

*** Grimstad LED with 4000K available by request, contact your supplier.**

Art. 1547
E14, 46W Halo. max.
Aluminium, 1547AL
Graphite, 1547GR
EEI: A+..D




RENA


NEW

GU10 GU10 LED









RENA
IP 68, class I
Cast aluminium inground lighting fixture.
Tempered safety glass (max. 1000Kg), aluminium cover.

Polypropylene box for installation included.

Art 1630 and 1632: 2 x PG plugs in stainless steel for cable 8-12mm included, but without cable and bulb

Art. 1631 and 1633
standard with 3 m cable, one PG plug + included 5,5W GU10, 375lm, 3000K, 36D

Art. 1630
Round model
LED, GU10, 6W max.
Frosted glass
Black, 1630B
EEI: A+..D

Art. 1631
Round model
5,5W LED, GU 10
Frosted glass
Black, 1631B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1632
Square model
LED, GU10, 6W max.
Frosted glass
Black, 1632B
EEI: A+..D

Art. 1633
Square model
5,5W LED, GU 10
Frosted glass
Black, 1633B
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+



RENA








GU10 GU10 LED











RENA
IP 68, class I
Cast aluminium inground lighting fixture.
Tempered safety glass (max. 2000Kg) , stainless steel 316L cover ring.

Rena
Art. 1550, 1551, 1554, 1555: with 3 m cable, one plug + included 5,5W GU10, 375lm, 3000K, 36D

Art. 1552, 1553, 1556, 1557 2 plugs, without cable and bulb , but two plugs

Art. 1550
Round model
5,5W LED, GU 10
Clear glass
Stainless steel, 1550ST
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1552
Round model
LED, GU10, 6W max.
Clear glass
Stainless steel, 1552ST
EEI: A+..D

Art. 1554
Round model
5,5W LED, GU 10
Frosted glass
Stainless steel, 1554ST
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1556
Round model
LED, GU10, 6W max.
Frosted glass
Stainless steel, 1556ST
EEI: A+..D


Art. 1551
Square model
5,5W LED, GU 10
Clear glass
Stainless steel, 1551ST
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1553
Square model
LED, GU10, 6W max.
Clear glass
Stainless steel, 1553ST
EEI: A+..D

Art. 1555
Square model
5,5W LED, GU 10
Frosted glass
Stainless steel, 1555ST
5,5W LED GU10 included, 375 lm, 3000K, 40000h, 36D, EEI: A+

Art. 1557
Square model
LED, GU10, 6W max.
Frosted glass
Stainless steel, 1557ST
EEI: A+..D





ASKER WALL
IP 65, class I
Cast aluminium powder coated wall light.
Supplied with structure polycarbonate lens

For best light distribution we recommend LED version.




Art. 1513
E27, 46W Halo. max.
Aluminium, 1513AL
Graphite, 1513GR
White, 1513W
Black, 1513B
EEI: A+..D

Art. 1510
8,6W LED
Aluminium, 1510AL
Graphite, 1510GR
White, 1510W
Black, 1510B
LED Module: 800 lm, 3000K, 50000h, EEI: A+



Art. 1514
E27, 46W Halo. max.
Aluminium, 1514AL
Graphite, 1514GR
White, 1514W
Black, 1514B
EEI: A+..D

Art. 1511
8,6W LED
Aluminium, 1511AL
Graphite, 1511GR
White, 1511W
Black, 1511B
LED Module: 800 lm, 3000K, 50000h, EEI: A+



ASKER WALL (Big)
IP65, class I

Cast aluminium powder coated wall light.
Supplied with structure polycarbonate lens

For best light distribution we recommend LED version.

**** Asker Big wall with 4000K or Dali available by request, contact your supplier.***



Art. 1300
9,3W LED
Aluminium, 1300AL
Graphite, 1300GR
White, 1300W
Black, 1300B
LED Module: 2x628 lm, 3000K, 50000h, EEI: A++

Art. 1303
E27, 46W Halo. max.
Aluminium, 1303AL
Graphite, 1303GR
White, 1303W
Black, 1303B
EEI: A+..D



Art. 1302
6W LED
Aluminium, 1302AL
Graphite, 1302GR
White, 1302W
Black, 1302B
LED Module: 628 lm, 3000K, 50000h, EEI: A++

Art. 1305
E27, 46W Halo. max.
Aluminium, 1305AL
Graphite, 1305GR
White, 1305W
Black, 1305B
EEI: A+..D

ASKER













ASKER


NEW











ASKER WALL
IP44, class I
Front in Galvanized steel and wallplate in aluminium. Supplied with structure polycarbonate lens.

For best light distribution we recommend LED version.

NEW




Art. 1700
8,6W LED
Galvanized, 1700GA
LED Module: 800 lm, 3000K, 50000h, EEI: A+

Art. 1702
E27, 46W Halo. max.
Galvanized, 1702GA



Art. 1705
8,6W LED
Galvanized, 1705GA
LED Module: 800 lm, 3000K, 50000h, EEI: A+

Art. 1707
E27, 46W Halo. max.
Galvanized, 1707GA



ASKER WALL (Big)
IP44, class I
Front in Galvanized steel and wallplate in aluminium. Supplied with structure polycarbonate lens.

For best light distribution we recommend LED version.

NEW



Art. 1710
9,3W LED
Galvanized, 1710GA
LED Module: 2x628 lm, 3000K, 50000h, EEI: A++

Art. 1712
E27, 46W Halo. max.
Galvanized, 1712GA
EEI: A+..D



Art. 1715
6W LED
Galvanized, 1715GA
LED Module: 628 lm, 3000K, 50000h, EEI: A++

Art. 1717
E27, 46W Halo. max.
Galvanized, 1717GA
EEI: A+..D



ASKER BOLLARD

LED






ASKER POLE

NEW

LED







ASKER BOLLARD
IP65, class I


Powder coated aluminium bollard. Ideal for path-way lighting where light pollution is an issue.


Art. 1311
11,3W LED
Aluminium, 1311AL
Graphite, 1311GR
Black, 1311B
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

Art. 1312 (Dali)
11,6W LED
Aluminium, 1312AL
Graphite, 1312GR
Black, 1312B
LED Module: 1100 lm, 3000K, 50000h, EEI: A+
Dali, dimmable, 1..100% dali interface
***By request**

Accessories for 1311 and 1312
Art. 1907
Concreting anchor

Art. 1908
Anchoring support





ASKER POLE
IP65, class I

Powder coated aluminium pole. Ideal for path-way lighting where light pollution is an issue.

Art. 1360 is a 2 part pole, suitable for pallet transport.

Art. 1363 is a pole in one piece.

NEW

Art. 1360
18,2W LED
Aluminium, 1360AL
Graphite, 1360GR
Black, 1360B
LED Module: 1710 lm, 3000K, 50000h, EEI: A+
Dimming: Phase cut-off

Art. 1363
18,2W LED
Aluminium, 1363AL
Graphite, 1363GR
Black, 1363B
LED Module: 1710 lm, 3000K, 50000h, EEI: A+
Dimming: Phase cut-off

Accessories for 1360 and 1363
Art. 116
Concreting anchor

Art. 117
Anchoring support




Foto: Lars Melkevik

GENEVE

E27 LED







GENEVE
IP 54, class I
Cast aluminium powder coated up and down wall light, supplied with satin lens.

* For best light distribution we recommend version with LED

ART. 874
E27, 46W Halo. max
Aluminium, 874AL
Graphite, 874GR
White, 874W
Black, 874B
EEI: A+..D

Art. 879
8,6W LED
Aluminium, 879AL
Graphite, 879GR
White, 879W
Black, 879B
LED Module: 800 lm, 3000K, 50000h, EEI: A+

HITRA

NEW

LED





MANDAL


NEW

GU10 GU10 LED










HITRA
IP65, class I
Cast aluminium powder coated down wall light, supplied with tempered clear glass

HITRA
Art. 1330
11,3W LED
Aluminium, 1330AL
Graphite, 1330GR
White, 1330W
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

MANDAL
IP44, class I
Wallplate and front in Galvanized steel, tempered clear glass


Art. 1370 and 1371
Up and down wall light

Art. 1373 and 1374
Down wall light



MANDAL
ART. 1370
2x3,9W, LED, GU 10
Galvanized, 1370GA
2x3,9W LED GU10 included, 2x265 lm, 2700K, 40000h, 25D, EEI: A+

ART. 1371
2x25W max, GU 10
Galvanized, 1371GA
EEI: A+..D



MANDAL
ART. 1373
3,9W, LED, GU 10
Galvanized, 1373GA
3,9W LED GU10 included, 265 lm, 2700K, 40000h, 25D, EEI: A+

ART. 1374
25W max, GU 10
Galvanized, 1374GA
EEI: A+..D








SANDVIK


GU10 GU10 LED














SANDVIK
class I
Powder coated aluminium.
Tempered glass.

Art. 791 and 792
Up and down wall light
IP 65

Art. 793 and 794
Down wall light
IP 65

Art. 795 and 796
Down ceiling light.
IP 54

ART. 791
2x25W max, GU 10
Aluminium, 791AL
Graphite, 791GR
White, 791W
Black, 791B
EEI: A+..D

ART. 792
2x3,9W, LED, GU 10
Aluminium, 792AL
Graphite, 792GR
White, 792W
Black, 792B
2x3,9W LED GU10 included,
2x265 lm, 2700K, 40000h,
25D, EEI: A+

ART. 793
25W max, GU 10
Aluminium, 793AL
Graphite, 793GR
White, 793W
Black, 793B
EEI: A+..D

ART. 794
3,9W, LED, GU 10
Aluminium, 794AL
Graphite, 794GR
White, 794W
Black, 794B
3,9W LED GU10 included,
265 lm, 2700K, 40000h,
25D, EEI: A+

ART. 795
25W max, GU 10
Aluminium, 795AL
Graphite, 795GR
White, 795W
Black, 795B
EEI: A+..D

ART. 796
3,9W, LED, GU 10
Aluminium, 796AL
Graphite, 796GR
White, 796W
Black, 796B
3,9W LED GU10 included,
265 lm, 2700K, 40000h,
25D, EEI: A+

VASA














VASA
IP65, class I

Powder coated cast aluminium up and down wall light. Supplied with optical structure polycarbonate lens to give even light distribution.

Art. 120
E27, 57W Halo. max
Aluminium, 120AL
Graphite, 120GR
White, 120W
Black, 120B
EEI: A+..D

Art. 127
E27, 8,5W
Aluminium, 127AL
Graphite, 127GR
White, 127W
Black, 127B
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

Art. 128
9,3W LED
Aluminium, 128AL
Graphite, 128GR
White, 128W
Black, 128B
LED Module: 2x628 lm, 3000K, 50000h, EEI: A++

**** Vasa with 4000K and Dali available by request, contact your supplier.***





HALDEN








E27 LED





HALDEN
IP65, class I
Powder coated cast aluminium wall light. Supplied with optical structure polycarbonate lens to give even light distribution.

Art. 510
E27, 57W Halo. max
Aluminium, 510AL
Graphite, 510GR
White, 510W
EEI: A+..D

Art. 515
E27, 8,5W
Aluminium, 515AL
Graphite, 515GR
White, 515W
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

Art. 517
8,8W LED
Aluminium, 517AL
Graphite, 517GR
White, 517W
LED Module: 1027 lm, 3000K, 50000h, EEI: A++

Halden with 4000K and Dali available by request, contact your supplier

RONDANE

E27 LED






BORNHOLM

LED










RONDANE
IP65, class I

Powder coated aluminium wall light supplied with polycarbonate lens.
Rondane is suitable for wall and ceiling mounting.

RONDANE
Art. 537
11,3W LED
Aluminium, 537AL
Graphite, 537GR
White, 537W
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

Art. 538
9W max, E27, LED
Aluminium, 538AL
Graphite, 538GR
White, 538W
EEI: A+..D
Only for use with LED retrofit bulb. Not included.

RONDANE
Art. 539
18,8W LED
Aluminium, 539AL
Graphite, 539GR
White, 539W
LED Module: 2000 lm, 3000K, 50000h, EEI: A+



BORNHOLM
IP65, class I

Powder coated aluminium wall light supplied with polycarbonate lens.
Bornholm is suitable for wall and ceiling mounting.

BORNHOLM
Art. 541
11,3W LED
Aluminium, 541AL
Graphite, 541GR
White, 541W
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

Art. 542
18,8W LED
Aluminium, 542AL
Graphite, 542GR
White, 542W
LED Module: 2000 lm, 3000K, 50000h, EEI: A+








BERN

E27 LED









BERN
IP54, class I

Wallplate in aluminium. Front in Galvanized steel, stainless steel, powder coated black steel. Heavy clear or frosted glass. We use stainless steel 316L. An oil application from time to time insures long time beauty of the fixture.

Art. 650
E27, 46W Halo. max
clear glass
Stainless steel, 650ST
Galvanized, 650GA
Black, 650B
EEI: A+..D

Art. 651
E27, 46W Halo. max
frosted glass
Stainless steel, 651ST
Galvanized, 651GA
Black, 651B
EEI: A+..D

Art. 655
6W LED
frosted glass
Stainless steel, 655ST
Galvanized, 655GA
Black, 655B
LED Module: 628 lm, 3000K 50000h, EEI: A++

Art. 657
4,5W LED
frosted glass
Stainless steel, 657ST
Galvanized, 657GA
Black, 657B
LED Module: 428 lm, 3000K 50000h, EEI: A+
dimmable (Triac)





BASEL






E27 LED









BASEL
IP54, class I

Wallplate in aluminium. Front in Galvanized steel, stainless steel, powder coated black steel.

Heavy clear or frosted glass.
We use stainless steel 316L.
An oil application from time to time insures long time beauty of the fixture.

*Also available (on request) models with motion detectors.

Art. 660
E27, 57W Halo. max
clear glass
Stainless steel, 660ST
Galvanized, 660GA
Black, 660B
EEI: A+..D

Art. 661 *
E27, 57W Halo. max
frosted glass
Stainless steel, 661ST
Galvanized, 661GA
Black, 661B
EEI: A+..D

Art. 668
6W LED
frosted glass
Stainless steel, 668ST
Galvanized, 668GA
Black, 668B
LED Module: 628 lm, 3000K
50000h, EEI: A++

Art. 681
4,5W LED
frosted glass
Stainless steel, 681ST
Galvanized, 681GA
Black, 681B
LED Module: 428 lm, 3000K
50000h, EEI: A+
dimmable (Triac)






BODEN

E27 LED









BODEN
IP54, class I.
Wallplate in aluminium.
Front in Galvanized steel, powder coated aluminium

Art. 860, 866:
Opal polycarbonate

Art. 862: Clear polycarbonate

Art.860
E27, 46W Halo. max
Galvanized steel, 860GA
Black, 860B
EEI: A+..D

Art.862
E27, 46W Halo. max
Galvanized steel, 862GA
Black, 862B
EEI: A+..D

Art. 866
8,6W LED
Galvanized, 866GA
Black, 866B
LED Module: 800lm, 3000K, 50000h, EEI: A+










NORDLAND

E27 LED Sensor







NORDLAND
IP65, class I, IK10
Powder coated aluminium wall light supplied with opal polycarbonate lens.

Nordland is suitable for wall and ceiling mounting.

Art. 718
11,3W LED
Aluminium, 718AL
Graphite, 718GR
White, 718W
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

Art. 719
12,9W LED
Aluminium, 719AL
Graphite, 719GR
White, 719W
LED Module: 1500lm, 3000K, 50000h, EEI: A+

Art. 5040
13,6W LED
Aluminium, 5040AL
Graphite, 5040GR
White, 5040W
LED Module: 1500lm, 3000K, 50000h, EEI: A+

Light engine with integrated HF sensor (motion, dimming, auto off at daylight)

Art. 5041
18,8W LED
Aluminium, 5041AL
Graphite, 5041GR
White, 5041W
LED Module: 2000lm, 3000K, 50000h, EEI: A+

NEW

Art. 7120
2x max 9W, E27, LED
Aluminium, 7120AL
Graphite, 7120GR
White, 7120W
EEI: A+..D
Only for use with LED retrofit bulb. Not included.


*** Nordland with 4000K available by request, contact your supplier.**




LILLESAND

NEW

E27 LED







LILLESAND
IP65, Class II

Powder coated
aluminium bollard.

NEW

Art. 1380
E27, 46W Halo. max
Aluminium, 1380AL
Graphite, 1380GR
EEI: A+..d

Art. 1382
E27, 8,5W
Aluminium, 1382AL
Graphite, 1382GR
8,5W LED E27 included,
806 lm, 2700K, 25000h,
dimmable, EEI: A+

Accessories for Art. 1380 and 1382

Art. 205
Concreting anchor


Art. 206
Anchoring support

OPPLAND

LED







OPPLAND
IP54, Class I
Powder coated aluminium bollard. Ideal for path-way-lighting where light pollution is an issue.

Art. 1321
10,7W LED
Aluminium, 1321AL
Graphite, 1321GR
LED module: 1180 lm, 3000K, 50000h, EEI: A++

Accessories for Art. 1321
Art. 205
Concreting anchor

Art. 206
Anchoring support






MOLDE

LED







MOLDE
IP54, class I
Powder coated aluminium bollard.
Ideal for path-way-lighting where light pollution is an issue.

Art. 1901
8,6W LED
Aluminium, 1901AL
Graphite, 1901GR
LED Module: 800 lm, 3000K, 50000h, EEI: A+

Accessories
Art. 1906
Reinforced galvanized metal foot for Molde

Art. 1907
Concreting anchor for Molde

Art. 1908
Anchoring support for Molde

SCANDINAVIAN WOOD





Our range of wooden bollards fits perfectly to all projects combining modern lighting in harmony with natural materials.
We use a selection of first class Scandinavian pine wood, impregnated for protection.
Easy maintenance: painted twice during production, refresh the surface with oil paint.
Special marked with *:
Impregnated only: without painting on request to allow customized colours.

HALMSTAD





STOCKHOLM






ALTA





Scandinavian Wood
IP65, class II


Accessories for Scandinavian wood.
Art. 205
Concreting anchor for wood series.
Art. 206
Anchoring support for wood series.




Art. 1400
E27, 46W Halo. max
Galvanized, 1400GA
Black, 1400B
EEI: A+..D




Art. 1410
E27, 46W Halo. max
Galvanized, 1410GA
Black 1410B
EEI: A+..D




Art. 1420
E27, 46W Halo. max
Galvanized, 1420GA
Black 1420B
EEI: A+..D



Art. 1430
E27, 46W Halo. max
Galvanized, 1430GA
Black 1430B
EEI: A+..D




Art. 1440
E27, 46W Halo. max
Galvanized, 1440GA
Black 1440B
EEI: A+..D



Art. 1450
E27, 46W Halo. max
Galvanized, 1450GA
Black 1450B
EEI: A+..D






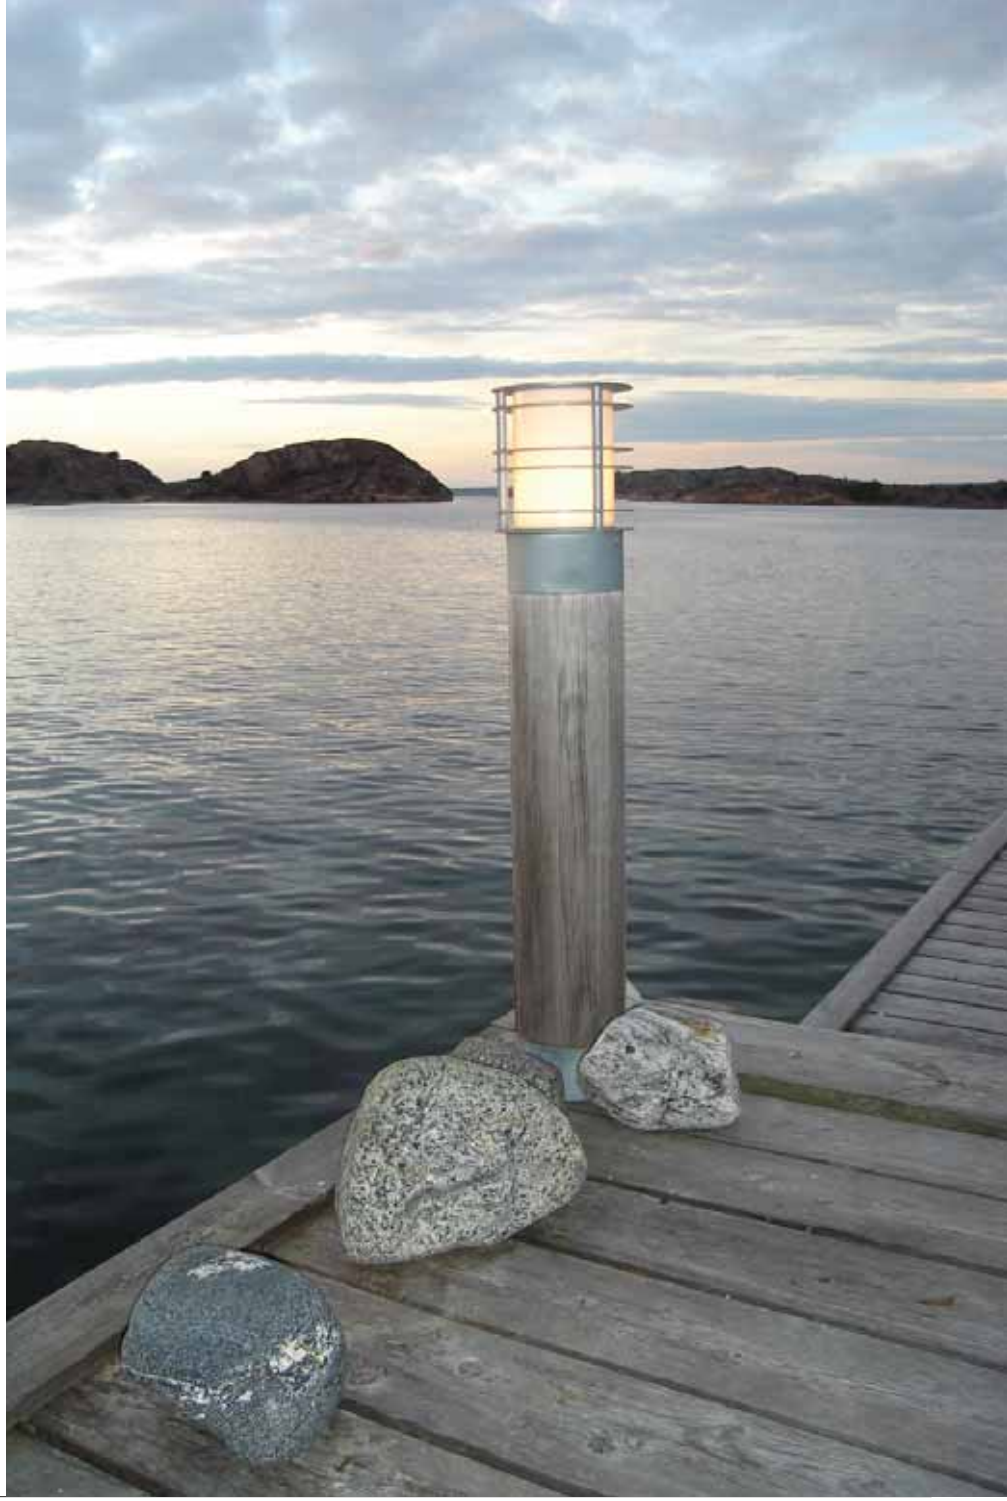


Scandinavian Wood
IP65, class II
Impregnated only.

Accessories for Scandinavian wood.
Art. 205
Concreting anchor for wood series.
Art. 206
Anchoring support for wood series.




Art. 1403 *
E27, 46W Halo. max
Galvanized, 1403GA
Black, 1403B
EEI: A+..D




Art. 1413 *
E27, 46W Halo. max
Galvanized, 1413GA
Black, 1413B
EEI: A+..D




Art. 1423 *
E27, 46W Halo. max
Galvanized, 1423GA
Black, 1423B
EEI: A+..D



Art. 1433 *
E27, 46W Halo. max
Galvanized, 1433GA
Black, 1433B
EEI: A+..D



Art. 1443 *
E27, 46W Halo. max
Galvanized, 1443GA
Black, 1443B
EEI: A+..D




Art. 1453 *
E27, 46W Halo. max
Galvanized, 1453GA
Black, 1453B
EEI: A+..D


* Impregnated only: without painting on request to allow customized colours.


HALMSTAD


E27 LED
















HALMSTAD
IP65, class II.
Bollards with
LED MODULE: class I

Galvanized heavy duty steel bollard supplied with opal polycarbonate lens.

Accessories for Halmstad range
Art. 205
Concreting anchor

Art. 206
Anchoring support

Art. 210
E27, 46W Halo. max
Galvanized, 210GA
Black, 210B
Graphite, 210GR
EEI: A+..D

Art. 211
9,5W LED
Galvanized, 211GA
Black, 211B
Graphite, 211GR
LED module> 900 lm, 3000K, 50000h, EEI: A+ dimmable (Triac)

Art. 295
E27, 46W Halo. max
Galvanized, 295GA
Black, 295B
Graphite, 295GR
EEI: A+..D

Art. 1488
E27, 8,5W
Galvanized, 1488GA
Black, 1488B
Graphite, 1488GR
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

Art. 1489
9,5W LED
Galvanized, 1489GA
Black 1489B
Graphite, 1489GR
LED module> 900 lm, 3000K, 50000h, EEI: A+ dimmable (Triac)

Art. 296
E27, 46W Halo. max
Galvanized, 296GA
Black, 296B
Graphite, 296GR
EEI: A+..D

Art. 1483
E27, 8,5W
Galvanized, 1483GA
Black, 1483B
Graphite, 1483GR
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

Art. 1482
9,5W LED
Galvanized, 1482GA
Black 1482B
Graphite, 1482GR
LED module> 900 lm, 3000K, 50000h, EEI: A+ dimmable (Triac)

*** With 4000K available by request, contact your supplier.**






ALTA





E27 LED











ALTA
IP65, class II

Bollards with
LED MODULE: class I

Galvanized steel bollard supplied with opal polycarbonate lens.

Accessories
Art. 205
Concreting anchor
for Alta range.
Art. 206
Anchoring support
for Alta range.

Art. 291
E27, 46W Halo. max
Galvanized, 291GA
Black 291B
EEI: A+..D

Art. 1475
E27, 8,5W
Galvanized, 1475GA
Black, 1475B
8,5W LED E27 included,
806 lm, 2700K, 25000h,
dimmable, EEI: A+

Art. 1479
9,5W LED
Galvanized, 1479GA
Black 1479B
LED module> 900 lm,
3000K, 50000h, EEI: A+
dimmable (Triac)

*** With 4000K available by request, contact your supplier.**

Art. 293
E27, 46W Halo. max
Galvanized, 293GA
Black 293B
EEI: A+..D

Art. 1477
E27, 8,5W
Galvanized, 1477GA
Black, 1477B
8,5W LED E27 included,
806 lm, 2700K, 25000h,
dimmable, EEI: A+

Art. 1476
9,5W LED
Galvanized, 1476GA
Black 1476B
LED module> 900 lm,
3000K, 50000h, EEI: A+
dimmable (Triac)







STOCKHOLM

E27 LED





STOCKHOLM FAMILY ⟶

STOCKHOLM BOLLARD
Galvanized steel bollard.
IP65, class II

Bollards with LED module : class I

Accessories
Art. 205
Concreting anchor for Stockholm range.
Art. 206
Anchoring support for Stockholm range.




Art. 288
E27, 46W Halo. max,
Opal
Galvanized, 288GA
Black, 288B
EEI: A+..D

Art. 297
E27, 46W Halo. max
Clear
Galvanized, 297GA
Black, 297B
EEI: A+..D

Art. 1265
9,5W LED
Opal
Galvanized, 1265GA
Black 1265B
LED module› 900 lm, 3000K, 50000h, dimmable triac, EEI: A+
*** With 4000K available by request, contact your supplier.**

Art. 1464
E27, 8,5W
Opal
Galvanized, 1464GA
Black, 1464B
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+




Art. 289
E27, 46W Halo. max,
Opal
Galvanized, 289GA
Black, 289B
EEI: A+..D

Art. 298
E27, 46W Halo. max
Clear
Galvanized, 298GA
Black, 298B
EEI: A+..D

Art. 1260
9,5W LED
Opal
Galvanized, 1260GA
Black 1260B
LED module› 900 lm, 3000K, 50000h, dimmable Triac, EEI: A+

Art. 1469
E27, 8,5W
Opal
Galvanized, 1469GA
Black, 1469B
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+



Art. 299
E27, 46W Halo. max,
Opal
Galvanized, 299GA
Black, 299B
EEI: A+..D

Art. 1268
9,5W LED
Opal
Galvanized, 1268GA
Black 1268B
LED module› 900 lm, 3000K, 50000h, dimmable triac, EEI: A+










STOCKHOLM

E27 LED





STOCKHOLM FAMILY ⟶



Stockholm flush
IP54, class I

Aluminium back plate. Front detail in powder coated or galvanized steel.

Art. 220
E27, 46W Halo. max.
Opal polycarbonate
Galvanized, 220GA
Black, 220B
EEI: A+..D

Art. 226
E27, 46W Halo. max
Clear polycarbonate
Galvanized, 226GA
Black, 226B
EEI: A+..D

Art. 1600
8,6W LED
Opal polycarbonate
Galvanized, 1600GA
Black, 1600B
LED Module: 800 lm, 3000K, 50000h, EEI: A+





STOCKHOLM




E27








STOCKHOLM FAMILY ⟶





Stockholm
IP54, class II

Supplied with clear polycarbonate lens as standard.

(Opal lens available as an option).

Art. 280
E27, 46W Halo. max.
clear polycarbonate.
Galvanized steel, 280GA
Black, 280B
White, 280W
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art. 280.
Galvanized steel, 153GA
Black, 153B
White, 153W

Art. 286
E27, 77W Halo. max.
clear polycarbonate.
Galvanized steel, 286GA
Black, 286B
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art. 286.
Galvanized steel, 153GA
Black, 153B




ART. 286


STOCKHOLM




















Stockholm
IP54, class II

Supplied with clear polycarbonate lens as standard.

Opal lens available as accessorie.

Art. 284
E27, 46W Halo. max.
clear polycarbonate.
Galvanized, 284GA
Black, 284B
EEI: A+..D

Art. 287
E27, 77W Halo. max.
clear polycarbonate.
Galvanized, 287GA
Black, 287B
EEI: A+..D

Art. 285
E27, 46W Halo. max.
clear polycarbonate.
Galvanized, 285GA
Black, 285B
EEI: A+..D

Art. 281
E27, 77W Halo. max.
clear polycarbonate.
Galvanized, 281GA
Black, 281B
EEI: A+..D

Art. 283
E27, 2x77W Halo. max.
clear polycarbonate.
Galvanized, 283GA
Black, 283B
EEI: A+..D

Accessories
Art. 405 Concreting anchor for Art. 281 and 283.
Art. 406 Anchoring support for Art. 281 and 283.
Concreting anchor included for Art. 284, 287 and 285

Art. 284 round foot, diameter 11,5cm.
Art. 285 and 287 round foot, diameter 17cm.
Art. 281 and 283. Diameter foot 23,5 cm. The distance between bolt holes (3 bolts) for post Art. 281 and 283 is 18 cm.










BREMEN

E27 LED







BREMEN
IP54, class I

The front cover is made of steel and mounted on an aluminium backplate.

Art. 630
E27, 46W Halo. max.
clear polycarbonate.
Galvanized, 630GA
Black, 630B
EEI: A+..D

Art. 631
E27, 46W Halo. max.
opal polycarbonate.
Galvanized, 631GA
Black, 631B
EEI: A+..D

Art. 637
11,3W LED
opal polycarbonate.
Galvanied, 637GA
Black, 637B
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

NORDKAPP

E27 LED







BERLIN

E27 LED









NORDKAPP
IP65, class I
Powder coated aluminium wall light supplied with opal polycarbonate lens.

Nordkapp is suitable for wall and ceiling mounting.

NORDKAPP
Art. 1620
11,3W LED
Aluminium, 1620AL
Graphite, 1620GR
LED Module: 1100 lm, 3000K, 50000h, EEI: A+
*** With 4000K available by request, contact your supplier.**

Art. 1621
2x max 9W, E27, LED
Aluminium, 1621AL
Graphite, 1621GR
EEI: A+..D
Only for use with LED retrofit bulb. Not included.

BERLIN
IP54, class I

Cast aluminium wall light with clear or opal polycarbonate lens options.

BERLIN
Art. 610
E27, 46W Halo. max., clear polycarbonate.
Black, 610B
White, 610W
EEI: A+..D

BERLIN
Art. 611
E27, 46W Halo. max., opal polycarbonate.
Black, 611B
White, 611W
EEI: A+..D


BERLIN
Art. 617
11,3W LED
opal polycarbonate.
Black, 617B
White, 617W
LED Module: 1100 lm, 3000K, 50000h, EEI: A+










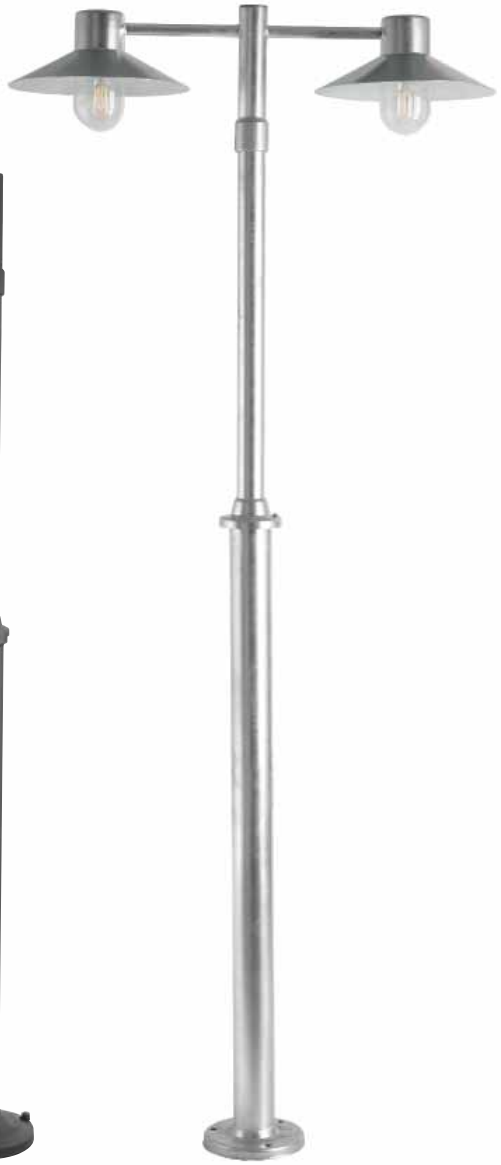



LUND











LUND
IP55, Class II,
Clear polycarbonate.

Art. 274, 275, 290
Can be ordered with frosted glass or clear polycarbonate as accessories.

Art. 290
E27, 57W Halo. max.
Galvanized, 290GA
Black, 290B
EEI: A+..D

Accessories
Art. 153
Corner bracket
for Art 290.
Galvanized steel, 153GA
Black, 153B

Art. 274
E27, 57W Halo. max.,
Galvanized, 274GA
Black, 274B
EEI: A+..D

Accessories
Art. 405
Concreting anchor
for Art. 274
Art. 406
Anchoring support
for Art. 274

Art. 275
E27, 2x57W Halo. max.
Galvanized, 275GA
Black, 275B
EEI: A+..D

Accessories
Art. 405
Concreting anchor
for Art. 275
Art. 406
Anchoring support
for Art. 275



Foto p. 83: Côté Ouest/ Jean-Marc Palisse

OSLO

E27

























OSLO

IP55, class II
Clear polycarbonate.

All Oslo models can be ordered with frosted glass or clear polycarbonate as accessories.
The copper will age naturally over time.

Art. 240
E27, 57W Halo. max.
Galvanized, 240GA
Black, 240B
Copper, 240CO
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art 240.
Galvanized, 153GA
Black, 153B
Copper, 153CO

Art. 242
E27, 2x57W Halo. max.
clear glass.
Galvanized, 242GA
Black, 242B
EEI: A+..D

Accessories
Art. 405
Concreting anchor for Art. 242.
Art. 406
Anchoring support for Art. 242

Art. 245
E27, 57W Halo. max.
clear glass
Galvanized, 245GA
Black, 245B
EEI: A+..D

Accessories
Concreting anchor included.

Art. 245 round foot, diameter 17cm.

ART. 240A (chain)
E27, 57W Halo. max.
Galvanized steel, 240A/GA
Black, 240A/B
EEI: A+..D


OSLO


LARVIK

NEW

E27







LARVIK

IP55, class II
Clear polycarbonate.

NEW

Art. 690
E27, 57W Halo. max.
Galvanized, 690GA
Black, 690B
EEI: A+..D

Accessories
Art. 153
Corner bracket for
Art 690.
Galvanized, 153GA
Black, 153B



PARIS



















PARIS
IP43, class I

This down light gives a subtle wash of light. Over time the copper will age naturally and acquire an antique brown patina.

*** With 4000K available by request, contact your supplier.**

Art. 160
E27, 30W Halo. max.
Galvanized, 160GA
Black, 160B
White, 160W
Copper, 160CO
EEI: A+..D

Art. 163
E27, 46W Halo. max.
Galvanized, 163GA
Black, 163B
White, 163W
EEI: A+..D

Art. 1495
6W LED
Galvanized, 1495GA
Black, 1495B
White, 1495W
LED Module: 628 lm, 3000K, 50000h, EEI: A++

Art. 1496
6W LED
Galvanized, 1496GA
Black, 1496B
White, 1496W
LED Module: 628 lm, 3000K, 50000h, EEI: A++

*** With 4000K available by request, contact your supplier.**

KARLSTAD





















KARLSTAD
IP55, class II
Supplied with Clear polycarbonate.

All Karlstad models can be ordered with frosted glass or clear polycarbonate as accessories.
The copper will age naturally over time.

Art. 230
E27, 57W Halo. max.
Galvanized, 230GA
Black, 230B
White, 230W
Copper, 230CO
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art 230.
Galvanized steel, 153GA
Black, 153B
White, 153W
Copper, 153CO

Art. 230A (chain)
E27, 57W Halo. max.
Galvanized, 230A/GA
Black, 230A/B
White, 230A/W
EEI: A+..D





BERGEN

E27









VANSBRO


E27











BERGEN
IP55, Class II
Supplied with clear polycarbonate lens.

Art. 270 and 271
Can be ordered with frosted glass or clear polycarbonate as accessory.

BERGEN
Art. 270
E27, 57W Halo. max.
Galvanized, 270GA
Black, 270B
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art 270.
Galvanized steel, 153GA
Black, 153B

BERGEN
Art. 271
E27, 57W Halo. max.
Galvanized, 271GA
Black, 271B
EEI: A+..D

VANSBRO
IP55, class II
Supplied with clear polycarbonate lens.

The copper will age naturally over time.

VANSBRO
Art. 1920
E27, 57W Halo. max.
Galvanized, 1920GA
Black, 1920B
White, 1920W
Copper, 1920CO
EEI: A+..D

Accessories
Art. 153
Corner bracket for Art 1920.
Galvanized steel, 153GA
Black, 153B
White, 153W
Copper, 153CO









CHELSEA



E27









CHELSEA FAMILY ⟶


CHELSEA RANGE
IP44, class II
Fabricated from copper and supplied with clear polycarbonate lens.
Copper fittings are supplied in a raw finish to alow natural patina over time.
Brackets and posts manufactured in aluminium and powder coated in black.




Art. 950
E27, 77W Halo. max.
Copper, 950CO
EEI: A+..D




Art. 962
E27, 57W Halo. max.
Copper, 962CO
EEI: A+..D



Art. 963
E27, 57W Halo. max.
Copper, 963CO
EEI: A+..D



Art. 955
E27, 77W Halo. max.
Copper, 955CO
EEI: A+..D



Art. 954
E27, 77W Halo. max.
Copper, 954CO
EEI: A+..D

Accessories
Art. 152
Corner bracket
for Art 954.
Black, 152B







CHELSEA



E27























CHELSEA RANGE
IP44, class II
Fabricated from copper and supplied with clear polycarbonate lens.
Copper fittings are supplied in a raw finish to alow natural patina over time.
Brackets and posts manufactured in aluminium and powder coated in black.

Art. 960
E27, 77W Halo. max.
Copper, 960CO
EEI: A+..D

Accessories
Art. 152
Corner bracket for Art 960.

Black, 152B

Art. 964
E27, 77W Halo. max.
Copper, 964CO
EEI: A+..D
NEW!

Art. 961
E27, 77W Halo. max.
Copper, 961CO
EEI: A+..D

Art. 956
E27, 77W Halo. max.
Copper, 956CO
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 956

Art. 957
E27, 77W Halo. max.
Copper, 957CO
EEI: A+..D


Accessories
Art. 307
Concreting anchor for Art. 957


CHELSEA











CHELSEA RANGE
IP44, class II
Fabricated from copper and supplied with clear polycarbonate lens.
Copper fittings are supplied in a raw finish to alow natural patina over time.
Brackets and posts manufactured in aluminium and powder coated in black.

Art. 951
E27, 77W Halo. max.
Copper, 951CO
EEI: A+..D

Accessories
Art. 305
Concreting anchor for Art. 951
Art. 306
Anchoring support for Art. 951

Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm.

Art. 953
E27, 2x77W Halo. max.
Copper, 953CO
EEI: A+..D

Accessories
Art. 305
Concreting anchor for Art. 953
Art. 306
Anchoring support for Art. 953

Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm.

GENOVA MINI









GENOVA







VENEDIG











GENOVA MINI
Art. 175
E27, 46W Halo. max.
IP 54, class II,
clear polycarbonate.

Black, 175B
White, 175W
EEI: A+..D



GENOVA
Art. 170
E27, 46W Halo. max.
IP54, class II,
clear polycarbonate.

Black, 170B
White, 170W
EEI: A+..D



VENEDIG
Art. 261
E27, 46W Halo. max.
IP54, class II,
clear polycarbonate.

Black, 261B
White, 261W
EEI: A+..D



ART. 170



GLASGOW





E27

LATINA




E27

ROMA




E27




GLASGOW
Art. 730
E27, 46W Halo. max.
IP54, class II,
clear polycarbonate.

Black, 730B
White, 730W
EEI: A+..D



LATINA
Art. 105
E27, 46W Halo. max.
IP44, class II,
frosted polycarbonate.

Black, 105B
White, 105W
EEI: A+..D



ROMA
Art. 169
E27, 46W Halo. max.
IP54, class II,
clear polycarbonate.

Black, 169B
White, 169W
EEI: A+..D





LOFOTEN

NEW




E27






LOFOTEN FAMILY →



LOFOTEN
IP44, class II

Classic outdoor wall, chain ceiling fixture with clear glass.


Art. 1940
Wall
E27, 57W Halo. max.
Black, 1940B
EEI: A+..D



Art. 1943
Wall with arm
E27, 57W Halo. max.
Black, 1943B
EEI: A+..D

Up & down version

NEW



Art. 1944
Ceiling chain
E27, 57W Halo. max.
Black, 1944B
EEI: A+..D

NEW



kaffebrenneriet

LOFOTEN



E27



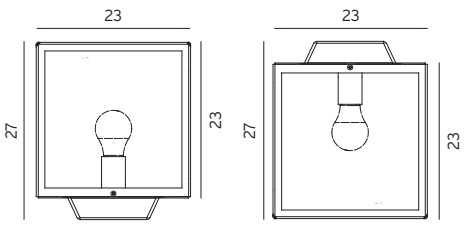

LOFOTEN
IP44, class II

Classic outdoor pedestal or ceiling fixture with clear glass.

Art. 1941
Pedestal
E27, 57W Halo. max.
Black, 1941B
EEI: A+..D

Art. 1942
Ceiling
E27, 57W Halo. max.
Black, 1942B
EEI: A+..D



LONDON

















LONDON FAMILY ⟶

All London range.
IP54, class II
Supplied with
polycarbonate lens




Art. 480
E27, 77W Halo. max.
Black, 480B
White, 480W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 480.
Black, 152B
White, 152W




Art. 490
E27, 77W Halo. max.
Black, 490B
White, 490W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 490.
Black, 152B
White, 152W




Art. 481
E27, 77W Halo. max.
Black, 481B
White, 481W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 481.
Black, 152B
White, 152W



Art. 493
E27, 77W Halo. max.
Black, 493B
White, 493W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 493.
Black, 152B
White, 152W



Art. 497
E27, 57W Halo. max.
Black, 497B
White, 497W
EEI: A+..D



ART. 490



ART. 494

LONDON










LONDON FAMILY ⟶


All London range.
IP54, class II.
Supplied with lightly tinted polycarbonate lens

Art. 484 and 485
square base- 16,5 cm. Distance between the two holes 9 cm.
Art. 494
square base- 20 cm. Distance between the two holes 9 cm.




Art. 484
E27, 77W Halo. max.
Black, 484B
White, 484W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 484




Art. 494
E27, 77W Halo. max.
Black, 494B
White, 494W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 494.




Art. 485
E27, 77W Halo. max.
Black, 485B
White, 485W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 485.



Art. 481A
E27, 77W Halo. max.
Black, 481A/B
White, 481A/W
EEI: A+..D




Art. 493A
E27, 77W Halo. max.
Black, 493A/B
White, 493A/W
EEI: A+..D

LONDON




E27


All London range.
IP54, class II.
Supplied with polycarbonate lens.
Hexagonal foot. Distance between the three holes is 20,5 cm.




Art. 491
E27, 77W Halo. max.
Black, 491B
White, 491W
EEI: A+..D




Art. 492
E27, 2x77W Halo. max.
Black, 492B
White, 492W
EEI: A+..D



Art. 483
E27, 3x77W Halo. max.
Black, 483B
White, 483W
EEI: A+..D



Art. 482
E27, 2x77W Halo. max.
Black, 482B
White, 482W
EEI: A+..D



Art. 495
E27, 3x77W Halo. max.
Black, 495B
White, 495W
EEI: A+..D

Accessories London Range

Art. 305
Concreting anchor for Art. 482, 483, 491, 492 and 495

Art. 306
Anchoring support for Art. 482, 483, 491, 492 and 495



ART. 492





MODENA



E27









MODENA FAMILY ⟶

All Modena range.
IP 54, class II.
Supplied with
polycarbonate lens.




Art. 351
E27, 77W Halo. max.
Black, 351B
White, 351W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 351.
Black, 152B
White, 152W




Art. 381
E27, 77W Halo. max.
Black, 381B
White, 381W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 381.
Black, 152B
White, 152W



Art. 350
E27, 77W Halo. max.
Black, 350B
White, 350W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 350.
Black, 152B
White, 152W



Art. 380
E27, 77W Halo. max.
Black, 380B
White, 380W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 380.
Black, 152B
White, 152W



ART. 350







MODENA













MODENA FAMILY ⟶


All Modena range.
IP 54, class II.
Supplied with polycarbonate lens



Art. 351A (chain)
E27, 77W Halo. max.
Black, 351A/B
White, 351A/W
EEI: A+..D




Art. 381A BIG (chain)
E27, 77W Halo. max.
Black, 381A/B
White, 381A/W
EEI: A+..D



Art. 300
E27, 77W Halo. max.
Black, 300B
White, 300W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 300



Art. 384
E27, 77W Halo. max.
Black, 384B
White, 384W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 384



Art. 304
E27, 77W Halo. max.
Black, 304B
White, 304W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 304


Art. 300 and 304 *Square base (16,5cm x 16,5 cm). Distance between the two holes 9 cm.*
Art. 384 *square base- 20 cm. Distance between the two holes 9 cm.*


MODENA




















All Modena range.
IP 54, class II.
Supplied with polycarbonate lens

Art. 301
E27, 77W Halo. max.
Black, 301B
White, 301W
EEI: A+..D

Art. 382
E27, 2x77W Halo. max.
Black, 382B
White, 382W
EEI: A+..D

Art. 303
E27, 3x77W Halo. max.
Black, 303B
White, 303W
EEI: A+..D

Art. 302
E27, 2x77W Halo. max.
Black, 302B
White, 302W
EEI: A+..D

Art. 397
E27, 3x77W Halo. max.
Black, 397B
White, 397W
EEI: A+..D

Accessories for Modena

Art. 305
Concreting anchor for Art. 301, 302, 303, 382 and 397

Art. 306
Anchoring support for Art. 301, 302, 303, 382 and 397

Art. 301, 302, 303, 382 and 397 Hexagonal foot. Distance between the three holes is 20,5 cm.



ART. 302





BOLOGNA



E27









Bologna range.
Class II, IP54.

Globe:
Clear polycarbonate
or opal polycarbonate
globe.


Products with clear lens has a different size.




Art. 360
Clear globe.
E27, 46W Halo max.
Black, 360B
White, 360W
EEI: A+..D




Art. 361
Opal globe.
E27, 46W Halo max.
Black, 361B
White, 361W
EEI: A+..D




Art. 310
Clear globe.
E27, 46W Halo max.
Black, 310B
White, 310W
EEI: A+..D



Art. 311
Opal globe.
E27, 46W Halo max.
Black, 311B
White, 311W
EEI: A+..D



Art. 312
Clear globe.
E27, 46W Halo max.
Black, 312B
White, 312W
EEI: A+..D



Art. 313
Opal globe.
E27, 46W Halo max.
Black, 313B
White, 313W
EEI: A+..D

Accessories
Art. 152
Corner bracket for Art. 360, 361, 310 and 311
Black, 152B
White, 152W

Art. 307
Concreting anchor for Art. 312 and 313.

Art. 312, 313 has a square feet 16,5 cm.
Distance between the two bolt holes is 9 cm.



BOLOGNA



















Art. 314
Clear globe.
E27, 46W Halo max.
Black, 314B
White, 314W
EEI: A+..D




Art. 315
Opal globe.
E27, 46W Halo max.
Black, 315B
White, 315W
EEI: A+..D




Art. 362
Clear globe.
E27, 2x46W Halo max.
Black, 362B
White, 362W
EEI: A+..D



Art. 363
Opal globe.
E27, 2x46W Halo max.
Black, 363B
White, 363W
EEI: A+..D



Art. 364
Clear globe.
E27, 3x46W Halo max.
Black, 364B
White, 364W
EEI: A+..D



Art. 365
Opal globe.
E27, 3x46W Halo max.
Black, 365B
White, 365W
EEI: A+..D

Art. 307
Concreting anchor for Art. 314 and 315.

Art. 314 and 315 has a square feet 16,5 cm.
Distance between the two bolt holes is 9 cm.

Accessories
Art. 305, Concreting anchor for Art. 362, 363, 364 and 365.

Art. 306, Anchoring support for Art. 362, 363, 364 and 365.


Art. 362, 363, 364 and 365 Hexagonal foot. 3 holes for anchoring.
Distance between holes: 20,5 cm. (three bolts).



COMO


E27

All Como range.
IP54, class II.
Supplied with
polycarbonate lens
Opal polycarbonate on request.




Art. 370
E27, 57W Halo. max.
Black, 370B
White, 370W
EEI: A+..D

Accessories
Art. 152
Corner bracket for
Art. 370.
Black, 152B
White, 152W




Art. 375
E27, 57W Halo. max.
Black, 375B
White, 375W
EEI: A+..D

Accessories
Art. 307
Concreting anchor
for Art. 375




Art. 371
E27, 57W Halo. max.
Black, 371B
White, 371W
EEI: A+..D

Accessories
Art. 305
Concreting anchor for
Art. 371
Art. 306
Anchoring support for
Art. 371



Art. 372
E27, 2x57W Halo. max.
Black, 372B
White, 372W
EEI: A+..D

Accessories
Art. 305
Concreting anchor for
Art. 372
Art. 306
Anchoring support for
Art. 372



Art. 373
E27, 3x57W Halo. max.
Black, 373B
White, 373W
EEI: A+..D

Accessories
Art. 305
Concreting anchor for
Art. 373
Art. 306
Anchoring support for
Art. 373

Art. 371, 372 og 373: *Hexagonal foot. Distancebetween the three holes is 20,5 cm.*
Art. 375: *Square base- 16,5 cm.Distance between the two holes 9 cm.*














FIRENZE



E27



All Firenze range.
IP54, class II.
Supplied with polycarbonate lens
Opal polycarbonate on request.




Art. 800A
E27, 57W Halo. max.
Black, 800A/B
White, 800A/W
EEI: A+..D




Art. 800
E27, 57W Halo. max.
Black, 800B
White, 800W
EEI: A+..D

Accessories
Art. 152
Corner bracket for Art. 800
Black, 152B
White, 152W




Art. 805
E27, 57W Halo. max.
Black, 805B
White, 805W
EEI: A+..D


Accessories
Art. 307
Concreting anchor for Art. 805



Art. 810
E27, 57W Halo. max.
Black, 810B
White, 810W
EEI: A+..D



Art. 820
E27, 2x57W Halo. max.
Black, 820B
White, 820W
EEI: A+..D



Art. 830
E27, 3x57W Halo. max.
Black, 830B
White, 830W
EEI: A+..D

Accessories
Art. 305
Concreting anchor for Art. 810, 820 and 830
Art. 306
Anchoring support for Art. 810, 820 and 830

Art. 810, 811, 820: *Hexagonal foot. Distancebetween the three holes is 20,5 cm.*
Art. 805: *Square base- 16,5 cm.Distance between the two holes 9 cm.*





R I M I N I / M I L A N O






E27

Concerns Rimini/ Milano range.
Glass: clear polycarbonate lens.
Class II, IP 54.

Rimini range contains of art.
259, 2591, 250, 402, 403 and 404.


Milano range contains of art. 401



Art. 259
E27, 46W Halo max.
Black, 259B
White, 259W
EEI: A+..D

Accessories
Art. 150
Corner bracket for Art. 259 and 2591


Black, 150B
White, 150W



Art. 2591
E27, 46W Halo max.
Black, 2591B
White, 2591W
EEI: A+..D

Accessories
Art. 150
Corner bracket for Art. 259 and 2591

Black, 150B
White, 150W



Art. 250
E27, 46W Halo max.
Black, 250B
White, 250W
EEI: A+..D


Accessories
Art. 307
Concreting anchor for Art. 250 and 404.

R I M I N I /
M I L A N O



E27






Rimini/ Milano range.
Glass: clear polycarbonate lens.
Class II, IP 54.

Rimini range contains of art. 259, 2591, 250, 402, 403 og 404.

Milano range contains of art. 401




Art. 404
E27, 46W Halo max.
Black, 404B
White, 404W
EEI: A+..D

Accessories
Art. 307
Concreting anchor for Art. 250 and 404.


Art. 401
E27, 77W Halo max.
Black, 401B
White, 401W
EEI: A+..D

Accessories
Art. 405
Concreting anchor for Art.401
Art. 406
Anchoring support for Art. 401



Art. 402
E27, 2x46W Halo max.
Black, 402B
White, 402W
EEI: A+..D

Accessories
Art. 405
Concreting anchor for Art.402
Art. 406
Anchoring support for Art. 402




Art. 403
E27, 3x46W Halo max.
Black, 403B
White, 403W
EEI: A+..D


Accessories
Art. 405
Concreting anchor for Art.403
Art. 406
Anchoring support for Art. 403

Milano/ Rimini art. 401, 402 and 403: Has hexagonal foot. Distance between bolt holes is 17,5 cm (three bolts).
Art. 404: has a square feet. Distance between the two bolt holes is 9 cm.


ACCESSORIES FOR NORLYS LAMPS




Art. 150
Corner
bracket
Rimini




Art. 152
Corner
bracket
Chelsea
Bologna
London
Modena
Como
Firenze




Art. 153
Corner bracket
Stockholm
Oslo
Lund
Larvik
Bergen
Karlstad
Vansbro




Art. 154
Arm for
Visby
Nice




Art. 156
Corner bracket
Helsinki
(Only 880, 882,
883)




Art. 158
Corner bracket
Helsinki
Koster




Art. 205
Concreting anchor
Halmstad bollard
Stockholm bollard
Alta Bollard
Scandinavian wood
Egersund Mini
Oppland
Lillesand




Art. 206
Anchoring support
Halmstad bollard
Stockholm bollard
Alta Bollard
Scandinavian wood
Egersund Mini
Oppland
Lillesand




Art. 307
Concreting
anchor
Chelsea
Bologna
London
Modena
Como
Firenze




Art. 305
Concreting
anchor
Chelsea
Bologna
London
Modena
Como
Firenze




Art. 306
Anchoring support
Chelsea
Bologna
London
Modena
Como
Firenze




Art. 505
Concreting
anchor
Narvik




Art. 405
Concreting anchor
Stockholm
Oslo
Lund
Rimini/Milano
Koster
Helsinki




Art. 406
Anchoring support
Stockholm
Oslo
Lund
Rimini/Milano
Koster
Helsinki




Art. 1128
Concreting anchor
Oslo 245
Arvika 890-897
Stockholm 285, 287




Art. 1230
Concreting anchor
Stavanger
Egersund




Art. 1231
Anchoring support
Stavanger
Egersund




Art. 1906
Reinforced galvanized
metal foot for Molde



Art. 1907
Concreting anchor
Molde
Asker bollard




Art. 1908
Anchoring support
Molde
Asker bollard




Art. 112
Concreting anchor
Namsos




Art. 113
Anchoring support
Namsos



Art. 116
Concreting anchor
Asker pole




Art. 117
Anchoring support
Asker pole

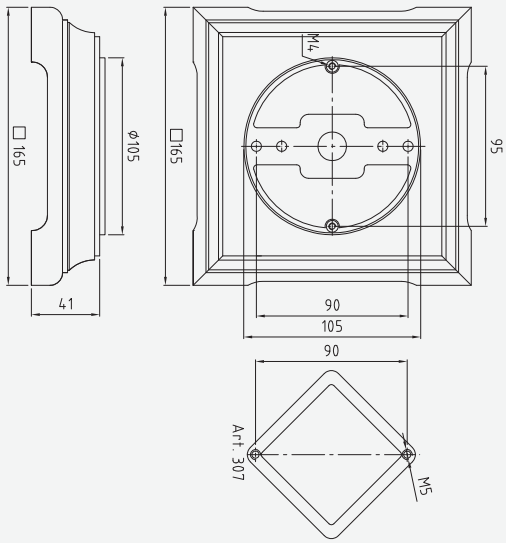

Dimensions of base art.

Bologna	312
Bologna	313
Bologna	314
Bologna	315
Chelsea	956
Chelsea	957
Como	375
Firenze	805
London	484
London	485
Modena	300
Modena	304


(165mm)

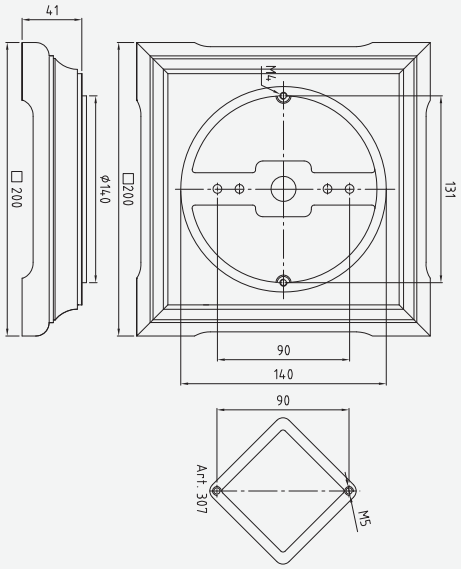

Dimensions of base art.


London	494
Modena	384

(200mm)

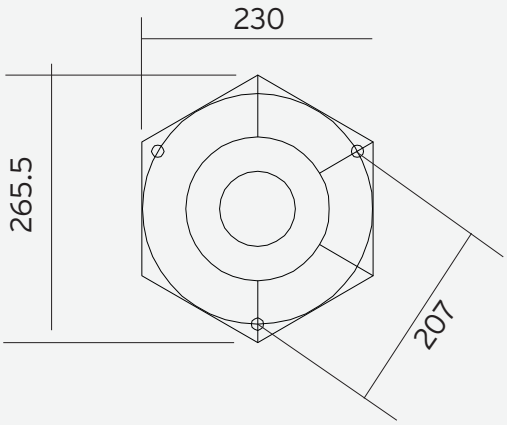

Dimensions of base art.

Bologna	362
Bologna	363
Bologna	364
Bologna	365
Chelsea	951
Chelsea	953
Como	371
Como	372
Como	373
Firenze	810
Firenze	820
Firenze	830
London	482
London	483
London	491
London	492
Mondena	301
Mondena	302
Mondena	303
Mondena	382

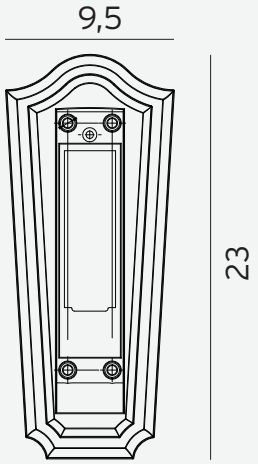

Dimensions of wall bracket

Bologna	310
Bologna	311
Bologna	360
Bologna	361
Chelsea	954
Chelsea	960
Como	370
Firenze	800
London	480
London	481
London	490
London	493
Modena	350
Modena	351
Modena	380
Modena	381

No pictures contained in this catalogue can be reproduced, even partially. The Company reserves the right to change technical and aesthetical characteristics of illustrated products at any times, in order to increase constantly their quality and performance without written notice.



Norlys AS
P.B 1014 Hoff, 0218 Oslo
Hovfaret 4B, 0275 Oslo
Norway
Tel. +47 24 12 40 10
Fax. +47 24 12 40 11
www.norlys.com
E-mail: firmapost@norlys.no

Foto: Studio Rugleseth