NORLYS

Lighting the World since 1953



2022








OUTDOOR LIGHTING FOR TOUGH CLIMATE CONDITIONS

NORLYS is a Scandinavian company with a 50 years history in the professional lighting business. We offer one of the largest product ranges in decorative outdoor lighting and we deliver highest quality all over the world.

No secret: Our quality comes from the choice of excellent raw-material in combination with a perfectly controlled production process.

All our products are made in Europe n our own ISO 9001, IATF 16949 and ISO 14001 certified factory. Our manufacturing facility is over 15000m^2 and we use the l^{a}test technolgy across all aspects of production¨ Steady investment keeps us on the top of the industrial process. A good example is our foundry, one of the most modern installations in Europe.

When we cannot do it alone, we carefully choose our partners. This is especially important in the field of LED technology. We use the best LED quality from the very best suppliers.
No compromise allowed!

Good design, large choice, excellent quality: indeed that's what our customers appreciate! In this world of quick exchange. it is equally important to work on high delivery-speed. This is why we have several very large warehouses with thousands of finished products ready to be shipped. If something is not already in stock, we aim to produce within days.

INDEX

WALL


ARENDAL p.43


ASKER p.9


ASKER BIG p.10


BASEL p.25


BERGEN p.41


BERLIN p.34


BERN p.25


BODEN p.27


BOLOGNA p.52


BORNHOLM p.35


BREMEN p.34


CHELSEA p.55


CHELSEA p.55


COMO p.52


FIRENZE p.53


GENEVA p.21


GENOVA p.56


GENOVA MINI p.56


GLASGOW p.57


HALDEN p.31


HITRA p.21


KARLSTAD p.40


KOSTER p.45


LARVIK p.38


LILLEHAMMER p.17


LOFOTEN p.47


LOFOTEN p.47


LONDON p.57


LONDON p.49


LUND p.39

NEW


LYSFJORD p.19


MANDAL p.15


MODENA p.51


NAMSOS p.59


NORDLAND p.23


OSLO p.38


PARIS p.33


PARIS BIG p.33


RIMINI p.53


RONDANE p.35

SANDVIK p.13

SKI p.29

INDEX

WALL


STOCKHOLM p.36


STOCKHOLM p.37


VANSBRO p.41


VASA p.31


VOSS p.18

BOLLARD


ALTA p.93


ALTA p.95


ARENDAL p.101


ARVIKA p.89


ASKER p.85


BOLOGNA p.128


NEW
BORG p.91


CHELSEA p.127


COMO p.124


EGERSUND p.78


EGERSUND MINI p.79


NEW
EGERSUND MINI p.94


FIRENZE p.125


HALMSTAD p.97


HALMSTAD p.95


NEW
HELLVIK p.90


NEW
KISA p.81


LILLESAND p.83


NEW
LILLESAND p.94


LOFOTEN p.119


LOFOTEN p.119


LONDON p.120


MODENA p.122


MOLDE p.87


NAMSOS p.88


NARVIK p.77


OPPLAND p.81


NEW
OPPLAND p.94


OSLO p.117


RIMINI p.126


STAVANGER p.75


STOCKHOLM p.114


STOCKHOLM p.98


STOCKHOLM p.95

INDEX

POLE


ASKER p.110


BOLOGNA p.128


BORG p.105


CHELSEA p.127


COMO p.124


EGERSUND PARK p.109


FIRENZE p.125


HAMMERFEST p.107


NEW
KARLSTAD p.117


NEW
KISA p.111


KOSTER p.113


LOFOTEN p.119


LONDON p.121


LUND p.116


MODENA p.123


NICE p.103


OSLO p.117



RIMINI / MILANO p.126


STOCKHOLM p.115


VISBY p.102

RECESSED / SPOT


GRIMSTAD p.60


NEW
MOSS p.65


NEW
MOSS p.65


NEW
MOSS p.65


NEW
MOSS p.66


NEW
MOSS p.66


NEW
MOSS p.66


NEW
MOSS p.67


NEW
MOSS p.67


NAMSOS p.61


NAMSOS p.61


NAMSOS MINI p.59


RENA p.63


RENA p.63


RENA COVER p.62


RENA COVER p.62


SANDE p.64


SANDE p.64

INDEX

CEILING


BERGEN p.70


BORNHOLM p.35


CHELSEA p.73


KARLSTAD p.71


LATINA p.70


LOFOTEN p.72


LOFOTEN p.72


LOFOTEN p.72


LONDON p.73

NEW


NIDAROS p.68


NORDLAND p.23


OSLO p.71


RONDANE p.35


SANDVIK p.69

ACCESSORIES


POLES
p.129


CONCRETING ANCHORS
p.130 / 131


ANCHORING SUPPORTS
p.130 / 131


CORNER BRACKETS
p.130 / 131


ADAPTERS
p.130 / 131


ELECTRICAL
p.130 / 131







ASKER




ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 65 IK 08 DALI DIM

ASKER Aluminium powder coated wall light. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control	
1510	8,8W	LED	312 lm	3000K	50 000h	Up & Down	Dim. Triac	
5102*	8W	LED	387 lm	4000K	50 000h	Up & Down	Dim. Triac	
1513	-	E27	-	-	-	Up & Down	-	
1720	8,4W	LED	798 lm	3000K	70 000h	Up & Down	Dim. Triac	PRO
5150*	8,3W	LED	764 lm	4000K	70 000h	Up & Down	Dim. Triac	PRO
1721	9,9W	LED	787 lm	3000K	70 000h	Up & Down	DALI	PRO
1511	8W	LED	156 lm	3000K	50 000h	Down	Dim. Triac	
5103*	8W	LED	193 lm	4000K	50 000h	Down	Dim. Triac	
1514	-	E27	-	-	-	Down	-	
1726	5,4W	LED	429 lm	3000K	70 000h	Down	Dim. Triac	PRO
5151*	5,4W	LED	444 lm	4000K	70 000h	Down	Dim. Triac	PRO
1727	5,5W	LED	429 lm	3000K	70 000h	Down	DALI	PRO
5157*	5,5W	LED	448 lm	4000K	70 000h	Down	Dim. Triac	PRO

*2700/4000K available by request, contact your supplier.





Art. 1510
Art. 5102*
Art. 1513
Art. 1720
Art. 5150*
Art. 1721




Art. 1511
Art. 5103*
Art. 1514
Art. 1726
Art. 5151*
Art. 1727
Art. 5157*



ASKER BIG Aluminium powder coated wall light. Supplied with transparent polycarbonate diffuser with structure.

Art.	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
1300	8,3W	LED	547 lm	3000K	70 000h	Up & Down	Dim. Triac
5018*	8,3W	LED	550 lm	4000K	70 000h	Up & Down	Dim. Triac
1303	-	E27	-	-	-	Up & Down	-
1306	13,7W	LED	1280 lm	3000K	70 000h	Up & Down	Dim. Triac
5105*	13,7W	LED	1321 lm	4000K	70 000h	Up & Down	Dim. Triac.
1302	5,2W	LED	306 lm	3000K	70 000h	Down	Dim. Triac
5104*	5,2W	LED	362 lm	4000K	70 000h	Down	Dim. Triac
1305	-	E27	-	-	-	Down	-
1308	8,4W	LED	732 lm	3000K	70 000h	Down	Dim. Triac

2700/4000K available by request, contact your supplier.





Art. 1300
Art. 1303
Art. 1306
Art. 5018*
Art. 5105*



Art. 1302
Art. 1305
Art. 1308
Art. 5104*

ASKER BIG



ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 65 IK 08 DIM

ASKER (GALVANIZED)







GALVANIZED CE 220-240V 50-60Hz IP 44 IK 08 DIM

ASKER (GALVANIZED) Front in galvanized steel and wallplate in aluminium. Tansparent polycarbonate diffuser with structure.

Art.	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
1700	8W	LED	398 lm	3000K	50 000h	Up & Down	Dim. Triac
1702	-	E27	-	-	-	Up & Down	-
1705	8W	LED	165 lm	3000K	50 000h	Down	Dim. Triac






Art. 1700
Art. 1702


Art. 1705
Art. 1707

ASKER (GALVANIZED - Big) Front in galvanized steel and wallplate in aluminium. Transparent polycarbonate diffuser with structure.

Art.	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
1710	7,1W	LED	649 lm	3000K	70 000h	Up & Down	Dim. Triac
1712	-	E27	-	-	-	Up & Down	-
1715	5,3W	LED	347 lm	3000K	70 000h	Down	Dim. Triac

2700/4000K available by request, contact your supplier.





Art. 1710
Art. 1712

Art. 1715
Art. 1717







SANDVIK




NEW



ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 65 IK 08 DIM

SANDVIK Aluminium powder coated up & down wall light. Tempered clear glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
1730	2x max 4W	2x LED GU10	-	-	-	Up & Down	-
1731	2x3,9W	2x LED GU10	420 lm	2700K	40 000h	Up & Down	Dim. Triac
1732*	2x8W	LED	1126 lm	3000K	50 000h	Up & Down	Dim. Triac




Art. 1730
Art. 1731
Art. 1732



SANDVIK Aluminium powder coated down wall light. Tempered clear glass.

Art	Watt	Type of light ource	Luminous flux	Colour temperature	L70B50	Version	Light control
1740	max 4W	LED GU10	-	-	-	Down	-
1741	3,9W	LED GU10	210 lm	2700K	40 000h	Down	Dim. Triac
1742*	8W	LED	563 lm	3000K	50 000h	Down	Dim. Triac



Art. 1740
Art. 1741
Art. 1742



Accessories Sandvik		
148	Cornerbracket	p. 131

Art. 1731: 2x3,9W LED GU10 included, 2x265lm, 2700K, 40000h, 25D, dimmable. art. 1741: 3,9W LED GU10 included, 265lm, 2700K, 40000h, 25D, dimmable.art. 1732 Light distribution 36D.
*2700/4000K available by request, contact your supplier.







MANDAL






GALVANIZED BLACK CE 220-240V 50-60Hz IP 44 IK 08 DIM

MANDAL Galvanized steel or powder coated galvanized steel. Tempered clear glass.							
Art	**Watt**	**Type of light source**	**Luminous flux**	**Colour temperature**	**L70B50**	**Version**	**Light control**
1370	2x3,9W	2x GU10	500 lm	2700K	40 000h	Up & Down	Dim. Triac
1371	2x max 4W	2x GU10	-	-	-	Up & Down	-
1373	3,9W	LED GU10	250 lm	2700K	40 000h	Down	Dim. Triac
1374	max 4W	LED GU10	-	-	-	Down	-


Accessories Mandal			
130	Corner bracket	Art.1373, 1374	p. 131
149	Corner bracket	Art.1370, 1371	p. 131

Art. 1370: 2x3,9W LED GU10 included, 2x265lm, 2700K, 40000h, 25D, dimmable. art. 1373: 3,9W LED GU10 included, 265lm, 2700K, 40000h, 25D, dimmable.



Art. 1370, 1371





Art. 1373, 1374














LILLEHAMMER


ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 65 DIM

LILLEHAMMER Aluminium powder coated wall light. Clear glass. Art. 1580, 5027 can be turned both ways.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Light control
1580	7,1W	LED	129 lm	3000K	50 000h	Dim. Triac
5027*	7,6W	LED	127 lm	4000K	50 000h	Dim. Triac
1581	7,1W	LED	205 lm	3000K	50 000h	Dim. Triac
5028*	7,7W	LED	210 lm	4000K	50 000h	Dim. Triac
1582	4,2W	LED	103 lm	3000K	50 000h	Dim. Triac
5029*	4,2W	LED	111 lm	4000K	50 000h	Dim. Triac
1583	7,1W	LED	34 lm	3000K	50 000h	Dim. Triac
5030*	7,1W	LED	32 lm	4000K	50 000h	Dim. Triac
1584	4,2W	LED	17 lm	3000K	50 000h	Dim. Triac
5031*	4,2W	LED	16 lm	4000K	50 000h	Dim. Triac
1585	4,2W	LED	17 lm	3000K	50 000h	Dim. Triac
1586*	4,2 W	LED	16 lm	4000K	50 000h	Dim. Triac

*2700/4000K available by request, contact your supplier.





Art. 1580, 5027*



Art. 1581 Art. 5028* | Art. 1582 Art. 5029* | Art. 1583 Art. 5030* | Art. 1584 Art. 5031* | Art. 1585 Art. 1586








VOSS


ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 54

VOSS Aluminium powder coated wall light. Clear glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50
1950	16,9W	LED	614 lm	3000K	50 000h
1951	11,8W	LED	558 lm	3000K	50 000h
1952	22,2W	LED	1116 lm	3000K	50 000h
1953	6,4W	LED	55,7 lm	3000K	50 000h
1954	6,4W	LED	55,7 lm	3000K	50 000h
1955	11,8W	LED	558 lm	3000K	50 000h

2700/4000K available by request, contact your supplier.





LYSFJORD

NEW







ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DALI2

LYSFJORD Aluminium powder coated wall light. Clear glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
6401	26,5W	LED	946 lm	3000K	>70 000h	DALI2
6402	26,5W	LED	946 lm	3000K	>70 000h	DALI2
6403	26,5W	LED	1813 lm	3000K	>70 000h	DALI2
6404	26,5W	LED	78 lm	3000K	>70 000h	DALI2

2700/4000K available by request, contact your supplier.







HITRA





ALUMINIUM GRAPHITE WHITE CE 220-240V 50-60Hz IP 65

GENEVA







ALUMINIUM GRAPHITE WHITE CE 220-240V 50-60Hz IP 54 IK 08


HITRA Aluminium powder coated down wall light, supplied with tempered clear glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
1330	9,5W	LED	920 lm	3000K	50 000h	Down	On/off
5114*	9,5W	LED	979 lm	4000K	50 000h	Down	On/off
1331	17,5W	LED	1599 lm	3000K	50 000h	Down	On/off

Accessories Art. 1330, 1330

151	Corner bracket	p.131

*2700/4000K available by request, contact your supplier.




Art. 1330
Art. 1331
Art. 5114*

GENEVA Aluminium powder coated up and down wall light, supplied with satin polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
874	-	E27	-	-	-	Up & Down	-
879	8W	LED	350 lm	3000K	50 000h	Up & Down	Dim. Triac
5108*	8W	LED	352 lm	4000K	50 000h	Up & Down	Dim. Triac

*2700/4000K or DALI available by request, contact your supplier.



Art. 874
Art. 879
Art. 5108*







NORDLAND






ALUMINIUM GRAPHITE WHITE CE 220-240V 50-60Hz IP 65 IK 10 DIM

NORDLAND Powder coated aluminium wall light supplied with opal PC diffuser. Suitable for wall and ceiling mounting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Light control	Sensor HF
718	10W	LED	598 lm	3000K	50 000h	Dim. Triac	-
5016*	10W	LED	672 lm	4000K	50 000h	Dim. Triac	-
5041	17,5W	LED	1249 lm	3000K	50 000h	On/off	-
5017*	17,5W	LED	1358 lm	4000K	50 000h	On/off	-
5043	17,5W	LED	1318 lm	3000K	50 000h	On/off	Yes
7120	2x max9W	2x LED E27	-	-	-	-	-

* 2700/4000K available by request, contact your supplier.





BASEL



STAINLESS STEEL | GALVANIZED | BLACK | CE | 220-240V 50-60Hz | IP 54 | IK 07 | DIM


BERN



STAINLESS STEEL | GALVANIZED | BLACK | CE | 220-240V 50-60Hz | IP 54 | IK 07 | DIM

BASEL Wallplate in aluminium. Front in galvanized steel, stainless steel or galvanized and powder coated. Heavy clear or frosted glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Diffuser	Light control	Sensor HF
660	-	E27	-	-	-	Clear	-	-
661	-	E27	-	-	-	Frosted	-	-
661MD	Max LED 9W	E27	-	-	-	Frosted	-	Yes
668	5,2W	LED	483 lm	3000K	>70 000h	Frosted	Dim. Triac	-
671	10W	LED	782 lm	3000K	50 000h	Frosted	-	Yes
681	4,5W	LED	231 lm	3000K	50 000h	Frosted	Dim. Triac	-




Art. 660
Art. 661
Art. 661MD
Art. 681

BERN Wallplate in aluminium. Front in galvanized steel, stainless steel or galvanized and powder coated. Heavy clear or frosted glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Diffuser	Light control	Sensor HF
650	-	E27	-	-	-	Clear	-	-
651	-	E27	-	-	-	Frosted	-	-
655	5,2W	LED	487 lm	3000K	>70 000h	Frosted	Dim. Triac	-
657	4,5W	LED	231 lm	3000K	50 000h	Frosted	Dim. Triac	-
675	11,2W	LED	800 lm	3000K	50 000h	Frosted	-	Yes

2700/4000K available by request, contact your supplier.



Art. 650
Art. 651
Art. 657


14B





BODEN






GALVANIZED BLACK CE 220-240V 50-60Hz IP 54 DIM

BODEN Wallplate in aluminium. Front in galvanized steel or powder coated aluminium. Clear or opal polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Diffuser PC	Light control
860	-	E27	-	-	-	Opal	-
862	-	E27	-	-	-	Clear	-
866	8W	LED	451 lm	3000K	50 000h	Opal	Dim. Triac

2700/4000K available by request, contact your supplier.









SKI






GALVANIZED BLACK CE 220-240V 50-60Hz IP 44 IK 09 DIM


SKI Galvanized steel or galvanized and powder coated wall light. Tansparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Connectors
1390	5,2W	LED	350 lm	3000K	70 000h	Dim. Triac	F (Schuko) 2x230V
1392	5,2W	LED	346 lm	3000K	70 000h	Dim. Triac	-
5113	5,2W	LED	432 lm	4000K	70 000h	Dim. Triac	-

2700/4000K available by request, contact your supplier.



Art. 1390



Art. 1392, 5113



Photo: Swefaror JW

HALDEN





ALUMINIUM GRAPHITE WHITE CE 220-240V 50-60Hz IP 65 IK 10 DIM DALI

VASA






ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 65 IK 08 DIM DALI

HALDEN Aluminium powder coated wall light. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Version	Light control
510	-	E27	-	-	-	Down	-
515	8,5W	LED E27	175 lm	2700K	25 000h	Down	Dim. Triac
517	8,5W	LED	682 lm	3000K	50 000h	Down	Dim. Triac
5020*	8,5W	LED	662 lm	4000K	50 000h	Down	Dim. Triac
5097*	8,8W	LED	696 lm	4000K	50 000h	Down	DALI




Art. 510
Art. 515
Art. 517
Art. 5020*
Art. 5097*



VASA Aluminium powder coated up & down wall light. Transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Version	Light control
120	-	E27	-	-	-	Up & Down	-
127	8,5W	LED E27	384 lm	2700K	25 000h	Up & Down	Dim. Triac
128	8,5W	LED	581 lm	3000K	70 000h	Up & Down	Dim. Triac
5019*	8,5W	LED	668 lm	4000K	70 000h	Up & Down	Dim. Triac
5093	10,2W	LED	-	3000K	70 000h	Up & Down	DALI



Art. 120
Art. 127
Art. 128
Art. 5019*
Art. 5093



ARt. 127/515: 8,5W LED E-27 bulb included, 806lm, 2700K, 25000h dimmable.
*2700/4000K available by request, contact your supplier.








PARIS





GALVANIZED BLACK WHITE COPPER CE 220-240V 50-60Hz IP 43 DIM


PARIS Galvanized steel or galvanized and powder coated wall light. Supplied with satin polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Version	Light control
160	-	E27	-	-	-	Down	-
(Only Art. 160 can be made with copper)							
1495	5,2W	LED	430 lm	3000K	70 000h	Down	Dim. Triac
163	-	E27	-	-	-	Down	-
1496	5,2W	LED	417 lm	3000K	70 000h	Down	Dim. Triac

2700/4000K available by request, contact your supplier.
Copper: over time the copper will age naturally and acquire an antique brown patina.



Art. 160
Art. 1495



Art. 163
Art. 1496

BERLIN








BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | IK 10 | DIM

BREMEN








GALVANIZED | BLACK | CE | 220-240V 50-60Hz | IP 54 | IK 10 | DIM

BERLIN Aluminium powder coated wall light. Supplied with clear or opal polycarbonate diffuser options.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Diffuser	Light control
610	-	E27	-	-	-	Clear	-
611	-	E27	-	-	-	Opal	-
615	8,5W	LED E27	-	2700K		Opal	Dim. Triac
617	10W	LED	276 lm	3000K	50 000h	Opal	Dim. Triac



Art. 610
Art. 611
Art. 615
Art. 617

BREMEN Front cover is made of galvanized steel or painted steel and mounted on an aluminium backplate. Clear or opal polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Diffuser	Light control
630	-	E27	-	-	-	Clear	-
631	-	E27	-	-	-	Opal	-
637	10W	LED	276 lm	3000K	50 000h	Opal	Dim. Triac



Art. 630
Art. 631
Art. 637

Art. 615: 8,5W LED E-27 bulb included, 806lm, 2700K, 25000h dimmable.
2700/4000K available by request, contact your supplier.

RONDANE





ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 IK 09 DIM



BORNHOLM





ALUMINIUM GRAPHITE WHITE CE 220-240V 50-60Hz IP 65 IK 10 DIM




RONDANE Aluminium powder coated wall and ceiling light. Supplied with polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Sensor HF
537	10W	LED	431 lm	3000K	50 000h	Dim. Triac	-
538	9W max	E27 LED	-	-	-	-	-
539	17,5W	LED	732 lm	3000K	50 000h	On/off	-
548	10W	LED	431 lm	3000K	50 000h	On/off	Yes


BORNHOLM Aluminium powder coated wall and ceiling light. Supplied with polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Sensor HF
541	10W	LED	431 lm	3000K	50 000h	Dim. Triac	-
5121*	10W	LED	507 lm	4000K	50 000h	Dim. Triac	-
542	17,5W	LED	1039 lm	3000K	50 000h	On/off	-
5122*	17,5W	LED	1087 lm	4000K	50 000h	On/off	-
544	10W	LED	417 lm	3000K	50 000h	On/off	Yes

*2700/4000K or DALI available by request, contact your supplier.



Art. 537
Art. 538
Art. 539



Art. 541
Art. 542
Art. 5121*
Art. 5122*


STOCKHOLM Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
280	-	II	E27	Clear	-
286 (Big)	-	II	E27	Clear	-


Accessories art. 280 i 286

153	Corner bracket	p. 130
159	Spacer	p. 130

Opal diffuser available as an option



Art. 280



Art. 286

STOCKHOLM





GALVANIZED BLACK WHITE CE 220-240V 50-60Hz IP 54 DIM

STOCKHOLM






GALVANIZED BLACK CE 220-240V 50-60Hz IP 54 DIM

STOCKHOLM Aluminium backplate. Front in galvanized steel or galvanized steel and powder coated. Clear or opal polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Diffuser: PC	Light control
220	-	E27	-	-	-	Opal	-
226	-	E27	-	-	-	Clear	-
1600	8W	LED	332 lm	3000K	50 000h	Opal	Dim. Triac

2700/4000K available by request, contact your supplier.




Art. 220, 226, 1600

OSLO



GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 IK 07 E27

LARVIK

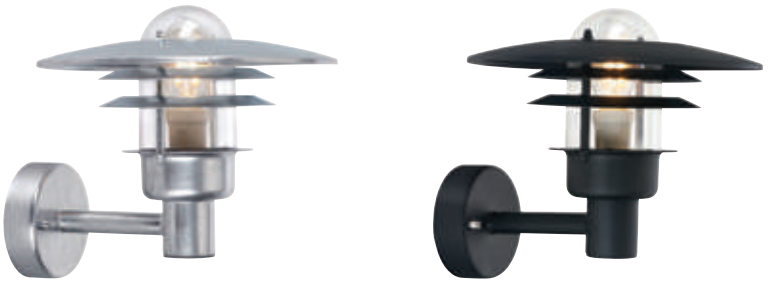


GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 IK 07 E27

OSLO Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
240	-	II	E27	Clear	-

Accessories Oslo Art. 240		
153	Corner bracket	p. 130
159	Spacer	p. 130
(Satin diffuser available as an option)		




Art. 240

LARVIK Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
690	-	II	E27	Clear	-

Accessories Larvik Art. 690		
153	Corner bracket	p. 130
159	Spacer	p. 130
(Satin diffuser available as an option)		



Art. 690



LUND






GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27

LUND Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
290	-	II	E27	Clear	-
(Opal Diffuser available as an option)					
Accessories Lund Art. 290					
153	Corner bracket			p. 130	
159	Spacer			p. 130	
(Satin diffuser available as an option)					



Art. 290











KARLSTAD

GALVANIZED BLACK WHITE COPPER CE 220-240V 50-60Hz IP 55 E27

KARLSTAD Galvanized steel, copper or powder coated steel wall light. Clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
230	-	II	E27	Clear	-

Accessories Karlstad Art. 230

153	Corner bracket	p. 130
159	Spacer	p. 130

(Satin diffuser available as an option)

Copper: over time the copper will age naturally and acquire an antique brown patina.



Art. 230


VANSBRO





GALVANIZED BLACK COPPER CE 220-240V 50-60Hz IP 55 E27

BERGEN

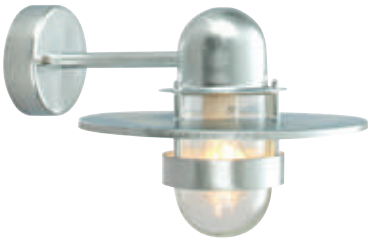




GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27

VANSBRO Galvanized steel, copper or powder coated steel wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
1920	-	II	E27	Clear	-

Accessories Vansbro Art. 1920		
153	Corner bracket	p. 130
159	Spacer	p. 130

(Satin diffuser available as an option)



Art. 1920


BERGEN Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
270	-	II	E27	Clear	-

Accessories Bergen Art. 270		
153	Corner bracket	p. 130
159	Spacer	p. 130

(Satin diffuser available as an option.)

Copper: over time the copper will age naturally and acquire an antique brown patina.



Art. 270



ARENDAL




BLACK GRAPHITE CE 220-240V 50-60Hz IP 65 IK 08

ARENDAL Aluminium powder coated wall light. Supplied with tempered glass, frosted inside.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
1250	-	E14	-	-	-	-
1251	4W	LED	330 lm	3000K	50 000h	On/off

*2700/4000K available by request, contact your supplier.



Art. 1250
Art. 1251



KOSTER






ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IK 10 DALI2

KOSTER Aluminium powder coated wall light. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Ulor %	Light control	Lens	
724	-	E27	-	-	-	0%	On/off	-	
725	11,3W	LED	857 lm	3000K	50 000h	0%	On/off	-	
1912	17,5W	LED	1568 lm	3000K	50 000h	0%	On/off	-	
5004*	17,5W	LED	1625 lm	4000K	50 000h	0%	On/off	-	
1810	14,4W	LED	1975 lm	3000K	>120 000h	0%	On/off	IESNA Version III	PRO
1814	14,4W	LED	1991 lm	3000K	>120 000h	0%	On/off	IESNA Version V	PRO
1830*	14,4W	LED	2045 lm	4000K	>120 000h	0%	On/off	IESNA Version III	PRO
1834*	14,4W	LED	2031 lm	4000K	>120 000h	0%	On/off	IESNA Version V	PRO
1818	19,4W	LED	2700 lm	3000K	>120 000h	0%	DALI2	IESNA Version III	PRO
1822	19,6W	LED	2747 lm	3000K	>120 000h	0%	DALI2	IESNA Version V	PRO
1838*	19,4W	LED	2732 lm	4000K	>120 000h	0%	DALI2	IESNA Version III	PRO
1842*	19,4W	LED	2718 lm	4000K	>120 000h	0%	DALI2	IESNA Version V	PRO



Accesories Koster

158	Corner bracket	p. 130

* 2700/4000K available by request, contact your supplier.







LOFOTEN






BLACK | CE | 220-240V 50-60Hz | IP 44 | E27


LOFOTEN Classic powder coated steel (electrogalvanized)wall fixtures with clear or opal glass.

Art	Watt	Class	Type of light source	Light control	Version oprawy:	Glass:
1940	-	II	E27	-	Wall	Clear
1960	-	II	E27	-	Wall	Opal
1943	-	II	E27	-	Wall arm	Clear
1963	-	II	E27	-	Wall arm	Opal


Accessories for Lofoten				
155	Corner bracket	p. 130	Art. 1943, 1963	



Art. 1940
Art. 1960



Art. 1943, Art. 1963







LONDON









BLACK WHITE CE 220-240V 50-60Hz IP 54 E27 DALI2


LONDON Aluminium powder coated wall lights. Supplied with transparent polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Diffuser	Version
480	-	E27	-	-	-	-	-	Up
481	-	E27	-	-	-	-	-	Down
490	-	E27	-	-	-	-	-	Up
4116	9,5W	LED	757 lm	3000K	50 000h	On/off	-	Up
4118	19,4W	LED	2000 lm	3000K	>120 000h	DALI2	IESNA Type VS	Up
493	-	E27	-	-	-	-		Down
4136	9,5W	LED	757 lm	3000K	50 000h	On/off	-	Down
4138	19,4W	LED	2000 lm	3000K	>120 000h	DALI2	IESNA Type VS	Down


ACCESSORIES LONDON

152	Corner bracket	p.130

London LED with 2700/4000K available by request, contact your supplier.




Art. 480




Art. 481

PRO



Art. 490, 4116, 4118

PRO



Art. 493, 4136, 4138







MODENA






BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

MODENA Aluminium powder coated wall lights.Tansparent polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
350	-	II	E27	Clear	-
351	-	II	E27	Clear	-
380	-	II	E27	Clear	-
381	-	II	E27	Clear	-

Accessories for Modena Art. 350, 351, 380 i 381


152	Corner bracket	p. 130




Art. 350



Art. 351



Art. 380



Art. 381

BOLOGNA





BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

COMO





BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

BOLOGNA Aluminium powder coated wall lights. Clear or opal PMMA globe.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
360	-	II	E27	Clear	-
361	-	II	E27	Opal	-
310	-	II	E27	Clear	-
311	-	II	E27	Opal	-

COMO Aluminium powder coated wall light. Transparent polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
370	-	II	E27	Clear	-
(Opal diffuser available as an option).					

Accessories for Bologna Art. 310, 311, 360, 361 & Como Art. 370


152	Corner bracket	p. 130



Art. 360, 361



Art. 310, 311



Art. 370

RIMINI





BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

FIRENZE




BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

RIMINI Aluminium powder coated wall lights. Transparent polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
259	-	II	E27	Clear	-
2591	-	II	E27	Clear	-

Accessories for Rimini Art. 259, 2591

150	Corner bracket	p. 130



Art. 259




Art. 2591

FIRENZE Aluminium powder coated wall light. Transparent polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
800	-	II	E27	Clear	-
(Opal diffuser available as an option).					

Acccessories for Firenze Art. 800

152	Corner bracket	p. 130



Art. 800







CHELSEA






COPPER | CE | 220-240V 50-60Hz | IP 44 | E27


CHELSEA Handmade of copper and supplied with clear polycarbonate diffuser.

Art	Watt	Type of light source	Diffuser: PC	Light control
950	-	E27	Clear	-
962	-	E27	Clear	-
963	-	E27	Clear	-
954	-	E27	Clear	-
955 (Big)	-	E27	Clear	-
960	-	E27	Clear	-
964 (Big)	-	E27	Clear	-


ACCESSORIES Chelsea

152	Corner bracket	p. 130	for Art. 954, 960


Copper fittings are supplied in a raw finish to alow natural patina over time.




Art. 950




Art. 963




Art. 962




Art. 954



Art. 955



Art. 960



Art. 964

GENOVA





BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

GENOVA MINI






BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

GENOVA Aluminium powder coated wall light. Transparent polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
170	-	II	E27	Clear	-



Art. 170

GENOVA MINI Aluminium powder coated wall light. Transparent polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
175	-	II	E27	Clear	-



Art. 175

GLASGOW





BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27

LONDON






BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27

GLASGOW Aluminium powder coated wall light.Transparent polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
730	-	II	E27	Clear	-



Art. 730

LONDON Aluminium powder coated wall light. Transparent polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
497	-	II	E27	Clear	-



Art. 497



NAMSOS





ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 IK 09 DIM

NAMSOS MINI





ALUMINIUM GRAPHITE CE 28 220-240V 50-60Hz IP 65 IK 10 DIM




NAMSOS Aluminium powder coated wall light. Supplied with tempered clear glass.						
Art	**Watt**	**Type of light source**	**Luminous flux**	**Colour temperature**	**L70/B50**	**Light control**
1341	4W	LED	123 lm	3000K	>50 000h	Dim. Triac
5156*	4W	LED	162 lm	4000K	>50 000h	Dim. Triac


Accessories for Namsos Art. 1314, 5156	
157	Spacer

NAMSOS MINI Recessed aluminium powder coated wall light. Supplied with tempered clear glass.						
Art	**Watt**	**Type of light source**	**Luminous flux**	**Colour temperature**	**L70/B50**	**Light control**
1340	4W	LED	59 lm	3000K	>50 000h	Dim. Triac
5111*	4W	LED	63 lm	4000K	>50 000h	Dim. Triac


Included recessing box.
*2700/4000K available by request, contact your supplier.



Art. 1341
Art. 5156



Art. 157



Art. 1340
Art. 5111



GRIMSTAD






ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM


GRIMSTAD Recessed aluminium powder coated wall light. Supplied with tempered safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Front
1544	5,2W	LED	285 lm	3000K	70 000h	Dim. Triac	Open
1546	-	E14	-	-	-	-	Open
1545	7,4W	LED	67 lm	3000K	60 000h	Dim. Triac	Covered
1547	-	E14	-	-	-	-	Covered

Included recessing box.
2700/4000K available by request, contact your supplier.



Art. 1544
Art. 1546



Art. 1545
Art. 1547

NAMSOS



GALVANIZED | CE | 220-240V 50-60Hz | IP 44 | IK 10 | DIM

NAMSOS






ALUMINIUM | GRAPHITE | CE | 220-240V 50-60Hz | IP 65 | IK 08 | DIM

NAMSOS (GALVANIZED) Recessed aluminium powder coated wall light. Supplied with tempered safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
1933	5,2W	LED	295 lm	3000K	70 000h	Dim. Triac

Included recessing box.




Art. 1933

NAMSOS Recessed aluminium powder coated wall light. Supplied with tempered safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
1930	8,4W	LED	523 lm	3000K	50 000h	Dim. Triac
5011	8,7W	LED	576 lm	4000K	50 000h	Dim. Triac

Included recessing box.
2700/4000K or DALI available by request, contact your supplier.




Art. 1930
Art. 5011*


RENA COVER Aluminium powder coated inground lighting fixture. Supplied with opal polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Light control	Version
1630	-	LED GU10	-	-	-	-	Round
1631	5,5W	LED GU10	-	3000K	40 000h	Dim. Triac	Round
1768	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Round
1770	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Round
1632	-	LED GU10	-	-	-	-	Square
1633	5,5W	LED GU10	-	3000K	40 000h	Dim. Triac	Square
1772	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Square
1774	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Square


2700/4000K available by request, contact your supplier.
Polypropylene box for installation included. Standard with 3m cable, one cable gland. art. 1631, 1633: 5,5W GU10, 375lm, 3000K, 36D LED bulb included.
Art. 1630, 1632: Supplied without bulb



Art. 1630
Art. 1631



Art. 1632
Art. 1633



RENA






BLACK | GRAPHITE | STAINLESS STEEL | CE | 220-240V 50-60Hz | IP 68 | DIM


RENA Aluminium powder coated inground lighting fixture. Stainless steel 316L front and tempered safety clear or frosted glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Diffuser:	Light control	Angle
1550	5,5W	LED GU10	-	3000K	40 000h	Round	Clear	Dim. Triac	36°
1552	-	LED GU10	-	-	-	Round	Clear	-	-
1554	5,5W	LED GU10	-	3000K	40 000h	Round	Frosted	Dim. Triac	36°
1556	-	LED GU10	-	-	-	Round	Frosted	-	-
1760	4W	LED	439 lm	3000K	50 000h	Round	Clear	Dim. Triac	36°
1764	8W	LED	839 lm	3000K	50 000h	Round	Clear	Dim. Triac	36°
1551	5,5W	LED GU10	-	3000K	40 000h	Square	Clear	Dim. Triac	36°
1553	-	LED GU10	-	-	-	Square	Clear	-	-
1555	5,5W	LED GU10	-	3000K	40 000h	Square	Frosted	Dim. Triac	36°
1557	-	LED GU10	-	-	-	Square	Frosted	-	-
1762	4W	LED	439 lm	3000K	50 000h	Square	Clear	Dim. Triac	36°
1766	8W	LED	839 lm	3000K	50 000h	Square	Clear	Dim. Triac	36°

2700/4000K available by request, contact your supplier. Polypropylene box for installation included.
Standard with 3m cable, one cable gland. art. 1550, 1551, 1554, 1555: 5,5W GU10, 375lm, 3000K, 36D LED bulb included.
Art. 1552, 1553, 1556, 1557: Supplied without bulb



Art. 1550, 1552
Art. 1554, 1556
Art. 1760, 1764



Art. 1551 ,1553
Art. 1555 ,1557
Art. 1762, 1766





SANDE



GRAPHITE BLACK CE 220-240V 50-60Hz IP 65 IK 08


SANDE Aluminium powder coated landscape and shop lighting fixture. Adjustable head for tilting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version
1592	5,5W	LED GU10	276 lm	3000K	40 000h	Dim. Triac	Ground / Wall
1593	8,6W	LED	652 lm	3000K	80 000h	On/off	Ground / Wall
1594	8,6W	LED	652 lm	3000K	80 000h	On/off	Ground
1598	5,5W	LED GU10	276 lm	3000K	40 000h	Dim. Triac	Ground


Accessories Sande

1233	Cap
1234	Spike for Art. 1594 & Art. 1598


Art. 1592/1598: Symmetrical light with an angle of 36 degree.
Art. 1593/1594: Symmetrical light with an angle of 40 degree.
Art. 1592/1598: 5,5W LED GU10 bulb included, 375lm, 3000K, 40000h, 36D dimmable.
2700/4000K available by request, contact your supplier.




Art. 1592, 1593



Art. 1594, 1598



Art. 1233




Art. 1234

MOSS

NEW



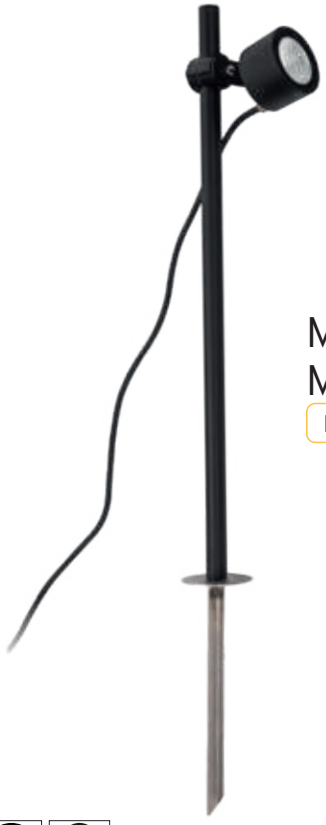

MOSS MOVE

NEW



BLACK GRAPHITE STAINLESS STEEL CE 220-240V 50-60Hz IP 65 DIM


MOSS Aluminium powder coated ground lighting with safety glass. Adjustable head for tilting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version	Angle
6165	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Ground, 3m cable	36°
6167	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Ground, 3m cable	36°
6602	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Ground 60cm, 3m cable	36°
6600	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Ground 60cm, 3m cable	36°


MOSS MOVE Aluminium powder coated and/or stainless steel ground lighting with safety glass. Adjustable head for tilting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version	Angle
6483	8W	LED	439 lm	3000K	50 000h	Dim. Triac	Mobile, 5m cable with plug, stainless steel	36°
6485	4W	LED	839 lm	3000K	50 000h	Dim. Triac	Mobile, 5m cable with plug, stainless steel	36°
6471	8W	LED	439 lm	3000K	50 000h	Dim. Triac	Mobile, 5m cable with plug	36°
6473	4W	LED	839 lm	3000K	50 000h	Dim. Triac	Mobile, 5m cable with plug	36°


2700/4000K available by request, contact your supplier.



Art. 6602, 6600



Art. 6471, 6473, 6483, 6485



Art. 6165, 6167







MOSS


NEW

BLACK GRAPHITE 220-240V 50-60Hz IP 65 DIM

MOSS Aluminium powder coated ground lighting with safety glass. Adjustable head for tilting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version	Angle
6161	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Ground / Wall	36°
6163	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Ground / Wall	36°
6772	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Wall / Ground	36°
6778	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Wall / Ground	36°
6706	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Wall arm 60cm	36°
6702	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Wall arm 60cm	36°


2700/4000K available by request, contact your supplier.
Optionally available with symmetrical light with an angle of 15 or 24 degrees.



Art. 6706, 6702



Art. 6772, 6778



Art. 6161, 6163









MOSS


NEW

BLACK | GRAPHITE | STAINLESS STEEL | CE | 220-240V 50-60Hz | IP 65 | DIM


MOSS Aluminium powder coated and/or stainless steel ground lighting with safety glass. Adjustable head for tilting.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version	Angle
6732	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø50	36°
6735	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø60	36°
6738	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø76	36°
6750	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø50	36°
6753	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø60	36°
6756	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Clamp for POLE Ø76	36°
6346	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Recessed in ceiling, screw, Ø120, stainless steel	36°
6370	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Recessed in ceiling, screw, Ø120, stainless steel	36°
6355	4W	LED	439 lm	3000K	50 000h	Dim. Triac	Recessed in ceiling, spring, Ø130	36°
6379	8W	LED	839 lm	3000K	50 000h	Dim. Triac	Recessed in ceiling, spring, Ø130	36°


2700/4000K available by request, contact your supplier.
Optionally available with symmetrical light with an angle of 15 or 24 degrees.



Art. 6346, 6370



Art. 6355, 6379



Art. 6732, 6735, 6738, 6750, 6753, 6756



NIDAROS

NEW








ALUMINIUM GRAPHITE WHITE

220-240V 50-60Hz IP 65 DIM


NIDAROS Aluminium powder coated ceiling light. Supplied with transparent safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Light control	Height	Angle
2120	10,7W	LED	631 lm	3000K	50 000h	Dim. Triac	9cm	24°
2121	8,3W	LED	631 lm	3000K	50 000h	Dim. Triac	18cm	24°
2122	8,3W	LED	631 lm	3000K	50 000h	Dim. Triac	23cm	24°
2123*	10,7W	LED	631 lm	4000K	50 000h	Dim. Triac	9cm	24°
2124*	8,3W	LED	631 lm	4000K	50 000h	Dim. Triac	18cm	24°
2125*	8,3W	LED	631 lm	4000K	50 000h	Dim. Triac	23cm	24°


*2700/4000K available by request, contact your supplier.



Art. 2120, 2123*



Art. 2121, 2124*



Art. 2122, 2125*





SANDVIK




ALUMINIUM GRAPHITE WHITE BLACK CE 220-240V 50-60Hz IP 54 IK 08 DIM

SANDVIK Aluminium powder coated ceiling light. Supplied with transparent safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70B50	Version	Light control
795	max 4W	LED GU10	-	-	-	Down	-
796	3,9W	LED GU10	477 lm	2700K	40 000h	Down	Dim. Triac

Art. 796: 3,9W LED GU10 bulb included, 265lm, 2700K, 40000h, 25D dimmable



Art. 795 i 796



BERGEN

GALVANIZED | BLACK | CE | 220-240V 50-60Hz | IP 55 | E27

LATINA






BLACK | WHITE | CE | 220-240V 50-60Hz | IP 44 | E27

BERGEN Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
271	-	II	E27	Clear	-
(Satin diffuser available as an option)					



Art. 271

LATINA Aluminium powder coated wall light. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Class	Type of light source	Diffuser: PC	Version	Light control
105	-	II	E27	Structure	Wall / Ceiling	-



Art. 105

KARLSTAD



GALVANIZED BLACK WHITE CE 220-240V 50-60Hz IP 55 E27

OSLO



GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27


KARLSTAD Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
230A	-	II	E27	Clear	-


OSLO Galvanized steel or galvanized and powder coated wall light. Clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
240A	-	II	E27	Clear	-

Satin diffuser available as an option



Art. 230A



Art. 240A

LOFOTEN









BLACK | CE | 220-240V 50-60Hz | IP 44 | E27

LOFOTEN Classic powder coated steel (electrogalvanized)wall fixtures with clear glass.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
1942	-	II	E27	Clear	-
1944	-	II	E27	Clear	-
1945	-	II	2 x E27	Clear	-



Art. 1942



Art. 1944



Art. 1945

LONDON



NEW



PRO



LED



BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27 | DALI2

CHELSEA






COPPER | CE | 220-240V 50-60Hz | IP 44 | E27


LONDON Aluminium powder coated ceiling lights. Supplied with transparent polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
481A	-	E27	-	-	-	-	-	
493A	-	E27	-	-	-	-		
4140	17,5W	LED	1392 lm	3000K	50 000h	On/off	-	
4142	19,4W	LED	2000 lm	3000K	>120 000h	DALI2	IESNA Type VS	PRO

2700/4000K available by request, contact your supplier.



Art. 481A




Art. 493A
Art. 4140*
Art. 4142*

CHELSEA Handmade of copper and supplied with clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
961	-	II	E27	Clear	-

Copper fittings are supplied in a raw finish to alow natural patina over time.



Art. 961





STAVANGER



ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM


STAVANGER Powder coated aluminium bollard. diffuser: UV stabilised, vandal resistant. Indirect LED light output.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control	Diffuser	IK
1240	12,2W	LED	421 lm	3000K	50 000h	95cm	Dim. Triac	PC Clear	IK10
1243	-	E27	-	-	-	95cm	-	PMMA Frosted	
5008*	12,2W	LED	493 lm	4000K	50 000h	95cm	Dim. Triac	PC Clear	IK10
1244	12,2W	LED	421 lm	3000K	50 000h	50cm	Dim. Triac	PC Clear	IK10
1246	-	E27	-	-	-	50cm	-	PMMA Frosted	
5009*	12,2W	LED	-	4000K	50 000h	50cm	Dim. Triac	PC Clear	IK10
1247	8,4W	LED	308 lm	3000K	50 000h	28cm	Dim. Triac	PC Clear	IK10
1248	-	E27	-	-	-	28cm	-	PMMA Frosted	
5010*	8,4W	LED	351 lm	4000K	50 000h	28cm	Dim. Triac	PC Clear	IK10


ACCESSORIES Stavanger

1230	Concreting anchor	p. 131
1231	Anchoring support	p. 131


*2700/4000K or DALI2 available by request, contact your supplier.



Art. 1240
Art. 1243
Art. 5008*



Art. 1244
Art. 1246
Art. 5009*



Art. 1247
Art. 1248
Art. 5010*



Photo: Simrishamns Höydfoto


NARVIK



ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 IK 10 DIM DALI2

NARVIK Powder coated aluminium vandal resistant. Polycarbonate transparent or frosted diffuser. Inspection door.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Diffuser	
557	21,8W	LED	556 lm	3000K	>50 000h	On/off	Clear	
5024	21,8W	LED	564 lm	4000K	>50 000h	On/off	Clear	
5090*	21,8W	LED	582 lm	4000K	>50 000h	DALI2	Clear	
5091*	22,5W	LED	597 lm	3000K	>50 000h	DALI2	Clear	
553	15W	LED	800 lm	3000K	>72 000h	Dim. Triac	Clear	PRO
559	15W	LED	800 lm	3000K	>72 000h	Dim. Triac	Frosted	PRO
5094*	15W	LED	800 lm	4000K	>72 000h	Dim. Triac	Clear	PRO
5095*	15W	LED	800 lm	4000K	>72 000h	Dim. Triac	Frosted	PRO



ACCESSORIES Narvik

505	Concreting anchor	p. 131

*2700/4000K available by request, contact your supplier.




Photo:Strömstads Höydfoto

EGERSUND Powder coated aluminium bollard. Clear PMMA diffuser. Indirect LED light output.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
1280	22W	LED	1586 lm	3000K	50 000h	108cm	On/off
5014*	22W	LED	1801 lm	4000K	50 000h	108cm	On/off
5066*	23W	LED	1724 lm	4000K	50 000h	108cm	DALI2
5068*	23W	LED	1586 lm	3000K	50 000h	108cm	DALI2
1285	22W	LED	1586 lm	3000K	50 000h	65cm	On/off
5015*	22W	LED	1801 lm	4000K	50 000h	65cm	On/off
5067*	23W	LED	1724 lm	4000K	50 000h	65cm	DALI2
5069*	23W	LED	1586 lm	3000K	50 000h	65cm	DALI2

Accessories Egersund		
1230	Concreting anchor	p. 131
1231	Anchoring support	p. 131

*2700/4000K available by request, contact your supplier.



Art. 1280
Art. 5014*
Art. 5066*
Art. 5068*

Art. 1285
Art. 5015*
Art. 5067*
Art. 5069*

EGERSUND







EGERSUND MINI








EGERSUND MINI Powder coated aluminium bollard. Clear PMMA diffuser. Indirect LED light output.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
1290	10W	LED	864 lm	3000K	50 000h	85cm	Dim. Triac
5117*	10W	LED	922 lm	4000K	50 000h	85cm	Dim. Triac
1291	10W	LED	864 lm	3000K	50 000h	49cm	Dim. Triac
5118*	10W	LED	922 lm	4000K	50 000h	49cm	Dim. Triac

Accessories Egersund Mini		
205	Concreting anchor	p. 130
206	Anchoring support	p. 130

* 2700/4000K available by request, contact your supplier.



Art. 1290
Art. 5117*



Art. 1291
Art. 5118*



OPPLAND

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 54 DIM IK 09







KISA

NEW

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM DALI2







OPPLAND Powder coated aluminium bollard. Diffuser: UV stabilised polycarbonate. Indirect LED light output.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
1321	9,3W	LED	301 lm	3000K	>50 000h	Dim. Triac
5123	9,3W	LED	322 lm	4000K	>50 000h	Dim. Triac


KISA Powder coated aluminium bollard. Diffuser: PMMA frosted.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version
5180	8,8W	LED	706 lm	3000K	>70 000h	Dim. Triac	One-sided light
5181	8,8W	LED	701 lm	4000K	>70 000h	Dim. Triac	One-sided light
5182	14,1W	LED	1185 lm	3000K	>70 000h	DALI2	One-sided light
5183	14,2W	LED	1222 lm	4000K	>70 000h	DALI2	One-sided light
5184	15,2W	LED	1407 lm	3000K	>70 000h	Dim. Triac	Two-sided light
5185	15,2W	LED	1492 lm	4000K	>70 000h	Dim. Triac	Two-sided light
5186	27W	LED	2432 lm	3000K	>70 000h	DALI2	Two-sided light
5187	27W	LED	2579 lm	4000K	>70 000h	DALI2	Two-sided light


ACCESSORIES Oppland i Kisa

205	Concreting anchor	p. 130
206	Anchoring support	p. 130


*2700/4000K available by request, contact your supplier.



Art. 1321, 5123



Art. 5180, 5181, 5182, 5183



Art. 5184, 5185, 5186, 5187



LILLESAND




ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 55 IK 08 DIM

LILLESAND Powder coated aluminium bollard. Frosted PMMA diffuser.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
1380	-	E27	-	-	-	85cm	-
1382	-	LED E27	-	2700K	25 000h	85cm	Dim. Triac
2330	9,3W	LED	897 lm	3000K	>72 000h	85cm	Dim. Triac
2331*	9,3W	LED	957 lm	4000K	>72 000h	85cm	Dim. Triac
2342	9,3W	LED	897 lm	3000K	>72 000h	49cm	Dim. Triac
2343*	9,3W	LED	957 lm	4000K	>72 000h	49cm	Dim. Triac

ACCESSORIES Lillesand		
205	Concreting anchor	p. 130
206	Anchoring support	p. 130

Art. 1382: 8,5W LED E27 bulb included, 806lm, 2700K, 25000h dimmable.
2700/4000K or DALI2 available by request, contact your supplier.




Art. 1380, 1382, 2330, 2331*



Art. 2342, 2343*



ASKER

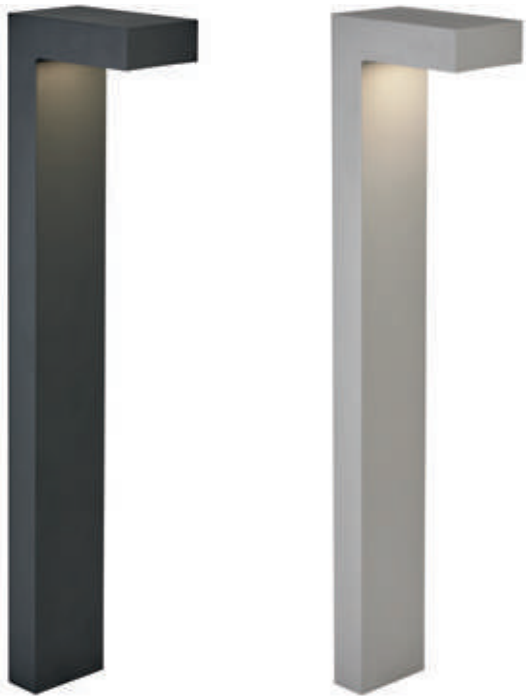







ALUMINIUM GRAPHITE BLACK CE 220-240V 50-60Hz IP 65

ASKER Aluminium powder coated bollard. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Lens	Height	
1310	9,5W	LED	585 lm	3000K	50 000h	On/off	-	55cm	
1311	10,3W	LED	537 lm	3000K	50 000h	On/off	-	85cm	
1314	7,7W	LED	697 lm	3000K	>109 000h	Dim. Triac	IESNA Type II/III	85cm	
1315	7,8W	LED	683 lm	3000K	>109 000h	DALI	IESNA Type II/III	85cm	PRO
1316	7,7W	LED	604 lm	3000K	>109 000h	Dim. Triac	IESNA Type V	85cm	PRO
1317	7,8W	LED	599 lm	3000K	>109 000h	DALI	IESNA Type V	85cm	PRO
1318*	7,7W	LED	724 lm	4000K	>109 000h	Dim. Triac	IESNA Type II/III	85cm	PRO
1319*	7,8W	LED	706 lm	4000K	>109 000h	DALI	IESNA Type II/III	85cm	PRO
1320*	7,7W	LED	617 lm	4000K	>109 000h	Dim. Triac	IESNA Type V	85cm	PRO
1322*	7,8W	LED	616 lm	4000K	>109 000h	DALI	IESNA Type V	85cm	PRO
5120*	9,5W	LED	636 lm	4000K	50 000h	On/off	-	55cm	
5124*	9,5W	LED	640 lm	4000K	50 000h	On/off	-	85cm	



Art. 1311, 1312, 1314, 1315, 1316, 1317, 1318, 1319, 1320, 1322, 5124



Art. 1310, 5120

Accessories for Asker Art. 1311 i 1314

1907	Concreting anchor	p. 131
1908	Anchoring support	p. 131

*2700/4000K available by request, contact your supplier.



MOLDE






ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 54 IK 07 DIM

MOLDE Aluminium powder coated bollard. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
1901	8W	LED	386 lm	3000K	50 000h	80cm	Dim. Triac
5107*	8W	LED	386 lm	4000K	50 000h	80cm	Dim. Triac

ACCESSORIES Molde Art. 1901		
1907	Concreting anchor	p. 131
1908	Anchoring support	p. 131



* 2700/4000K available by request, contact your supplier.




NAMSOS Aluminium powder coated bollard. Supplied with tempered safety glass.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
1931	8,4W	LED	523 lm	3000K	>50 000h	95cm	Dim. Triac
5012*	8,4W	LED	557 lm	4000K	>50 000h	95cm	Dim. Triac
1932	8,4W	LED	523 lm	3000K	>50 000h	65cm	Dim. Triac
5013*	8,4W	LED	557 lm	4000K	>50 000h	65cm	Dim. Triac


ACCESSORIES Namsos for Art. 1931 i 1932

112	Concreting anchor	p. 130
113	Anchoring support	p. 130

* 2700/4000K available by request, contact your supplier.



Art. 1931
Art. 5012*



Art. 1932
Art. 5013*

NAMSOS





ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM

ARVIKA





GALVANIZED BLACK CE 220-240V 50-60Hz IP 44

ARVIKA Galvanized steel or galvanized and powder coated. Supplied with clear polycarbonate glass.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control	Connectors
891	12,7W	LED	593 lm	3000K	72 000h	89cm	On/off	-
893	12,7W	LED	593 lm	3000K	72 000h	89cm	On/off	F (Schuko) 2x230V
898	-	E27	-	-	-	89cm	-	-
899	-	E27	-	-	-	89cm	-	F (Schuko) 2x230V

Accessories Arvika

208	Concreting anchor	p. 131

Arvika 893/899 is delivered with two F type (shuko), automatic fuses and circuit breaker. Art. 893/899 are not intended for charging El/hybrid cars or for use on piers near the sea. Any use mentioned above results in the complete loss of all warranty and liability claims of the buyer.


2700/4000K available by request, contact your supplier.



Art. 891
Art. 893
Art. 898
Art. 899

HELLVIK

NEW

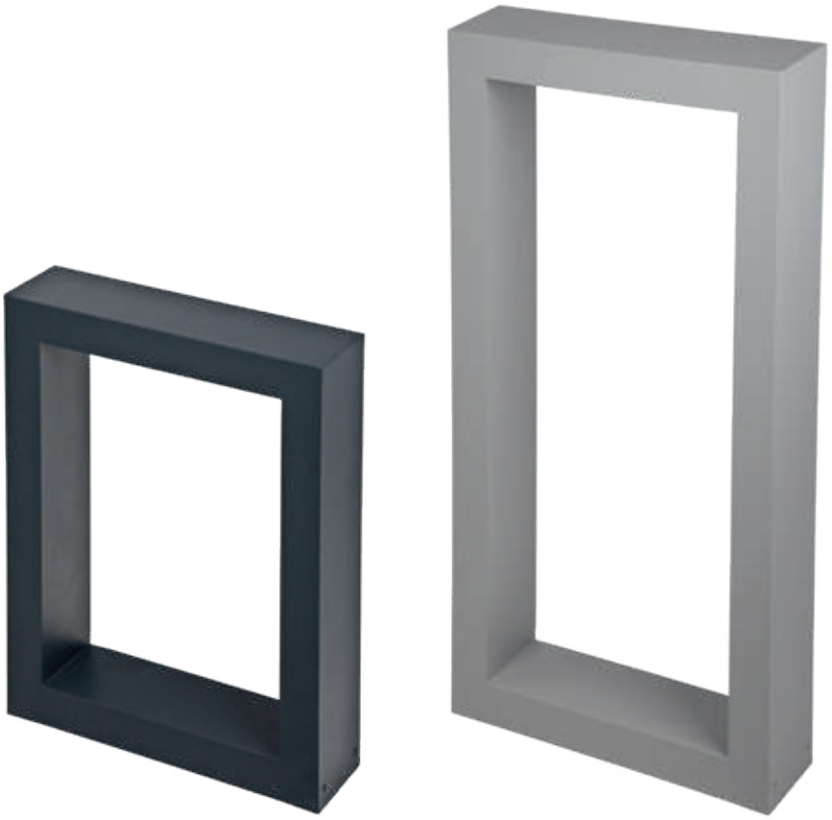

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM


HELLVIK Aluminium powder coated bollard. Supplied with transparent polycarbonate diffuser with structure.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Height
2400	6,9W	LED	531 lm	3000K	>72 000h	Dim. Triac	55cm
2401*	6,9W	LED	575 lm	4000K	>72 000h	Dim. Triac	55cm
2410	11,8W	LED	1014 lm	3000K	>72 000h	Dim. Triac	85cm
2411*	11,8W	LED	1072 lm	4000K	>72 000h	Dim. Triac	85cm


ACCESSORIES Hellvik

1907	Concreting anchor (2 pcs needed)	p. 131
1908	Anchoring support (2 pcs needed)	p. 131

* 2700/4000K available by request, contact your supplier.



Art. 2400, 2401



Art. 2410, 2411

BORG

NEW



ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM


BORG Powder coated aluminium bollard. Frosted PMMA diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Height
6120	16,1W	LED	1358 lm	3000K	>72 000h	Dim. Triac	35cm
6121*	16W	LED	1396 lm	4000K	>72 000h	Dim. Triac	35cm
6170	16,1W	LED	1358 lm	3000K	>72 000h	On/off	55cm
6171*	16W	LED	1396 lm	4000K	>72 000h	Dim. Triac	55cm
6180	16,1W	LED	1358 lm	3000K	>72 000h	On/off	85cm
6181*	16W	LED	1396 lm	4000K	>72 000h	Dim. Triac	85cm
6190	16W	LED	1358 lm	3000K	>72 000h	Dim. Triac	105cm
6191*	16W	LED	1396 lm	4000K	>72 000h	Dim. Triac	105cm


ACCESSORIES Borg

202	Anchoring support	p. 131
203	Concreting anchor	p. 130

* 2700/4000K available by request, contact your supplier.



Art. 6120, 6121 Art. 6170, 6171



Art. 6180, 6181 Art. 6190, 6191





ALTA




GALVANIZED BLACK CE 220-240V 50-60Hz IP 65 IK 10 DIM

ALTA Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate diffuser.

Art	Watt	Class	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
291	-	II	E27	-	-	-	85cm	-
1475	8,5W	II	LED E27	-	2700K	25 000h	85cm	Dim. Triac
1479	8,5W	I	LED	146 lm	3000K	50 000h	85cm	Dim. Triac
293	-	II	E27	-	-	-	49cm	-
1476	8,5W	II	LED E27	-	2700K	25 000h	49cm	Dim. Triac
1477	8,5W	I	LED	146 lm	3000K	50 000h	49cm	Dim. Triac


ACCESSORIES Alta		
205	Concreting anchor	p. 130
206	Anchoring support	p. 130

Art. 1475/1477: 8,5W LED E27 included, 806lm, 2700K, 25000h dimmable.
2700/4000K or DALI available by request, contact your supplier.



Art. 293
Art. 1476
Art. 1477

Art. 291
Art. 1475
Art. 1479





SCANDINAVIAN WOOD

NEW





ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM


SCANDINAVIAN WOOD Our wooden bollards combining modern lighting in harmony with natural materials.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Wood	Height	Model
2304	9,1W	LED	864 lm	3000K	72 000h	Dim. Triac	painted	85cm	Egersund Mini
2308	9,1W	LED	864 lm	3000K	72 000h	Dim. Triac	impregnated	85cm	Egersund Mini
2316	9,1W	LED	864 lm	3000K	72 000h	Dim. Triac	painted	49cm	Egersund Mini
2320	9,1W	LED	864 lm	3000K	72 000h	Dim. Triac	impregnated	49cm	Egersund Mini
2334	9,1W	LED	897 lm	3000K	72 000h	Dim. Triac	painted	85cm	Lillesand
2338	9,1W	LED	897 lm	3000K	72 000h	Dim. Triac	impregnated	85cm	Lillesand
2346	9,1W	LED	897 lm	3000K	72 000h	Dim. Triac	painted	49cm	Lillesand
2350	9,1W	LED	897 lm	3000K	72 000h	Dim. Triac	impregnated	49cm	Lillesand
2360	10W	LED	301 lm	3000K	>50 000h	Dim. Triac	painted	85cm	Oppland
2364	10W	LED	301 lm	3000K	>50 000h	Dim. Triac	impregnated	85cm	Oppland

Accessories Scandinavian Wood


205	Concreting anchor	p. 130
206	Anchoring support	p. 130

2700/4000K or DALI2 available by request, contact your supplier.
We use a selection of first class Scandinavian pine wood, impregnated for protection.
Impregnated only: without painting on request to allow customized colours.



Art. 2346
Art. 2350

Art. 2316
Art. 2320



Art. 2334
Art. 2338

Art. 2304
Art. 2308

Art. 2360
Art. 2364






GALVANIZED BLACK CE 220-240V 50-60Hz IP 65 IK 10


SCANDINAVIAN WOOD Our wooden bollards combining modern lighting in harmony with natural materials.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Wood	Height	Model
1400	-	E27	-	-	-	-	painted	49cm	Halmstad
1409	8,5W	LED	292lm	3000K	>50 000h	Dim. Triac	painted	49cm	Halmstad
1410	-	E27	-	-	-	-	painted	85cm	Halmstad
1419	8,5W	LED	292lm	3000K	>50 000h	Dim. Triac	painted	85cm	Halmstad
1420	-	E27	-	-	-	-	painted	85cm	Stockholm
1429	8,4W	LED	342lm	3000K	>50 000h	Dim. Triac	painted	85cm	Stockholm
1430	-	E27	-	-	-	-	painted	49cm	Stockholm
1439	8,4W	LED	342lm	3000K	>50 000h	Dim. Triac	painted	49cm	Stockholm
1440	-	E27	-	-	-	-	painted	85cm	Alta
1450	-	E27	-	-	-	-	painted	49cm	Alta
1665	8,3W	LED	146lm	3000K	>50 000h	Dim. Triac	painted	85cm	Alta
1669	8,3W	LED	146lm	3000K	>50 000h	Dim. Triac	painted	49cm	Alta
Accessories Scandinavian Wood									
205		Concreting anchor					p. 130		
206		Anchoring support					p. 130		

2700/4000K available by request, contact your supplier.
We use a selection of first class Scandinavian pine wood, impregnated for protection.
Impregnated only: without painting on request to allow customized colours.



Art. 1400 Art. 1409 | Art. 1430 Art. 1439 | Art. 1450 Art. 1669



Art. 1410 Art. 1419 | Art. 1420 Art. 1429 | Art. 1440 Art. 1665



HALMSTAD




GALVANIZED BLACK GRAPHITE CE 220-240V 50-60Hz IP 65 IK 10 DIM

HALMSTAD Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate diffuser.

Art	Watt	Class	Type of light source	Luminous flux	Colour temperature	L70/B50	Height	Light control
210	-	II	E27	-	-	-	26cm	-
212	8,5W	II	LED E27	-	2700K	25 000h	26cm	Dim. Triac
211	10W	I	LED	295 lm	3000K	50 000h	26cm	Dim. Triac
295	-	II	E27	-	-	-	49cm	-
1488	8,5W	II	LED E27	-	2700K	25 000h	49cm	Dim. Triac
1489	8,5W	II	LED	292 lm	3000K	50 000h	49cm	Dim. Triac
296	-	II	E27	-	-	-	85cm	-
1483	8,5W	II	LED E27	-	2700K	25 000h	85cm	Dim. Triac
1482	8,5W	II	LED	292 lm	3000K	50 000h	85cm	Dim. Triac

Accessories Halmstad		
205	Concreting anchor	p. 130
206	Anchoring support	p. 130


Art. 212/1488/1483: 8,5W LED E27 included, 806lm, 2700K, 25000h dimmable.
2700/4000K or DALI available by request, contact your supplier.



Art. 210
Art. 211
Art. 212

Art. 295
Art. 1488
Art. 1489

Art. 296
Art. 1482
Art. 1483






STOCKHOLM Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate diffuser.

Art	Watt	Class	Type of light source	Luminous flux	Colour temperature	L70/B50	Diffuser	Height	Light control
299	-	II	E27	-	-	-	Opal	28cm	-
1269	8,5W	II	LED E27	-	2700K	25 000h	Opal	28cm	Dim. Triac
1268	10W	I	LED	333 lm	3000K	50 000h	Opal	28cm	Dim. Triac
289	-	II	E27	-	-	-	Opal	49cm	-
298	-	II	E27	-	-	-	Clear	49cm	-
1469	8,5W	II	LED E27	294 lm	2700K	25 000h	Opal	49cm	Dim. Triac
1260	8,5W	II	LED	342 lm	3000K	50 000h	Opal	49cm	Dim. Triac


ACCESSORIES Stockholm

205	Concreting anchor	p. 130
206	Anchoring support	p. 130

Art. 1269/1469: 8,5W LED E27 included, 806lm, 2700K, 25000h dimmable.
2700/4000K or DALI available by request, contact your supplier.



Art. 299
Art. 1269
Art. 1268



Art. 289
Art. 298
Art. 1469
Art. 1260

STOCKHOLM



GALVANIZED BLACK CE 220-240V 50-60Hz IP 65 IK 10 DIM

STOCKHOLM Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate diffuser.

Art	Watt	Class	Type of light source	Luminous flux	Colour temperature	L70/B50	Diffuser	Height	Light control
288	-	II	E27	-	-	-	Opal	85cm	-
297	-	II	E27	-	-	-	Clear	85cm	-
1464	8,5W	II	LED E27	294 lm	2700K	25 000h	Opal	85cm	Yes
1265	8,5W	II	LED	342 lm	3000K	50 000h	Opal	85cm	Yes

ACCESSORIES Stockholm		
205	Concreting anchor	p. 130
206	Anchoring support	p. 130

Art. 1464: 8,5W LED E27 included, 806lm, 2700K, 25000h dimmable.
2700/4000K or DALI available by request, contact your supplier.



Art. 288
Art. 297
Art. 1464
Art. 1265





ARENDAL




GALVANIZED BLACK GRAPHITE CE 220-240V 50-60Hz IP 65 IK 08 DIM

ARENDAL Galvanized steel or galvanized and powder coated bollard. Tempered thick glass, frosted inside.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Dimensions	Light control
1560	-	E27	-	-	-	85 x 12cm	-
1565	-	E27	-	-	-	49 x 12cm	-
1569	-	E27	-	-	-	35 x 12cm	-
1561*	4W	LED	330 lm	3000K	50 000h	64,2 x 9cm	Dim. Triac
1566*	4W	LED	330 lm	3000K	50 000h	64,2 x 9cm	Dim. Triac

ACCESSORIES Arendal			
205	Concreting anchor	For Art. 1560, 1565 i 1569	p. 130
206	Anchoring support	For Art. 1560, 1565 i 1569	p. 130
203	Concreting anchor	For Art. 1561 i 1566	p. 130
204	Anchoring support	For Art. 1561 i 1566	p. 130


2700/4000K available by request, contact your supplier.




Art. 1560




Art. 1565



Art. 1569



Art. 1561



Art. 1566




VISBY Powder coated aluminium, clear polycarbonate diffuser. For poles with 60mm external diameter at top.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
576	44,5W	2 LED	2465 lm	3000K	50 000h	On/off
5002	44,5W	2 LED	2616 lm	4000K	50 000h	On/off
577	27W	LED	1388 lm	3000K	50 000h	On/off
5003	27W	LED	1482 lm	4000K	50 000h	On/off


ACCESSORIES Visby

3004	Pole Ø76 - possibility of purchasing with dedicated accessories	p. 129
7660	Adapter Ø60 for install on pole Ø76	p. 130
154	Arm for use on wall	p. 130


2700/4000K or DALI2 available by request, contact your supplier.




Art. 576
Art. 577
Art. 5002*
Art. 5003*




Art. 3004



Art. 7660



Art. 576
Art. 5002*



Art. 577
Art. 5003*

VISBY






ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65

NICE



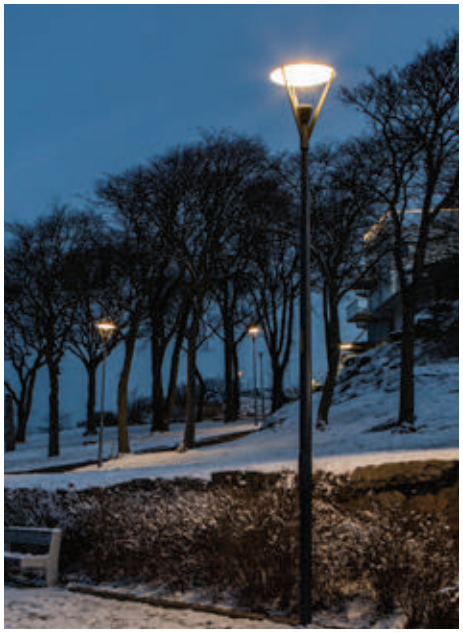

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65


NICE Aluminium powder coated pole-top. Clear glass. For poles with 60mm external diameter at top.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control
777	36,4W	LED	3190 lm	3000K	50 000h	On/off
5001	34,9W	LED	3240 lm	4000K	50 000h	On/off


Accessories Nicea

3004	Pole Ø76 - possibility of purchasing with dedicated accessories	p. 129
7665	Adapter Ø60 for install on pole Ø76	p. 130
154	Arm for use on wall	p. 130


2700/4000K or DALI available by request, contact your supplier.




Art. 777
Art. 5001



Art. 3004



Art. 154



Art. 7665



BORG







BORG ON POLE 3004
HEIGHT 4,5m


ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 IK 08 DALI2 D4i

BORG Aluminium powder coated pole-top. For poles with 60mm top-diameter. diffuser PMMA.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Diffuser	Ulor	
5141	33W	LED	3735 lm	3000K	>72 000h	DALI2	Frosted	0%	
5143	32W	LED	3735 lm	3000K	>72 000h	D4i	Frosted	0%	
5146	33W	LED	2953 lm	3000K	>72 000h	DALI2	Opal	0%	
5148	32W	LED	2996 lm	3000K	>72 000h	D4i	Opal	0%	
6150	32W	LED	3735 lm	3000K	>72 000h	On/off	Frosted	0%	
6151	32W	LED	2996 lm	3000K	>50 000h	On/off	Opal	0%	
6153	53W	LED	6900 lm	3000K	>72 000h	DALI2	Clear	0%	PRO
6154	53W	LED	6900 lm	3000K	>72 000h	D4i	Clear	0%	PRO

ACCESSORIES Borg		
3004	Pole Ø76 - possibility of purchasing with dedicated accessories	p.129
7660	Adapter Ø60 for install on pole Ø76	p.130
154	Arm for use on wall	p.130


2700/4000K available by request, contact your supplier.



Art. 6150
Art. 6151
Art. 5140*
Art. 5141*



Art. 3004



Art. 154









HAMMERFEST


ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 IK 07 DALI2 D4i

HAMMERFEST Aluminium powder coated pole-top. For poles with 60mm top-diameter. Diffuser PMMA.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Diffuser	Ulor	
5131	32,5W	LED	3974 lm	3000K	>72 000h	DALI2	Frosted	2%	
5136	32,5W	LED	3117 lm	3000K	>72 000h	DALI2	Opal	2%	
6140	26,4W	LED	3869 lm	3000K	>50 000h	On/off	Frosted	2%	
6141	32,7W	LED	3227 lm	3000K	>50 000h	On/off	Opal	2%	
6146	52,1W	LED	5200 lm	3000K	>100 000h	DALI2	Clear	2%	PRO
6147	52,1W	LED	5200 lm	3000K	>100 000h	D4i	Clear	2%	PRO

ACCESSORIES Hammerfest		
3004	Pole Ø76 - possibility of purchasing with dedicated accessories	p.129
7665	Adapter Ø60 for install on pole Ø76	p.130
154	Arm for use on wall	p.130


2700/4000K available by request, contact your supplier.




Art. 6140
Art. 6141
Art. 5130*
Art. 5135*



Art. 3004




Art. 154



Art. 7665



EGERSUND PARK

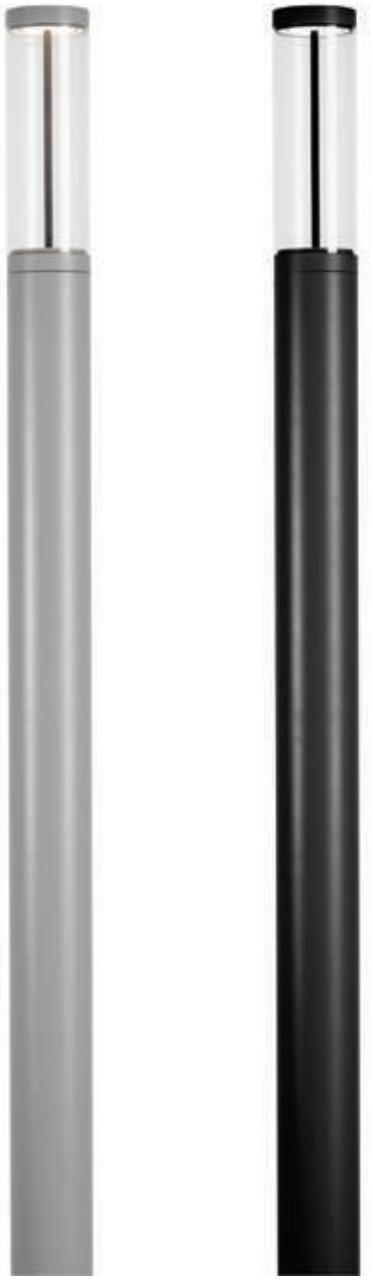

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 65 DIM DALI2


EGERSUND PARK Aluminium powder coated pole. Ideal for path-way lighting where light pollution is an issue.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Class	Ulor	Extra	
6105	9,1W	LED	907 lm	3000K	>72 000h	Dim. Triac	II	1%	Inspection door.	
6107*	9,1W	LED	962 lm	4000K	>72 000h	Dim. Triac	II	1%	Inspection door.	
6113	23,7W	LED	2239 lm	3000K	>72 000h	DALI2	I	1%	Inspection door.	PRO
6115*	23,9W	LED	2314 lm	4000K	>72 000h	DALI2	I	1%	Inspection door.	PRO
6117	10W	LED	959 lm	3000K	>50 000h	Dim. Triac	II	2%	-	
6118*	10W	LED	1064 lm	4000K	>50 000h	Dim. Triac	II	2%	-	


ACCESSORIES Egersund park		
6130	Concreting anchor	p.131
6132	Anchoring support 490mm	
6135	Electric box	for Art. 6105, 6107, 6113, 6115

2700/4000K available by request, contact your supplier.






Art.6132



Art.6135





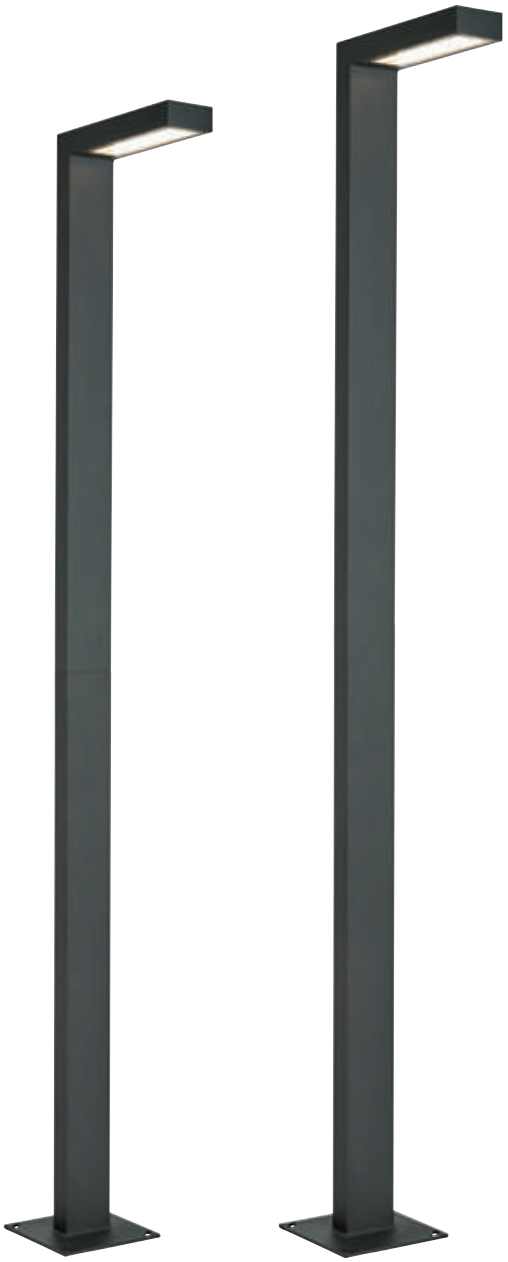


ASKER

ALUMINIUM GRAPHITE BLACK CE 220-240V 50-60Hz DIM

ASKER Aluminium powder coated pole. Ideal for path-way lighting where light pollution is an issue.


Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	IP	Version	Lens	Height	
1360	18W	LED	962lm	3000K	50 000h	Dim. Triac	65/55	two-piece	-	216cm	
1361	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type III	216cm	PRO
1363	18W	LED	962 lm	3000K	50 000h	Dim. Triac	65	one-piece	-	236cm	
1364	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65	one-piece	IESNA Type V	236cm	PRO
1366	8,4W	LED	1018 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type III	216cm	PRO
1367	8,4W	LED	1033 lm	3000K	>120 000h	On/off	65	one-piece	IESNA Type III	236cm	PRO
5202	19,6W	LED	2550 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type V	350cm	PRO
5206	19,6W	LED	2520 lm	3000K	>120 000h	On/off	65/55	two-piece	IESNA Type III	350cm	PRO



Art. 1360 Art. 1363
Art. 1361 Art. 1364
Art. 1366 Art. 1367

ACCESSORIES Asker

116	Concreting anchor	p. 130
117	Anchoring support	p. 130



Art. 5202, 5206

2700/4000K or DALI2 available by request, contact your supplier.




KISA

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz DIM DALI2 IP 55


KISA Powder coated aluminium pole. Frosted PMMA diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Version
5190	8,8W	LED	706 lm	3000K	>70 000h	Dim. Triac	One-sided light
5191*	8,9W	LED	766 lm	4000K	>70 000h	Dim. Triac	One-sided light
5192	14,1W	LED	1185 lm	3000K	>70 000h	DALI2	One-sided light
5193*	14,2W	LED	1222 lm	4000K	>70 000h	DALI2	One-sided light
5194	15,2W	LED	1407 lm	3000K	>70 000h	Dim. Triac	Two-sided light
5195*	15,3W	LED	1450 lm	4000K	>70 000h	Dim. Triac	Two-sided light
5196	27W	LED	2432 lm	3000K	>70 000h	DALI2	Two-sided light
5197*	27,1W	LED	2500 lm	4000K	>70 000h	DALI2	Two-sided light
ACCESSORIES Kisa							
6130	Concreting anchor			p.131			
6132	Anchoring support 490mm						
6135	Electric box						


*2700/4000K available by request, contact your supplier.




Art.5190, 5191, 5192, 5193



Art.5194, 5195, 5196, 5197



Art.6132



Art.6135







NEW

PRO



KOSTER

ALUMINIUM GRAPHITE CE 220-240V 50-60Hz IP 54 IK 10




Art. 1812, 1816, 1914


KOSTER Aluminium powder coated. Optical structure polycarbonate diffuser. Ideally suited for use in communal

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Lens	Version
1811	14,4W	LED	1975 lm	3000K	>120 000h	On/off	IESNA Type III	Only lamp head Ø50
1812	14,4W	LED	1975 lm	3000K	>120 000h	On/off	IESNA Type III	Set with pole
1813	14,4W	LED	1975 lm	3000K	>120 000h	On/off	IESNA Type III	Only lamp head Ø60
1815	14,4W	LED	1991 lm	3000K	>120 000h	On/off	IESNA Type V	Only lamp head Ø50
1816	14,4W	LED	1991 lm	3000K	>120 000h	On/off	IESNA Type V	Set with pole
1817	14,4W	LED	1991 lm	3000K	>120 000h	On/off	IESNA Type V	Only lamp head Ø60
1913	17,5W	LED	1568 lm	3000K	50 000h	On/off	-	Only lamp head Ø60
1914	17,5W	LED	1568 lm	3000K	50 000h	On/off	-	Set with pole
1915	17,5W	LED	1568 lm	3000K	50 000h	On/off	-	Only lamp head Ø50

PRO
PRO
PRO
PRO
PRO
PRO



Art. 1811, 1815, 1915



Art. 1813, 1817, 1913

ACCESSORIES Koster

3004	Pole Ø76 - possibility of purchasing with dedicated accessories	p. 129	for Art. 1813, 1817, 1913
7660	Adapter Ø60 for mounting on pole Ø76	p. 130	for Art. 1813, 1817, 1913
405	Concreting anchor	p. 131	for Art. 1812, 1816, 1914
406	Anchoring support	p.131	for Art. 1812, 1816, 1914

2700/4000K or DALI2 available by request, contact your supplier.



STOCKHOLM




GALVANIZED | BLACK | CE | 220-240V 50-60Hz | IP 54 | E27

STOCKHOLM Galvanized steel or galvanized and powder coated fixture with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control	Height
284	-	II	E27	Clear	-	34,5cm
287	-	II	E27	Clear	-	47,5cm
285	-	II	E27	Clear	-	118cm

Accessories Art. 284, 285 and 287


Concreting anchor included for Art. 284, 285, 287.



Art. 284



Art. 287



Art. 285











STOCKHOLM Adjustable pole fixture with single or double head for use with E27 light sources.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control	Version
281	-	II	E27	Clear	-	Single head
283	-	II	2 x E27	Clear	-	Double head

Accessories Art. 281 i 283	
405	Concreting anchor
406	Anchoring support



Art. 281



Art. 283





LUND


GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27

LUND Adjustable pole fixture with single or double head for use with E27 light sources.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control	Version
274	-	II	E27	Clear	-	Single head
275	-	II	2 x E27	Clear	-	Double head

ACCESSORIES Lund

405	Concreting anchor
406	Anchoring support



Art. 274



Art. 275



KARLSTAD

NEW





OSLO

GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27

GALVANIZED BLACK CE 220-240V 50-60Hz IP 55 E27

OSLO Adjustable pole fixture with single or double head for use with E27 light sources.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control	Version	Type
245	-	II	E27	Clear	-	Single head	Pillar
Art. 245: Concreting anchor included							
242	-	II	2 x E27	Clear	-	Double head	Pole

ACCESSORIES Oslo


405	Concreting anchor	for Art. 242	p. 131
406	Anchoring support	for Art. 242	p. 131

KARLSTAD Adjustable pole fixture with single or double head for use with E27 light sources.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control	Version	Type
2032	-	II	2 x E27	Clear	-	Double head	Pole
2033	-	II	E27	Clear	-	Single head	Pole

ACCESSORIES Karlstad


405	Concreting anchor	for Art. 2032, 2033	p.131
406	Anchoring support	for Art. 2032, 2033	p.131




Art. 245



Art. 242



Art. 2032



Art. 2033







LOFOTEN

NEW






BLACK | CE | 220-240V 50-60Hz | IP 44 | E27


LOFOTEN Classic powder coated steel (electrogalvanized) pedestal, pillar or pole fixture with clear or opal glass.

Art	Watt	Class	Type of light source	Light control	Diffuser
1941	-	II	E27	-	Clear
1961	-	II	E27	-	Opal
1946	-	II	E27	-	Clear
1947	-	II	2 x E27	-	Clear


Accessories for Lofoten Art. 1946,1947			
205	Concreting anchor	p. 130	For Art. 1946
206	Anchoring support	p. 130	For Art. 1946
405	Concreting anchor	p. 131	For Art. 1947
406	Anchoring support	p. 131	For Art. 1947



Art. 1941, Art. 1961



Art. 1946



Art. 1947





LONDON




BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27 | DALI2

LONDON Aluminium powder coated fixtures with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Light control
484	-	II	E27	Clear	-
494	-	II	E27	Clear	-
485	-	II	E27	Clear	-

Accessories London for Art. 484, 485 and 494


307	Concreting anchor	p. 130



Art. 484



Art. 494



Art. 485




LONDON Aluminium powder coated fixtures with clear polycarbonate diffuser.

Art	Watt	Type of light source	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
491	-	E27	-	-	-	-	-	
4124*	17,5W	LED	1392 lm	3000K	50 000h	On/off	-	
4126*	19,4W	LED	2000 lm	3000K	>120 000h	DALI2	IESNA Type VS	PRO
492	-	2 x E27	-	-	-	-	-	
4128*	35W	2 x LED	2784 lm	3000K	50 000h	On/off	-	
4130*	38,8W	2 x LED	4000 lm	3000K	>120 000h	DALI2	IESNA Type VS	PRO
495	-	3 x E27	-	-	-	-		
4132*	52,5W	3 x LED	4176 lm	3000K	50 000h	On/off	-	
4134*	58,2W	3 x LED	6000 lm	3000K	>120 000h	DALI2	IESNA Type VS	PRO
483	-	3 x E27	-	-	-	-	-	
482	-	2 x E27	-	-	-	-	-	


Accessories London

305	Concreting anchor	p.131
306	Anchoring support	p.131
3010	Pole	p.129
30101	Pole	p.129


*London LED with 2700/4000K available by request, contact your supplier.




Art. 491, 4124, 4126




Art. 492, 4128, 4130




Art. 483



Art. 482



Art. 495, 4132*, 4134*





MODENA




BLACK WHITE CE 220-240V 50-60Hz IP 54 E27


MODENA Aluminium powder coated fixtures with clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
300	-	II	E27	Clear	-
384	-	II	E27	Clear	-
304	-	II	E27	Clear	-


Accessories	Modena	
307	Concreting anchor	p. 131



Art. 300



Art. 384



Art. 304




MODENA Aluminium powder coated fixtures with clear polycarbonate diffuser.

Art	Watt	Class	Type of light source	Diffuser: PC	Light control
301	-	II	E27	Clear	-
382	-	II	2xE27	Clear	-
303	-	II	3xE27	Clear	-
302	-	II	2xE27	Clear	-
397	-	II	3xE27	Clear	


Accessories Modena

305	Concreting anchor	p. 131
306	Anchoring support	p. 131
3010	Pole	p. 129
30101	Pole	p. 129




Art. 301


Art. 382




Art. 397

Pole foot:





Art. 303



Art. 302

COMO










BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27

COMO Aluminium powder coated fixtures with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Version
375	-	II	E27	Clear	Pillar
371	-	II	E27	Clear	Pole
372	-	II	2xE27	Clear	Pole
373	-	II	3xE27	Clear	Pole


Accesories Como			
305	Concreting anchor	for Art. 371, 372, 373	p. 131
306	Anchoring support	for Art. 371, 372, 373	p. 131
3010	Pole		p. 129
30101	Pole		p. 129
307	Concreting anchor	for Art. 375	p. 131




Art. 375

Pole foot: Art. 371, 372 i 373






Art. 371



Art. 372



Art. 373

FIRENZE




BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

FIRENZE Aluminium powder coated fixtures with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Version
805	-	II	E27	Clear	Pillar
810	-	II	E27	Clear	Pole
820	-	II	2xE27	Clear	Pole
830	-	II	3xE27	Clear	Pole


ACCESSORIES FIRENZE			
305	Concreting anchor	for Art. 810, 820, 830	p. 131
306	Anchoring support	for Art. 810, 820, 830	p. 131
3010	Pole		p. 129
30101	Pole		p. 129
307	Concreting anchor	for Art. 805	p. 131




Art. 805

Pole foot: Art. 810, 820 i 830






Art. 810



Art. 820



Art. 830

RIMINI/MILANO




BLACK WHITE CE 220-240V 50-60Hz IP 54 E27

RIMINI/MILANO Aluminium powder coated fixtures with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Version
250	-	II	E27	Clear	Pedestal
404	-	II	E27	Clear	Pillar
401	-	II	E27	Clear	Pole
402	-	II	2xE27	Clear	Pole
403	-	II	3xE27	Clear	Pole

Accessories Rimini/Milano


405	Concreting anchor	for Art. 401, 402, 403	p. 131
406	Anchoring support	for Art. 401, 402, 403	p. 131
307	Concreting anchor	for Art. 250, 404	p. 131




Art. 250




Art. 404



Art. 401



Art. 402



Art. 403



CHELSEA






NEW


COPPER | CE | 220-240V 50-60Hz | IP 44 | E27

CHELSEA Handmade copper fixtures heads. Supplied with clear polycarbonate diffuser.


Art	Watt	Class	Type of light source	Diffuser: PC	Version
940	-	II	E27	Clear	Pillar
941	-	II	E27	Clear	Pillar
956	-	II	E27	Clear	Pedestal
957	-	II	E27	Clear	Pedestal
951	-	II	E27	Clear	Pole
953	-	II	2xE27	Clear	Pole
Accessories Chelsea					
305	Concreting anchor			for Art. 951, 953	p. 131
306	Anchoring support			for Art. 951, 953	p. 131
307	Concreting anchor			for Art. 940, 941, 956, 957	p. 131




Art. 956




Art. 957




Art. 940



Art. 951



Art. 953



Art. 941

BOLOGNA










BLACK | WHITE | CE | 220-240V 50-60Hz | IP 54 | E27

BOLOGNA Aluminium powder coated fixtures with clear or opal PMMA diffuser.


Art	Watt	Class	Type of light source	Diffuser	Version
312	-	II	E27	Clear	Pedestal
313	-	II	E27	Opal	Pedestal
314	-	II	E27	Clear	Pillar
315	-	II	E27	Opal	Pillar
362	-	II	2xE27	Clear	Pole
363	-	II	2xE27	Opal	Pole
364	-	II	3xE27	Clear	Pole
365	-	II	3xE27	Opal	Pole

ACCESSORIES BOLOGNA


305	Concreting anchor	for Art. 362, 363, 364, 365	p. 131
306	Anchoring support	for Art. 362, 363, 364, 365	p. 131
307	Concreting anchor	for Art. 312, 313, 314, 315	p. 131




Art. 312
Art. 313



Art. 314
Art. 315




Art. 362
Art. 363



Art. 364
Art. 365

Pole foot: Art. 362 - 365



NEW


Art. 3004



Art. 1275



Art. 1273



Art. 3009



Art. 3011



Art. 3010 / 30101
















POLES as accessories.

Art	Color	ø mm	Info
1273	Aluminium, Graphite	ø50mm	Made of aluminium, for painted fittings.
1275	Aluminium, Graphite	ø50mm	Made of aluminium, for painted fittings.
3009	Galvanized	ø50mm	Made of steel, for galvanized fittings.
3010	Black, White	ø50mm	Made of aluminium, for classic fittings.
30101	Black, White	ø50mm	Made of aluminium, for painted fittings.
3011	Black,	ø50mm	Made of aluminium, for painted fittings.
3004	Aluminium, Graphite	ø76mm	Made of aluminium, for painted fittings.


For luminaires: VISBY, BORG, HAMMERFEST, NICE and KOSTER. For public use, parks, parking lots.




Art. 1275



Art. 1273



Art. 3009



Art. 3011

Accessories


305	Concreting anchor	For Art. 3010 and 30101	p. 131
306	Anchoring support	For Art. 3010 and 30101	p. 131
405	Concreting anchor	For Art. 1273, 3009 and 3011	p. 131
406	Anchoring support	For Art. 1273, 3009 and 3011	p. 131
7660	Adapter Ø60 for Ø76 pole (short version)	For Art. 3004	p. 130
7661	Electric box	For Art. 3004	p. 130
7662	Electric box (EK 480 G1S-2D)	For Art. 3004	p. 130
7664	Concrete foundation	For Art. 3004	p. 130
7665	Adapter Ø60 for Ø76 pole (long version)	For Art. 3004	p. 130




Art. 3010




Art. 30101




Art. 3004




Art. 3060
Reduction for ø50 fittings for mounting on Ø60 pole




Art. 3061
Reduction for luminaires Art. 3012, 4012 for mounting on Ø60 pole




Art. 3070
Reduction for Ø60 fittings for mounting on Ø50 pole




Art. 159
Spacer
Art: 230
Art: 240
Art: 270
Art: 280, 286
Art. 290
Art: 690
Art: 1920




Art. 3080
Adapter
Halmstad
Alta
Stockholm
Oppland
Scandinavian wood
Lillesand




Art. 150
Corner bracket
Art: 259, 2591




Art. 152
Corner bracket
Art: 310, 311, 360, 361
Art: 350, 351, 380, 381
Art: 370
Art. 480, 481, 490, 493
Art: 800
Art 954, 960




Art. 153
Corner bracket
Art: 230
Art: 240
Art: 270
Art: 280, 286
Art. 290
Art: 690
Art: 1920




Art. 154
Arm for wall
Art: 576, 577
Art: 777
Art. Borg
Art. Hammerfest




Art. 155
Corner bracket
Art: 1943




Art. 158
Corner bracket
Art: 724, 725, 1912




Art. 7660
Reduction for Ø60 fittings for mounting on Ø76 pole, to be used with Visby, Koster




Art. 7661
Junction box with 5-way terminal block




Art. 7662
Electric box for pole Art. 3004 (EK 480 G1S-2D)




Art. 7664
Concrete foundation to be buried in the ground for pole Art. 3004




Art. 7665
Reduction for Ø60 fittings for mounting on Ø76 pole, to be used with Nice, Hammerfest




Art. 112
Concreting anchor
Art: 1931, 1932




Art. 113
Anchoring support
Art: 1931, 1932




Art. 116
Concreting anchor
Art: 1360, 1363




Art. 117
Anchoring support
Art: 1360, 1363




Art. 203
Concreting anchor
Art: 1561, 1566,
Borg Bollard




Art. 204
Anchoring support
Art: 1561, 1566




Art. 205
Concreting anchor
Art: 210, 211, 288, 289, 291, 293, 295, 296, 297, 298, 299, 1260, 1265, 1268, 1290, 1291, 1321, (1400- 1453)
1477, 1479, 1482, 1483,1488, 1488




Art. 206
Anchoring support
Art: 210, 211, 288, 289, 291, 293, 295, 296, 297 298, 299, 1260, 1265, 1268, 1290, 1291, 1321 (1400- 1453)
1477, 1479, 1482, 1483,1488, 1488




Art. 208
Concreting anchor
Art: 891, 893, 898, 899




Art. 305
Concreting anchor
Art: 301, 302, 303, 382
Art: 362, 363, 364, 365
Art: 371, 372, 373
Art: 482, 483, 493, 492
Art: 810, 820, 830
Art: 951, 953




Art. 306
Anchoring support
Art: 301, 302, 303, 382
Art: 362, 363, 364, 365
Art: 371, 372, 373
Art: 482, 483, 493, 492
Art: 810, 820, 830
Art: 951, 953




Art. 307
Concreting anchor
Art: 300, 304, 384
Art: 312, 313, 314, 315
Art: 484, 485, 494
Art: 805
Art: 956, 957




Art. 405
Concreting anchor
Art: 242
Art: 274, 275
Art: 281, 283
Art: 401, 402, 403
Art: 1914
Lofoten




Art. 406
Anchoring support
Art: 242
Art: 274, 275
Art: 281, 283
Art: 401, 402, 403
Art: 1914




Art. 505
Concreting anchor
Art: 557




Art. 1230
Concreting anchor
Art: 1240, 1243, 1244, 1246, 1248, 1248
Art: 1280, 1285




Art. 1231
Anchoring support
Art: 1240, 1243, 1244, 1246, 1248, 1248
Art: 1280, 1285




Art. 1907
Concreting anchor
Art: 1311, 1312
Art: 1901




Art. 1908
Anchoring support
Art: 1311, 1312
Art: 1901




Art. 6130
Concreting anchor
Art: 6105




Art. 130
Corner bracket
Mandal
Art: 1373, 1374




Art. 144
Hermetic junction box
Egersund Mini,
Lillesand, Oppland




Art. 148
Corner bracket
Sandvik
Art: 1730, 1731, 1732, 1740, 1741, 1742



Art. 149
Corner bracket
Mandal
Art: 1370, 1371



Art. 151
Corner bracket
Hitra



Art. 202
Anchoring support
Borg Bollard

Aluminium RAL 9006	Graphite RAL 7016	White RAL 9003	Galvanized Steel	Black RAL 9005	Copper	Stainless Steel	Green Patina	Copper Patina	Gold Patina

Patina is available only in the black color and at a surcharge of 10%. Colors are marked as non-standard for an additional 30% and with an extended delivery date.

The colors of the produced fittings may slightly differ from those presented in this catalog

Color temperature (Kalvin)

2700K 3000K 4000K

The photos in this catalog may not be copied without the consent of Norlys AS We reserve the right to change the characteristics of the models without notice and obligation, depending on our technical requirements and/or in order to improve the parameters of the products.



NORLYS

Norlys AS
P.B 1014 Hoff, 0218 Oslo
Havfaret 4B, 0275 Oslo

www.norlys.com
+47 24 12 40 10
firmapost@norlys.no

April 2022