


# NORLYS

# Explore our new color palette!

- **Copper Brown (CB)** RAL8004
- **Cement Grey (CG)** RAL7033
- **Coren Steel (CS)** approx. RAL8011
- **Beige Grey (GB)** RAL7006

For more information
visit our website
**norlys.com**

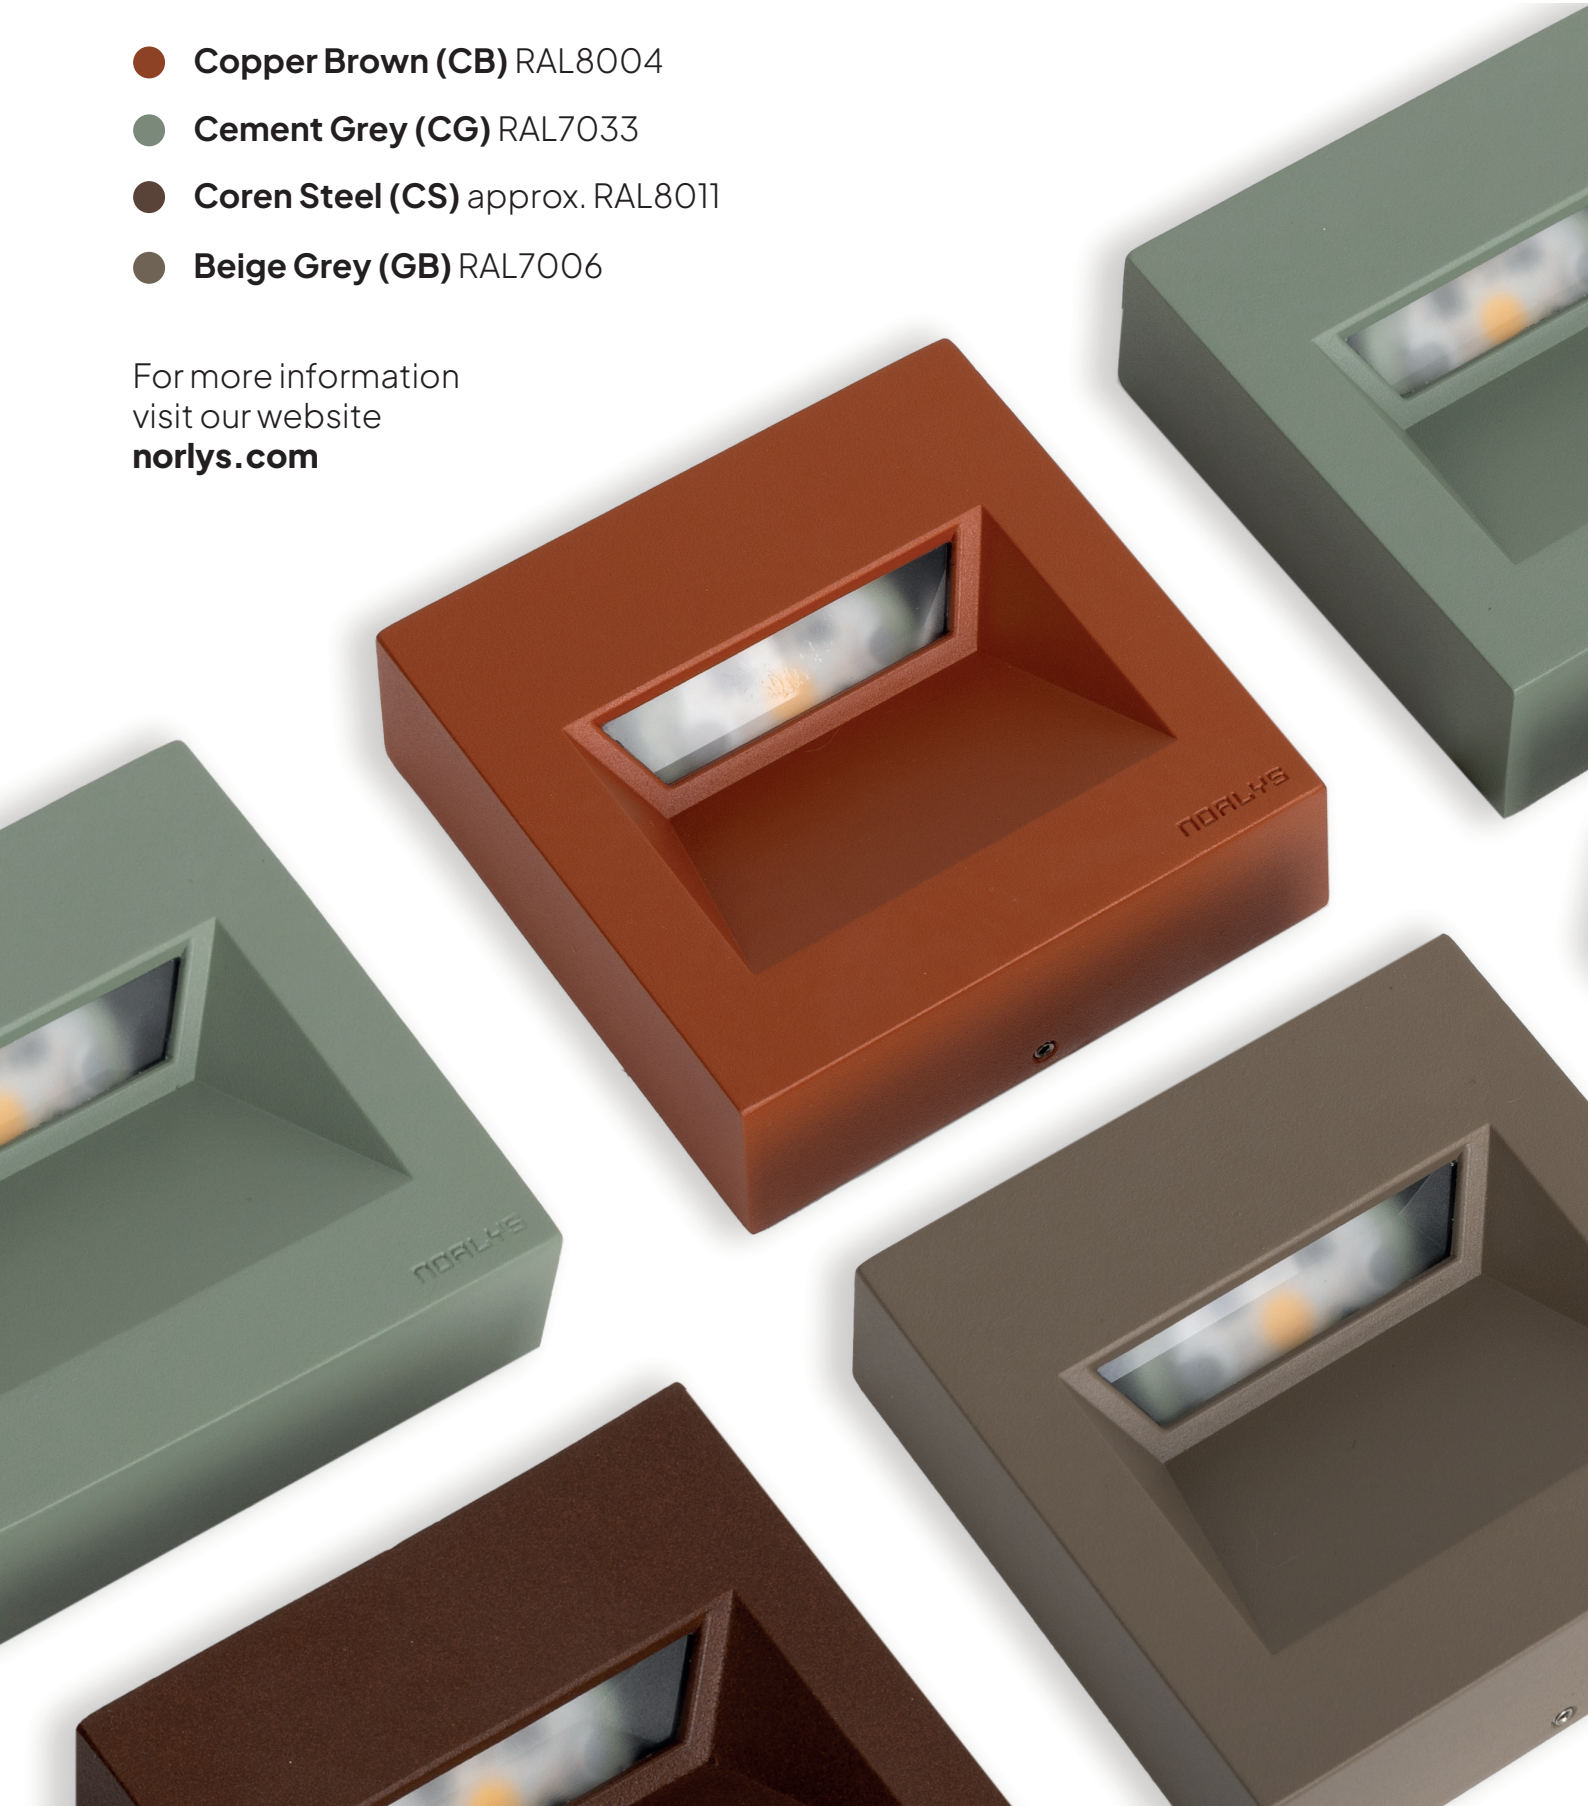

# Brightening your life with our passion for light

Inspired by the simplicity and timeless aesthetics of Scandinavian design, we draw from nature to craft lighting fixtures that exude elegance and sophistication. NORLYS products embody the core values of Scandinavian design, embracing minimalism, functionality and enduring beauty. With NORLYS, you can trust that our lighting solutions will effortlessly integrate into any space, elevating its ambiance and leaving a lasting impression.

**30 +** years on the market

**300 +** team members

**24** countries

**5 mln** unit sold

# We’re focused on our core values

At NORLYS, our values are at the core of everything we do. They shape our culture, inspire our actions, and drive our passion for delivering the best lighting solutions.
We believe that by upholding these values, we can make a positive impact on the world of lighting.



## For people

**We’re field experts who enjoy sharing knowledge and cherish long lasting customer relationships.**

Commitment to our Clients has been our path for years, and we tread it with confidence. We support with pre-sales advice and information, and we follow up after the purchase. They can count on our openness and professionalism. They can rely on us. We put the Clients at the center of everything we do. We strive to deeply understand their varied needs, to allay fears, and surpass expectations with a wide range of diverse and unique products and services tailored to individual needs.



## Responsibility

**We shape the world with gentle passion, showcasing its beauty in the finest light, because it deserves nothing less.**

We can’t operate any other way. We want to leave the world as we found it, with all its beauty and diversity. We responsibly use renewable resources, continuously improve energy-efficient production methods, and create top-quality luminaries with a minimal impact on the environment. Building a responsible and ethical company is a continuous, long-term effort on processes without compromises or half measures.



## Passion for light

**We focus on the future, emphasizing sustainability and our impact on future generations.**

We strive to create extraordinary places, providing unique lighting experiences. By combining cutting-edge innovations, professionalism, enthusiasm, and the experience of our team, we obtain a powerful tool. A tool for extracting the best qualities and meanings from spaces.
Our commitment to designing unique and practical lighting solutions enriches and invigorates space.

This catalogue is not a commercial offer and we reserve the right to make changes.

# Over 30 years of experience

NORLYS is the embodiment of the Scandinavian spirit. It was born in the frosty North in Norway, reflecting its simplicity, resilience, and naturalness. NORLYS is the answer to the long polar nights, the harshness of nature, and the need for safety. That is why we have been lighting spaces for 30 years. It is our passion and mission.

Today our main production plant and stock facilities are established in Poland and Sweden. We have our own aluminium foundry, a press department for the production of steel luminaires, and a hot-dip galvanising department. Apart from that, we have a machining department which includes CNC machining, a powder-coating department, and assembly departments. Our pride is our own Testing Laboratory equipped with specialised equipment of the highest class for the testing of luminaires. This lab performs measurements according to the requirements specific to ENEC and in accordance with the ISO 17025 standard.

We are an international company. Our subsidiaries located in Norway, Sweden, France, Italy and Poland are accompanied by an extensive worldwide sales network of professional distributors. This year, we are proud to announce that we have achieved the EcoVadis Bronze certification, reaffirming our commitment to sustainable development and corporate social responsibility.




Brand new production hall (1998)



Swedish warehouse (2011)




Die casting and tool shop (2011)



New warehouse and assembly (2015)

# How to read the catalogue?

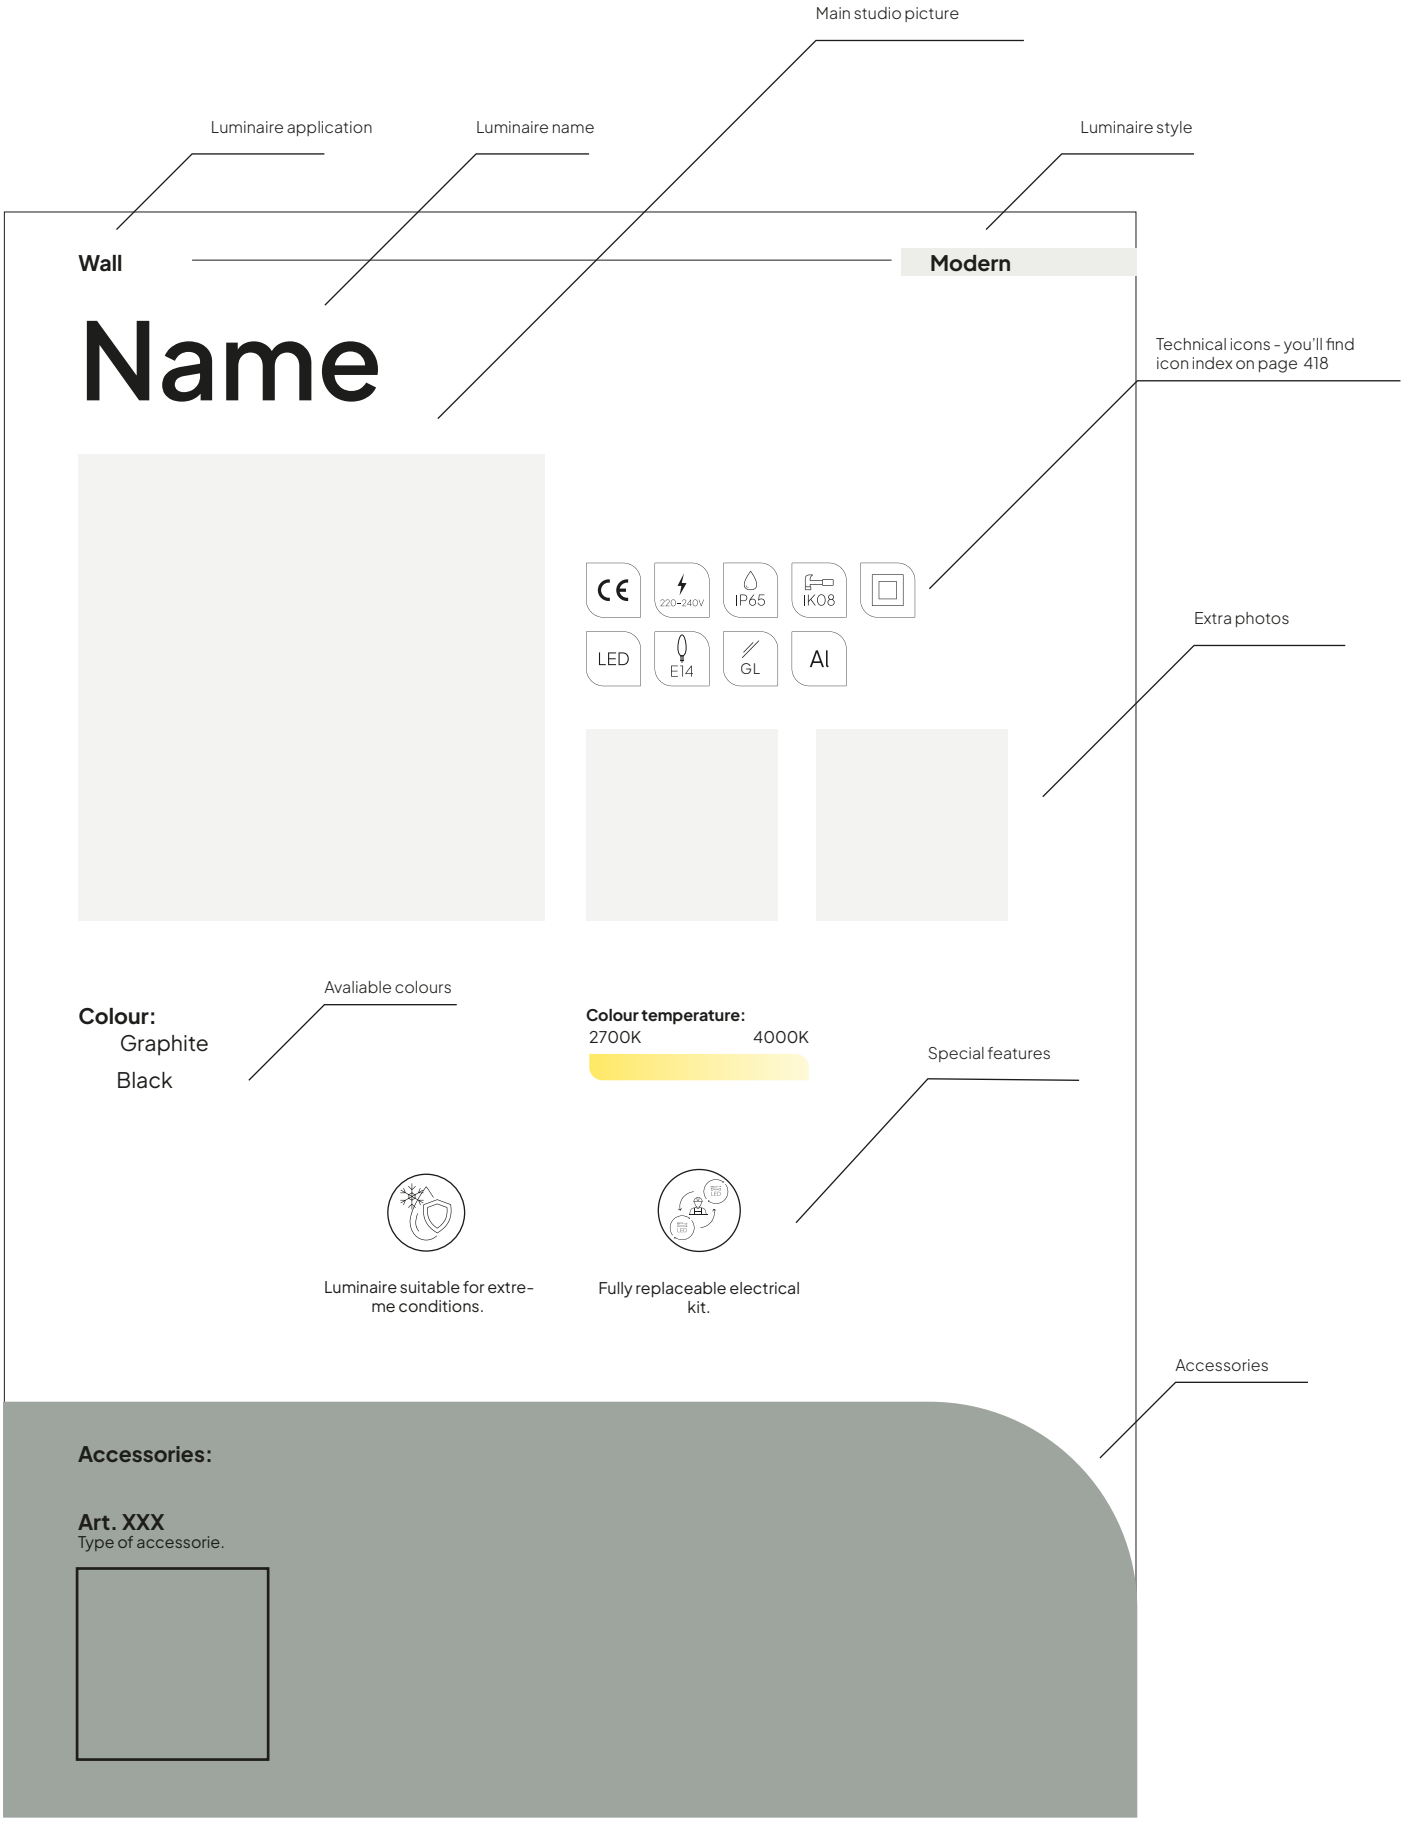

# Families


A p.47 Alta
p.19 Arendal
p.13 Arendal Mini
p.291 Arvika
p.23 Asker
p.43 Astrid
B p.295 Basel
p.235 Bergen
p.239 Berlin
p.299 Bern
p.303 Boden
p.344 Bologna
p.53 Borg
p.61 Bornholm
p.241 Bremen
C p.331 Chelsea
p.354 Como
E p.71 Egersund
p.65 Egersund Mini
p.73 Egersund Park
F p.361 Florence
p.243 Freja
p.79 Frigga
G p.83 Geneva
p.369 Genoa
p.371 Glasgow
p.85 Grimstad
H p.97 Halden
p.87 Halmstad
p.109 Hammerfest
p.99 Hellvik
p.105 Hitra
K p.307 Karlstad
p.111 Kisa
p.115 Koster
L p.258 Larvik
p.391 Latina
p.125 Lillehammer
p.129 Lillesand
p.245 Lofoten
p.373 London
p.312 Lund
p.131 Lysfjord
M p.317 Mandal
p.411 Milano
p.393 Modena
p.136 Molde
p.141 Mora
p.143 Moss
N p.165 Namsos
p.161 Narvik
p.177 Nice
p.159 Nidaros
p.152 Nora
p.155 Nordland
O p.179 Oppland
p.260 Oslo
P p.321 Paris
p.415 Poles
p.413 Power Distributor
R p.185 Rena
p.407 Rimini
p.193 Rondane
S p.201 Sande
p.195 Sandvik
p.326 Ski
p.198 Skara
p.203 Sol
p.207 Stavanger
p.268 Stockholm
T p.223 Trysil
p.329 Vansbro
V p.215 Vasa
p.405 Venice
p.221 Varberg
p.217 Visby
p.211 Voss


Modern
Classic
Industrial
Loft

# Wall


Arendal  p.15

Asker  p.25

Asker Big  p.29

Basel  p.295

Bergen  p.235

Berlin  p.238

Bern  p.299


Boden  p.303


Bologna  p.344

Borholm  p.61

Bremen  p.241

Chelsea  p.333

Chelsea  p.333

Chelsea  p.335

Chelsea Big  p.335

Como  p.354

Florence  p.361

Freja  p.243

Geneva  p.83


Genoa  p.369


Genoa Mini  p.369

Glasgow  p.371


Halden  p.97

Hitra  p.105


Karlstad  p.307


Koster  p.117


Larvik  p.258


Latina  p.391


Lillehammer  p.125

Lofoten  p.245

Lofoten  p.247

London  p.373

London  p.378

London Big  p.375

Lund  p.312

Lysfjord  p.131

Mandal  p.317

Mandal  p.317

Modena  p.393

Modena Big  p.393

Modena Big  p.393

Molde  p.136

Namsos  p.166

Nora  p.152

Nordland  p.155

Oslo  p.260

Paris  p.323

Paris Big  p.325

Rimini  p.408

Rondane  p.193

Sandvik  p.195

Sandvik  p.195

Ski  p.326

Stockholm  p.268

Stockholm  p.271

Stockholm Big  p.271

Vansbro  p.329

Vasa  p.215

Venice  p.405

Voss  p.211


# Bollard


Alta  p.47

Alta  p.47

Alta  p.51

Alta  p.51

Arendal  p.19

Arendal  p.19

Arendal  p.19

Arendal Mini  p.17

Arendal Mini  p.17

Arvika  p.29`

Arvika  p.29`

Asker  p.33

Asker  p.33

Astrid  p.43

Bologna  p.347

Bologna  p.347

Borg  p.55

Borg  p.55

Borg  p.55

Borg  p.55

Chelsea  p.339

Chelsea  p.339

Chelsea Big  p.339

Chelsea Big  p.339

Como  p.356

Egersund  p.71

Egersund  p.71

Egersund Mini  p.65

Egersund Mini  p.65

Egersund Park  p.74

Egersund Park  p.74

Florence  p.364

Frigga  p.79

Frigga  p.79

Halmstad  p.87

Halmstad  p.87

## Index


Halmstad  p.87

Halmstad  p.93

Halmstad  p.93

Hellvik  p.99

Hellvik  p.99

Kisa  p.111

Lillesand  p.129


Lillesand  p.129

Lofoten  p.253

Lofoten  p.255

London  p.383

London  p.383

London Big  p.383

Modena  p.397

Modena  p.397

Modena Big  p.397

Molde  p.139

Molde  p.139


Namsos  p.169


Namsos  p.169

Narvik  p.161

Oppland  p.179


Oslo  p.263


Rimini  p.407


Rimini  p.407


Skara  p.198

Stavanger  p.207

Stavanger  p.207

Stavanger  p.211

Stockholm  p.275

Stockholm  p.275

Stockholm  p.275

Stockholm  p.279

Stockholm  p.279

Stockholm  p.283

Stockholm  p.283

Stockholm Big  p.287

Trysil  p.225

# Pole


Asker

p.37

Asker

p.41

Bologna

p.351

Borg

p.59

Chelsea

p.342

Como

p.359

Egersund Park

p.77

Florence

p.366

Hammerfest

p.109

Karlstad

p.310

Koster

p.121

Lofoten

p.256

London

p.387

London Big

p.387

Lund

p.315

Milano

p.411

Modena

p.401

Modena Big

p.403

Mora


p.141

Nice

p.177

Oslo

p.265

Poles

p.415

Rimini

p.411

Visby

p.217

Stockholm Big

p.287

Trysil

p.227


# Electrical equipment


Power Distributor

p.413

Power Distributor

p.413

# Ceiling


Bergen

p.236

Bornholm

p.59

Chelsea

p.341

Florence

p.363

Hitra

p.107

Karlstad

p.308

Latina

p.395

Lofoten

p.250

Lofoten

p.250

Lofoten

p.251

London

p.381

London Big

p.380

Modena

p.395

Modena Big

p.395

Nidaros

p.159

Nidaros

p.159

Nidaros

p.159

Nordland

p.159

Oslo

p.267

Rondane

p.197

Sandvik

p.197

Sol

p.203


# Recessed & Spot


Grimstad

p.85

Grimstad

p.85

Moss

p.145

Moss

p.147

Moss

p.147

Moss


p.148

Moss

p.148


Moss

p.150

Moss

p.150

Namsos

p.173

Namsos

p.173

Namsos Mini

p.174

Rena

p.185

Rena Cover

p.189

Sande

p.201

Varberg

p.221

# Arendal Mini

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. In a modern design combining crystal with steel, the Arendal Mini will work well in a wide variety of space settings. The soft, harmonious light filtered through the satin-finished glass will introduce a pleasant atmosphere wherever it is used. The wall version of the lamp, made of aluminium, will be perfect as entrance lighting.





# Arendal Mini





**Colour:**

- Graphite
- Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Fully replaceable electrical kit.

Product Eco-friendly.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light Control |
|---|---|---|---|---|---|---|
| 1251BL | LED | 4W | 330lm | 3000K | > 50 000h | Dimmable |
| 1251GR | | | | | | |
| 1252BL | | | | 4000K | | |
| 1252GR | | | | | | |
| 1250BL | E14 | - | - | - | - | - |
| 1250GR | | | | | | |



# Arendal Mini







**Colour:**

Graphite
Galvanized
Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Double corrosion protection (galvanising+powder coating).


Product Eco-friendly.

**Accessories:**

**Art. 204**
Ground anchor.




**Art. 203**
Concreting anchor.



IP65 IK08 DIM LED Fe GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1566BL | LED | 4W | 330 lm | 3000K | >50 000h | Dimmable |
| 1566GA | | | | | | |
| 1566GR | | | | | | |
| 1567BL | | | 345 lm | 4000K | | |
| 1567GA | | | | | | |
| 1567GR | | | | | | |

IP65 IK08 DIM LED Fe GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1561BL | LED | 4W | 330 lm | 3000K | >50 000h | Dimmable |
| 1561GA | | | | | | |
| 1561GR | | | | | | |
| 1562BL | | | 345 lm | 4000K | | |
| 1562GA | | | | | | |
| 1562GR | | | | | | |



# Arendal


Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. Three different heights make it easier to choose the right lamp for the garden path, driveway, terrace or house access. The effect will be even more intriguing when used together in the arragemnt. The crystal shade used in the luminaire, additionally satin-finished on the inside, provides a gentle beam of light. Arendal is modern elegance and this design never gets old.





# Arendal



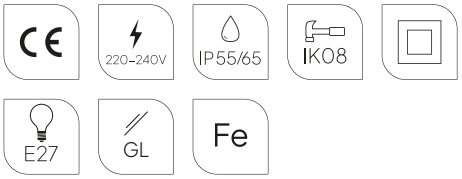






**Colour:**

Graphite
Galvanized
Black

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).




Fully replaceable electrical kit.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP55/65 IK08 E27 Fe GL




| Art | Type of light source |
|---|---|
| 1560BL | E27 |
| 1560GA | |
| 1560GR | |

IP55/65 IK08 E27 Fe GL




| Art | Type of light source |
|---|---|
| 1565BL | E27 |
| 1565GA | |
| 1565GR | |

IP55/65 IK08 E27 Fe GL




| Art | Type of light source |
|---|---|
| 1569BL | E27 |
| 1569GA | |
| 1569GR | |





# Asker


Modern buildings need new solutions. The modern Asker luminaire family is ideally suited to this. Unconventional, minimalist lamps work well on a concrete or brick façade. But of course not only. The minimalist design makes it possible to match them to many variants of wall finishes, and the durable and proven materials used in the lamps guarantee many years of trouble-free use in difficult weather conditions. The lamps are also available in bollard and pole versions. The bold yet simple shapes have always been and will continue to be attractive to professional designers and individual investors alike.





# Asker



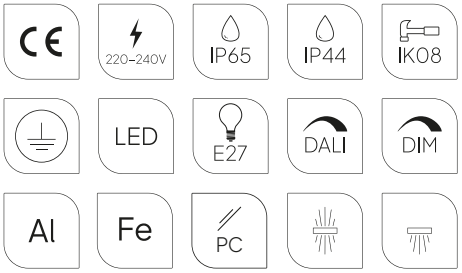






**Colour:**

Graphite
Aluminium
Galvanized
Black
White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Multiple light variants.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).







IP65 IK08 LED E27 DALI DIM Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1510AL | LED | 8,8W | 312lm | 3000K | 50 000h | Dimmable |
| 1510BL | | | | | | |
| 1510GR | | | | | | |
| 1510WH | | | | | | |
| 5102AL | | | 329lm | 4000K | | |
| 5102BL | | | | | | |
| 5102GR | | | | | | |
| 5102WH | | | | | | |
| 1720AL | | 8,4W | 798lm | 3000K | >70 000h | |
| 1720BL | | | | | | |
| 1720GR | | | | | | |
| 1720WH | | | | | | |
| 5150AL | | 8,3W | 901lm | 4000K | | |
| 5150BL | | | | | | |
| 5150GR | | | | | | |
| 5150WH | | | | | | |
| 5160AL | | 9,9W | | | | DALI2 |
| 5160BL | | | | | | |
| 5160GR | | | | | | |
| 5160WH | | | | | | |
| 1721AL | | | 852lm | 3000K | | |
| 1721BL | | | | | | |
| 1721GR | | | | | | |
| 1721WH | | | | | | |
| 1513AL | E27 | - | - | - | - | - |
| 1513BL | | | | | | |
| 1513GR | | | | | | |
| 1513WH | | | | | | |

IP44 IK08 LED E27 DIM Fe PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1700GA | LED | 8,4W | 360lm | 3000K | 50 000h | Dimmable |
| 5100GA | | | 367lm | 4000K | | |
| 1702GA | E27 | - | - | - | - | - |

IP65 IK08 LED E27 DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1511AL | LED | 8.8W | 156lm | 3000K | 50 000h | Dimmable |
| 1511BL | | | | | | |
| 1511GR | | | | | | |
| 1511WH | | | | | | |
| 5103AL | | | 164lm | 4000K | | |
| 5103BL | | | | | | |
| 5103GR | | | | | | |
| 5103WH | | | | | | |
| 1726AL | | 5,4W | 429lm | 3000K | 70 000h | DALI2 |
| 1726BL | | | | | | |
| 1726GR | | | | | | |
| 1726WH | | | | | | |
| 5151AL | | | 444lm | 4000K | | |
| 5151BL | | | | | | |
| 5151GR | | | | | | |
| 5151WH | | | | | | |
| 5157AL | | 5,5W | 465lm | | | |
| 5157BL | | | | | | |
| 5157GR | | | | | | |
| 5157 WH | | | | | | |
| 1727AL | | | 426lm | 3000K | | |
| 1727BL | | | | | | |
| 1727GR | | | | | | |
| 1727WH | | | | | | |
| 1514AL | E27 | - | - | - | - | - |
| 1514BL | | | | | | |
| 1514GR | | | | | | |
| 1514WH | | | | | | |

IP44 IK08 LED E27 DIM Fe PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1705GA | LED | 8W | 165lm | 3000K | 50 000h | Dimmable |
| 5101GA | | | 183lm | 4000K | | |
| 1707GA | E27 | - | - | - | - | - |



# Asker Big







**Colour:**

Graphite
Aluminium
Galvanized
Black
White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Multiple light variants.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



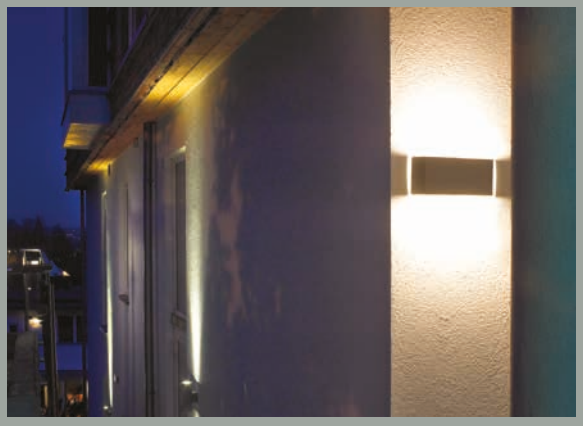

IP65 IK08 LED E27 DIM DALI Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1300AL | LED | 8,3W | 547lm | 3000K | >72 000h | Dimmable |
| 1300BL | | | | | | |
| 1300GR | | | | | | |
| 1300WH | | | | | | |
| 5080AL | | 19,4W | 1669lm | | > 70 000h | DALI2 |
| 5080BL | | | | | | |
| 5080GR | | | | | | |
| 5080WH | | | | | | |
| 5086AL | | 19,3W | 1942lm | 4000K | | |
| 5086BL | | | | | | |
| 5086GR | | | | | | |
| 5086WH | | | | | | |
| 5018AL | | 8,5W | 550lm | | | Dimmable |
| 5018BL | | | | | | |
| 5018GR | | | | | | |
| 5018WH | | | | | | |
| 1306AL | | 13,7W | 1280lm | 3000K | | |
| 1306BL | | | | | | |
| 1306GR | | | | | | |
| 1306WH | | | | | | |
| 5105AL | | | 1313lm | 4000K | | |
| 5105BL | | | | | | |
| 5105GR | | | | | | |
| 5105WH | | | | | | |
| 1303AL | E27 | - | - | - | - | - |
| 1303BL | | | | | | |
| 1303GR | | | | | | |
| 1303WH | | | | | | |

IP44 IK08 LED E27 DIM Fe PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1710GA | LED | 7,1W | 649lm | 3000K | 70 000h | Dimmable |
| 1712GA | E27 | - | - | - | - | - |

IP65 IK08 LED E27 DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1302AL | LED | 5,2W | 306lm | 3000K | >70 000h | Dimmable |
| 1302BL | | | | | | |
| 1302GR | | | | | | |
| 1302WH | | | | | | |
| 5104AL | | | 362lm | 4000K | | |
| 5104BL | | | | | | |
| 5104GR | | | | | | |
| 5104WH | | | | | | |
| 5106AL | | 13,6W | 656lm | | | |
| 5106BL | | | | | | |
| 5106GR | | | | | | |
| 5106WH | | | | | | |
| 1308AL | | 8,4W | 732lm | 3000K | >72 000h | |
| 1308BL | | | | | | |
| 1308GR | | | | | | |
| 1308WH | | | | | | |
| 5085AL | | 10,2W | 843lm | | | DALI2 |
| 5085BL | | | | | | |
| 5085GR | | | | | | |
| 5085WH | | | | | | |
| 5087AL | | | 960lm | 4000K | >70 000h | |
| 5087BL | | | | | | |
| 5087GR | | | | | | |
| 5087WH | | | | | | |
| 1305AL | E27 | - | - | - | - | - |
| 1305BL | | | | | | |
| 1305GR | | | | | | |
| 1305WH | | | | | | |

IP44 IK08 LED E27 DIM Fe PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1717GA | E27 | - | - | - | - | - |
| 1715GA | LED | 5,3W | 347lm | 3000K | 70 000h | Dimmable |



# Asker Bollard







**Colour:**

Graphite
Aluminium
Black

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**
Concreting anchor




**Art. 1908**
Ground anchor




IP65 IK08 IK10 LED DALI DIM Al PMMA PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens | IK |
|---|---|---|---|---|---|---|---|---|
| 1311AL | LED | 9,5W | 585lm | 3000K | 50 000h | - | - | IK10 |
| 1311BL | | | | | | | | |
| 1311GR | | | | | | | | |
| 1314AL | | 7,7W | 697lm | | > 109 000h | Dimmable | IESNA type II/III | IK08 |
| 1314BL | | | | | | | | |
| 1314GR | | | | | | | | |
| 1315AL | | 7,8W | 683lm | | | DALI2 | | |
| 1315BL | | | | | | | | |
| 1315GR | | | | | | | | |
| 1316AL | | 7,7W | 604lm | | | Dimmable | IESNA type V | |
| 1316BL | | | | | | | | |
| 1316GR | | | | | | | | |
| 1317AL | | 7,8W | 599lm | | | DALI2 | | |
| 1317BL | | | | | | | | |
| 1317GR | | | | | | | | |
| 1318AL | | 7,7W | 724lm | 4000K | | Dimmable | IESNA type II/III | |
| 1318BL | | | | | | | | |
| 1318GR | | | | | | | | |
| 1319AL | | 7,8W | 706lm | | | DALI2 | | |
| 1319BL | | | | | | | | |
| 1319GR | | | | | | | | |
| 1320AL | | 7,7W | 617lm | | | Dimmable | IESNA type V | |
| 1320BL | | | | | | | | |
| 1320GR | | | | | | | | |
| 1322AL | | 7,8W | 616lm | | | DALI2 | | |
| 1322BL | | | | | | | | |
| 1322GR | | | | | | | | |
| 5210AL | | 10W | 394lm | 3000K | > 55 000h | Dimmable | - | IK10 |
| 5210BL | | | | | | | | |
| 5210GR | | | | | | | | |
| 5211AL | | | 457lm | 4000K | | | | |
| 5211BL | | | | | | | | |
| 5211GR | | | | | | | | |

IP65 IK08 LED Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Motion Detector |
|---|---|---|---|---|---|---|
| 1338AL | LED | 9,7W | 585lm | 3000K | 50 000h | PIR |
| 1338BL | | | | | | |
| 1338GR | | | | | | |
| 1339AL | | | 640lm | 4000K | | |
| 1339BL | | | | | | |
| 1339GR | | | | | | |

IP65 IK08 IK10 LED DIM Al PC PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens | IK |
|---|---|---|---|---|---|---|---|---|
| 1310AL | LED | 9,5W | 585lm | 3000K | 50 000h | On/Off | - | IK10 |
| 1310BL | | | | | | | | |
| 1310GR | | | | | | | | |
| 5120AL | | | 636lm | 4000K | | | | |
| 5120BL | | | | | | | | |
| 5120GR | | | | | | | | |
| 5212AL | | 10W | 394lm | 3000K | > 55 000h | Dimmable | IESNA type II/III | IK08 |
| 5212BL | | | | | | | | |
| 5212GR | | | | | | | | |
| 5213AL | | | 458lm | 4000K | | | | |
| 5213BL | | | | | | | | |
| 5213GR | | | | | | | | |
| 5214AL | | 7,7W | 682lm | 3000K | >109 000h | | | |
| 5214BL | | | | | | | | |
| 5214GR | | | | | | | | |
| 5215AL | | | 654lm | 4000K | | | | |
| 5215BL | | | | | | | | |
| 5215GR | | | | | | | | |
| 5216AL | | | 604lm | 3000K | | | IESNA type V | |
| 5216BL | | | | | | | | |
| 5216GR | | | | | | | | |
| 5217AL | | | 654lm | 4000K | | | | |
| 5217BL | | | | | | | | |
| 5217GR | | | | | | | | |


IP65 IK08 LED Al PC





| Art | Type of light source | Watt | Luminous flux | Colour tempe-rature | L70/B50 | Motion Detector |
|---|---|---|---|---|---|---|
| 1336AL | LED | 9,7W | 585lm | 3000K | 50 000h | PIR |
| 1336BL | | | | | | |
| 1336GR | | | | | | |
| 1337AL | | | 636lm | 4000K | | |
| 1337BL | | | | | | |
| 1337GR | | | | | | |



# Asker Pole

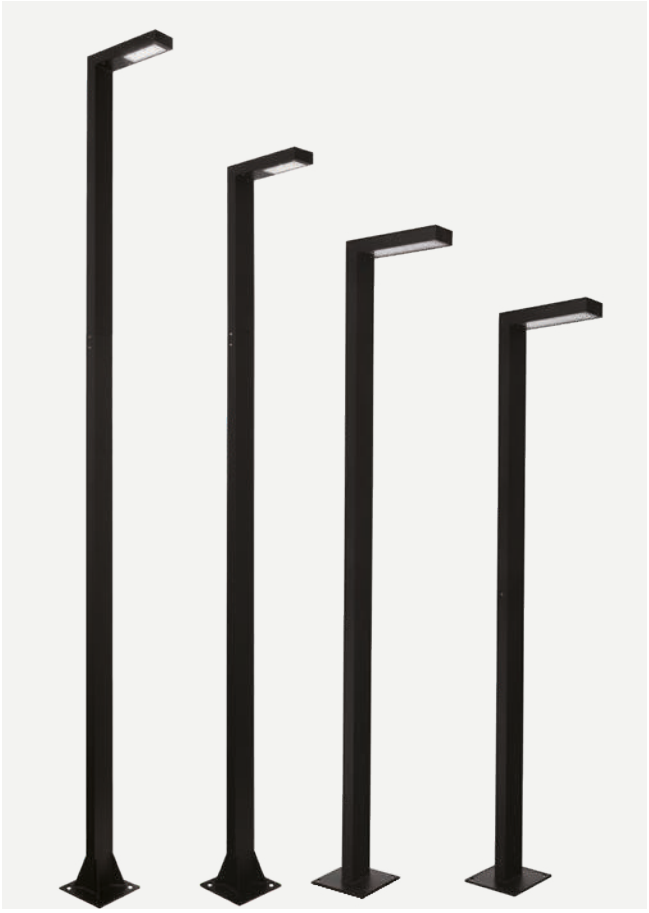

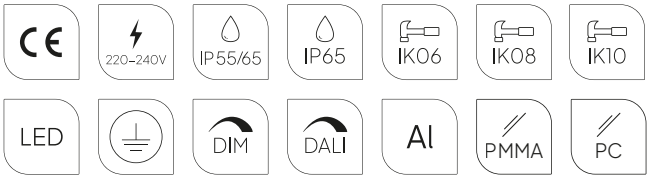







**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 116**
Concreting anchor
For 2160 & 2360 height





**Art. 117**
Anchoring support
For 2160 & 2360 height.




**Art. 3091**
Concreting anchor




IP65 IK08 IK10 LED DIM DALI Al PMMA PC

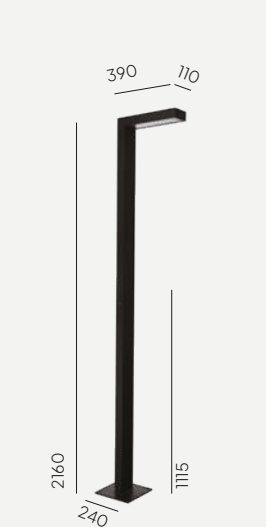


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1360AL | LED | 12 W | 1128lm | 3000K | >72 000h | Dimmable | - |
| 1360BL | | | | | | | |
| 1360GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions.


IP65 IK08 IK10 LED DIM DALI Al PMMA PC

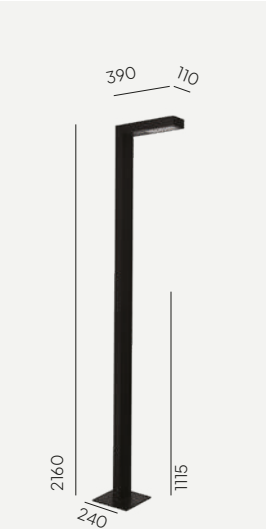


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1361AL | | 8,4W | 1081lm | | > 100 000h | - | IESNA type V |
| 1361BL | | | | | | | |
| 1361GR | | | | | | | |
| 1362AL | | 8,5W | 1081lm | | | DALI2 / NightDim | |
| 1362BL | | | | | | | |
| 1362GR | | | | | | | |
| 1366AL | | 8,4W | 1018lm | | | - | IESNA type III |
| 1366BL | | | | | | | |
| 1366GR | | | | | | | |
| 1368AL | | 8,7W | 1018lm | | >120 000h | DALI2 / NightDim | |
| 1368BL | | | | | | | |
| 1368GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions.


IP65 IK06 LED DIM DALI Al PMMA

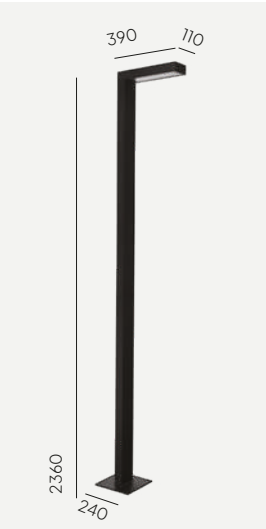


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1363AL | LED | 12W | 1128lm | 3000K | > 72 000h | Dimmable | - |
| 1363BL | | | | | | | |
| 1363GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions.


IP65 IK06 LED DIM DALI Al PMMA

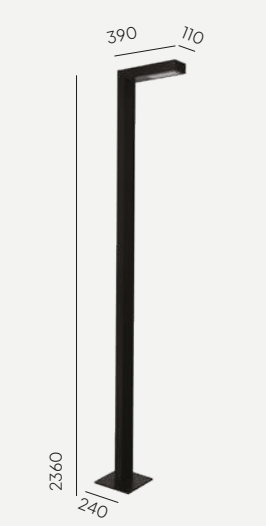


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1364AL | LED | 8,4W | 1033lm | 3000K | > 100 000h | - | IESNA type V |
| 1364BL | | | | | | | |
| 1364GR | | | | | | | |
| 1365AL | | 8,5W | 1085lm | | | DALI2 / NightDim | |
| 1365BL | | | | | | | |
| 1365GR | | | | | | | |
| 1367AL | | 8,4W | 1018lm | | | - | IESNA type III |
| 1367BL | | | | | | | |
| 1367GR | | | | | | | |
| 1369AL | | 8,7W | 1081lm | | > 120 000h | DALI2 / NightDim | |
| 1369BL | | | | | | | |
| 1369GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions.


IP65 IK06 LED DIM DALI Al PMMA

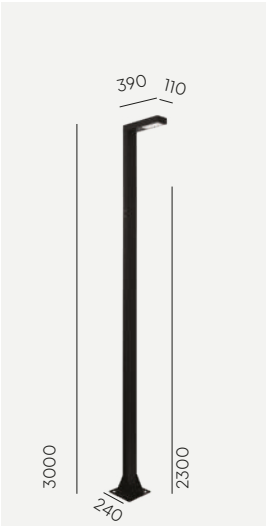


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 5222AL | LED | 19,5W | 2667lm | 3000K | > 120 000h | DALI2 / NightDim | IESNA type V |
| 5222BL | | | | | | | |
| 5222GR | | | | | | | |
| 5224AL | | | 2660lm | | >100 000h | Dimmable | |
| 5224BL | | | | | | | |
| 5224GR | | | | | | | |
| 5226AL | | | 2646lm | | | DALI2 / NightDim | IESNA type III |
| 5226BL | | | | | | | |
| 5226GR | | | | | | | |
| 5228AL | | 19,6W | 2666lm | | | Dimmable | |
| 5228BL | | | | | | | |
| 5228GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions.

IP65 IP55/65 IK06 LED DIM DALI Al PC

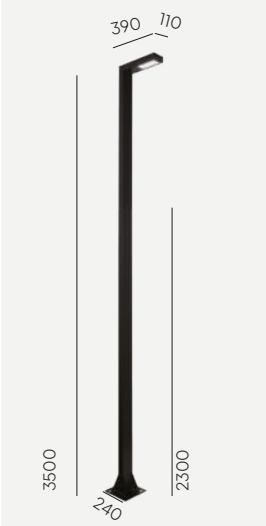


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens | IP |
|---|---|---|---|---|---|---|---|---|
| 5200AL | LED | 19,9W | 2620lm | 3000K | > 120 000h | DALI2 / NightDim | IESNA type V | IP55/65 |
| 5200BL | | | | | | | | |
| 5200GR | | | | | | | | |
| 5202AL | | 19,5W | 2660lm | | > 100 000h | Dimmable | | IP65 |
| 5202BL | | | | | | | | |
| 5202GR | | | | | | | | |
| 5204AL | | 19,9W | 2620lm | | > 120 000h | DALI2 / NightDim | IESNA type III | IP55/65 |
| 5204BL | | | | | | | | |
| 5204GR | | | | | | | | |
| 5206AL | | 19,6W | 2666lm | | > 100 000h | Dimmable | | IP65 |
| 5206BL | | | | | | | | |
| 5206GR | | | | | | | | |

*All indexes also available in 4000K and 2700K versions.

IP65 IK10 LED DALI Al PC 60*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 4322AL | LED | 19,5W | 2624lm | 3000K | >100 000h | DALI2 / NightDim | IESNA type II/III |
| 4322BL | | | | | | | |
| 4322GR | | | | | | | |
| 4323AL | | | 2742lm | 4000K | | | |
| 4323BL | | | | | | | |
| 4323GR | | | | | | | |
| 4362AL | | | 2711lm | 3000K | | | IESNA type V |
| 4362BL | | | | | | | |
| 4362GR | | | | | | | |
| 4363AL | | | 2832lm | 4000K | | | |
| 4363BL | | | | | | | |
| 4363GR | | | | | | | |

*Other two mounting options ø76mm and ø50mm available on request

IP65 IK10 LED DALI Al PC 60*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 4332AL | LED | 39,8W | 5457lm | 3000K | >100 000h | DALI2 / NightDim | IESNA type II/III |
| 4332BL | | | | | | | |
| 4332GR | | | | | | | |
| 4333AL | | | 5723lm | 4000K | | | |
| 4333BL | | | | | | | |
| 4333GR | | | | | | | |
| 4372AL | | | 5723lm | 3000K | | | IESNA type V |
| 4372BL | | | | | | | |
| 4372GR | | | | | | | |
| 4373AL | | | 6015lm | 4000K | | | |
| 4373BL | | | | | | | |
| 4373GR | | | | | | | |

*Other two mounting options ø76mm and ø50mm available on request


IP65 IK10 LED DALI Al PC 6m 60*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 4342AL | LED | 19,5W | 2624lm | 3000K | >100 000h | DALI2 / NightDim | IESNA type II/III |
| 4342BL | | | | | | | |
| 4342GR | | | | | | | |
| 4343AL | | | 2742lm | 4000K | | | |
| 4343BL | | | | | | | |
| 4343GR | | | | | | | |
| 4382AL | | | 2711lm | 3000K | | | IESNA type V |
| 4382BL | | | | | | | |
| 4382GR | | | | | | | |
| 4383AL | | | 2832lm | 4000K | | | |
| 4383BL | | | | | | | |
| 4383GR | | | | | | | |

*Other two mounting options ø76mm and ø50mm available on request

# Asker Head

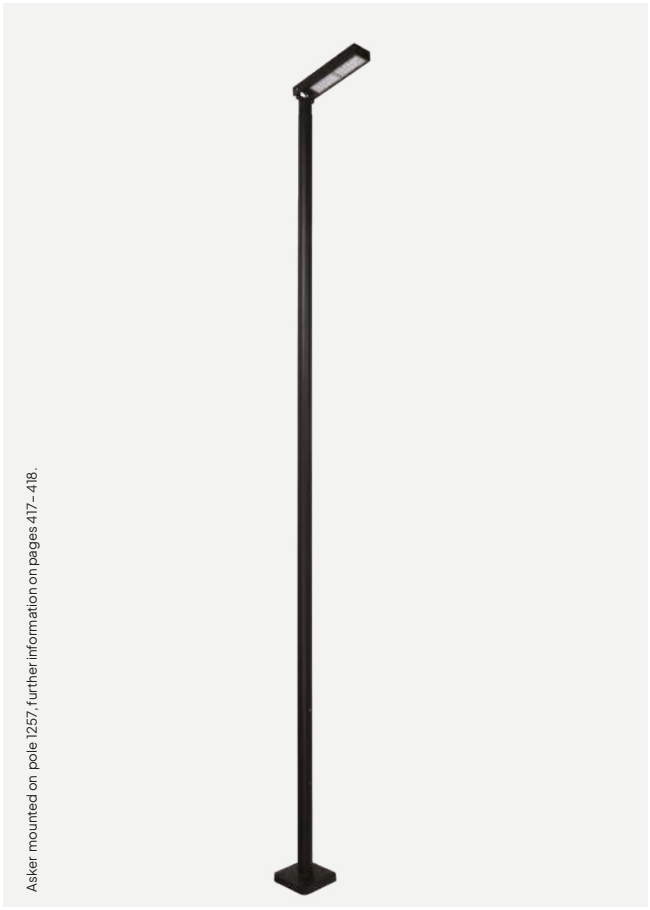

Asker mounted on pole 1257, further information on pages 417–418.



**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.

Wide range of light direction adjustment.

Product Eco-friendly.

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417– 418.

IP65 | IK10 | LED | DALI | Al | PC | 6m | ⌀60*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 4352AL | LED | 39,8W | 5457lm | 3000K | >100 000h | DALI2 / NightDim | IESNA type II/III |
| 4352BL | | | | | | | |
| 4352GR | | | | | | | |
| 4353AL | | | 5723lm | 4000K | | | |
| 4353BL | | | | | | | |
| 4353GR | | | | | | | |
| 4392AL | | | 5723lm | 3000K | | | IESNA type V |
| 4392BL | | | | | | | |
| 4392GR | | | | | | | |
| 4393AL | | | 6015lm | 4000K | | | |
| 4393BL | | | | | | | |
| 4393GR | | | | | | | |

*Other two mounting options ⌀76mm and ⌀50mm available on request



# Astrid

Astrid is a fixture that catches the eye with its elegance and refined details, designed for places where aesthetics go hand in hand with functionality.

Its name, derived from an Old Norse word meaning “divine beauty”, perfectly reflects the character of this luminaire – subtle yet expressive. The ribbed structure creates an intriguing play of light and shadow as the illumination gently shines through the vertical slats after dark. Astrid was created with elegant outdoor spaces in mind – from modern residential areas and green courtyards to public spaces. Available in a full range of colours, it fits seamlessly into its surroundings and highlights their character



IP65 IK10 LED DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2208AL | LED | 10,6W | 256lm | 3000K | > 100 000h | DALI2 |
| 2208GR | | | | | | |
| 2208BL | | | | | | |
| 2208WH | | | | | | |
| 2209AL | | | 271lm | 4000K | | |
| 2209GR | | | | | | |
| 2209BL | | | | | | |
| 2209WH | | | | | | |
| 2223AL | | 14,5W | 369lm | | | |
| 2223GR | | | | | | |
| 2223BL | | | | | | |
| 2223WH | | | | | | |
| 2222AL | | | 356lm | 3000K | | |
| 2222GR | | | | | | |
| 2222BL | | | | | | |
| 2222WH | | | | | | |
| 2212AL | | 10,4W | 256lm | | | Dimmbar |
| 2212GR | | | | | | |
| 2212BL | | | | | | |
| 2212WH | | | | | | |
| 2213AL | | | 256lm | 4000K | | |
| 2213GR | | | | | | |
| 2213BL | | | | | | |
| 2213WH | | | | | | |
| 2226AL | | 14,6W | 377lm | | | |
| 2226GR | | | | | | |
| 2226BL | | | | | | |
| 2226WH | | | | | | |
| 2225AL | | | 362lm | 3000K | | |
| 2225GR | | | | | | |
| 2225BL | | | | | | |
| 2225WH | | | | | | |





# Astrid





220–240V IK10 IP65 LED DALI Al PMMA

**Colour:**

Black
Graphite
Aluminium
White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support





# Alta





**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP65 IK10 LED E27 Fe PMMA DIM





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 291BL | E27 | - | - | - | - | - |
| 291GA | | | | | | |
| 1475BL | LED E27 | 5,9W | 100lm | 2700K | 25 000h | Dimmable |
| 1475GA | | | | | | |
| 1479BL | LED | 8,5W | 146lm | 3000K | > 50 000h | |
| 1479GA | | | | | | |
| 5021BL | | | 151lm | 4000K | | |
| 5021GA | | | | | | |

IP65 IK10 LED E27 Fe PMMA DIM




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light Control |
|---|---|---|---|---|---|---|
| 293BL | E27 | - | - | - | - | - |
| 293GA | | | | | | |
| 1477BL | LED E27 | 5,9W | 100lm | 2700K | 25 000h | Dimmable |
| 1477GA | | | | | | |
| 1476BL | LED | 8,5 W | 146lm | 3000K | >50 000h | |
| 1476GA | | | | | | |
| 1468BL | | | 151lm | 4000K | | |
| 1468GA | | | | | | |



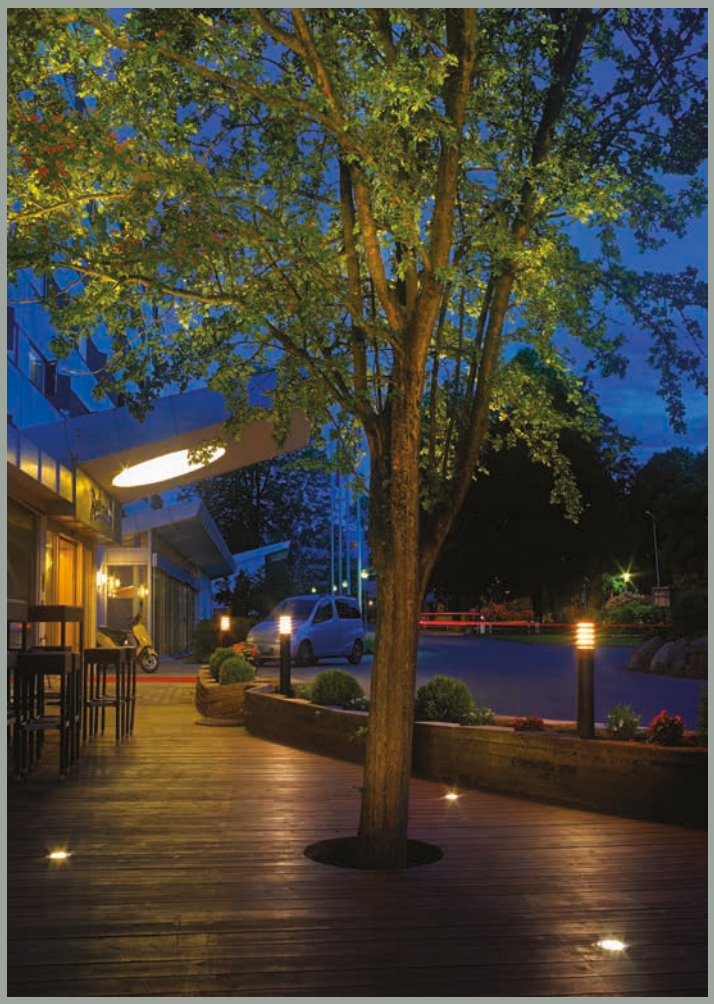





# Alta

scandinavian wood










**Colour:**

- Black
- Galvanized

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.

Luminaire housing made of natural wood.


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP65 IK10 E27 LED Fe DIM PMMA




| Art | Type of light source |
|---|---|
| 1440BL | E27 |
| 1440GA | |

IP65 IK10 E27 LED Fe DIM PMMA




| Art | Type of light source |
|---|---|
| 1450BL | E27 |
| 1450GA | |

IP65 IK10 E27 LED Fe DIM PMMA




| Art | Type of light source |
|---|---|
| 1443BL | E27 |
| 1443GA | |

IP65 IK10 E27 LED Fe DIM PMMA




| Art | Type of light source |
|---|---|
| 1453BL | E27 |
| 1453GA | |

# Borg

The Borg luminaires family is a prime example of top quality and modern design. Borg will prove ideal for designing modern solutions to enhance urban living comfort. The Borg will be a great complement to leisurely, plant-filled squares with benches, but it will also fit in well with the landscape of an ordinary street and completely change its look. For many people, the city is a place to work and live. Therefore, designing comfortable urban landscapes requires the right eye-catching lighting. The minimalist and functional Borg will bring a modern style to any urban space.




Photo: panoramahyttene.no
CABIN GUESTS ONLY

# Borg







**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 202**
Anchoring support




**Art. 203**
Concreting anchor



IP65 IK10 LED DIM DALI Al PMMA





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6190AL | LED | 16W | 1358lm | 3000K | > 72 000h | Dimmable |
| 6190GR | | | | | | |
| 6191AL | | | 1396lm | 4000K | | |
| 6191GR | | | | | | |
| 6192AL | | 17,6W | 1358lm | 3000K | | DALI2 / NightDim |
| 6192GR | | | | | | |
| 6193AL | | | 1396lm | 4000K | | |
| 6193GR | | | | | | |

IP65 IK10 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6180AL | LED | 16W | 1358lm | 3000K | > 72 000h | Dimmable |
| 6180GR | | | | | | |
| 6181AL | | | 1396lm | 4000K | | |
| 6181GR | | | | | | |
| 6183AL | | 15,9W | | | | DALI2 / NightDim |
| 6183GR | | | | | | |
| 6182AL | | 17,6W | 1358lm | 4000K | | |
| 6182GR | | | | | | |

IP65 IK10 LED DIM DALI AI




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6170AL | LED | 16W | 1358lm | 3000K | > 72 000h | Dimmable |
| 6170GR | | | | | | |
| 6171AL | | | 1396lm | 4000K | | |
| 6171GR | | | | | | |
| 6173AL | | 17,6W | | | | DALI2 / NightDim |
| 6173GR | | | | | | |
| 6172AL | | | 1358lm | 3000K | | |
| 6172GR | | | | | | |

IP65 IK10 LED DIM DALI AI




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6120AL | LED | 16,1W | 1358lm | 3000K | > 72 000h | Dimmable |
| 6120GR | | | | | | |
| 6121AL | | 16W | 1396lm | 4000K | | |
| 6121GR | | | | | | |
| 6123AL | | 17,2W | | | | DALI2 |
| 6123GR | | | | | | |
| 6122AL | | | 1358lm | 3000K | | |
| 6122GR | | | | | | |



# Borg



Borg mounted on pole 3004, details on pages 417–418.





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Product Eco-friendly.


**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417– 418.

**Art. 7660**
Adapter Ø60 for install on pole Ø76




**Art. 154**
Arm for use on wall



IP65 IK08 LED 6m Al PC DALI 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6150AL | LED | 32W | 3735lm | 3000K | > 72 000h | - |
| 6150GR | | | | | | |
| 5140AL | | | 3928lm | 4000K | | |
| 5140GR | | | | | | |
| 5141AL | | | 3735lm | 3000K | | DALI2/ NightDim |
| 5141GR | | | | | | |
| 5142AL | | 32,6W | 3970lm | 4000K | | |
| 5142GR | | | | | | |

IP65 IK08 LED 6m Al PC DALI 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens Control |
|---|---|---|---|---|---|---|
| 6151AL | LED | 32W | 2996lm | 3000K | > 72 000h | - |
| 6151GR | | | | | | |
| 5145AL | | | 3069lm | 4000K | | |
| 5145GR | | | | | | |
| 5146AL | | | 2953lm | 3000K | | DALI2/ NightDim |
| 5146GR | | | | | | |
| 5147AL | | 32,6 | 3194lm | 4000K | | |
| 5147GR | | | | | | |

IP65 IK08 LED 6m DALI Al PC D4I 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6153AL | LED | 53W | 6900lm | 3000K | > 72 000h | DALI2 / Night-Dim |
| 6153GR | | | | | | |
| 6154AL | | | | | | D4i |
| 6154GR | | | | | | |
| 6155AL | | | 7200lm | 4000K | > 100 000h | DALI2 / Night-Dim |
| 6155GR | | | | | | |
| 6156AL | | | | | > 72 000h | D4i |
| 6156GR | | | | | | |

# Bornholm

Minimalist design, classic shape. In a word, the captivating simplicity and versatility of this lamp, which offers the possibility of many applications. The Bornholm luminaire is durable and long-lasting, and although it is dedicated to external walls, it is just as suitable for a variety of uses indoors. It can be used as a ceiling or wall light. The milky shade minimizes glare, gives evenly spread light and provides comfort to the eye. The Bornholm will be the perfect piece to bring a warm accent to this type of modern interior. It looks great on raw concrete, but will actually be a good complement to any façade or wall.





# Bornholm








**Colour:**

Aluminium

White

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Product Eco-friendly.

IP65 IK10 LED DIM PC Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 541AL | LED | 7,8W | 428lm | 3000K | >50 000h | Dimmable |
| 541GR | | | | | | |
| 541WH | | | | | | |
| 5121AL | | | 443lm | 4000K | | |
| 5121GR | | | | | | |
| 5121WH | | | | | | |

## Bornholm can be mounted as a ceiling fixture!



# Egersund Mini

Energy efficiency, functionality and aesthetics. This rare combination has been achieved in this particular lams. IInnovation happens when it brings economic benefit. Undoubtedly innovative product providing efficiency, durability and low energy consumption thanks to the state-of-the-art LED technology fitted to these luminaires. Durable materials enclosed in a minimalist form and an original reflector in the shape of a metallized cone have given the lamp a completely unique appearance. It will be perfect for gardens, driveways and paths and will be a decoration for both traditional and modern homes.





# Egersund Mini





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP65 IK08 LED DIM DALI PMMA Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1290AL | LED | 9,1W | 864lm | 3000K | > 72 000h | Dimmable |
| 1290GR | | | | | | |
| 5117AL | | | 917lm | 4000K | | |
| 5117GR | | | | | | |
| 2302AL | | | 864lm | 3000K | | DALI |
| 2302GR | | | | | | |
| 2303AL | | 9,6W | 934lm | 4000K | | |
| 2303GR | | | | | | |

IP65 IK08 LED DIM DALI PMMA Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1291AL | LED | 9,1W | 864lm | 3000K | > 72 000h | Dimmable |
| 1291GR | | | | | | |
| 5118AL | | | 917lm | 4000K | | |
| 5118GR | | | | | | |
| 2314AL | | | 864lm | 3000K | | DALI |
| 2314GR | | | | | | |
| 2315AL | | | 915lm | 4000K | | |
| 2315GR | | | | | | |













# Egersund





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 1230**
Concreting anchor




**Art. 1231**
Anchoring support



IP65 IK08 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 1280AL | LED | 20,3W | 1681lm | 3000K | > 162 000h | Dimmable | II |
| 1280GR | | | | | | | |
| 5068AL | | 21,9W | | | | DALI2 / NightDim | I |
| 5068GR | | | | | | | |
| 5014AL | | 20,3W | 1782lm | 4000K | | Dimmable | II |
| 5014GR | | | | | | | |
| 5066AL | | 22W | | | | DALI2 / NightDim | I |
| 5066GR | | | | | | | |

IP65 IK08 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 1285AL | LED | 22W | 1586lm | 3000K | > 162 000h | Dimmable | II |
| 1285GR | | | | | | | |
| 5069AL | | 21,9W | 1681lm | | | DALI2 / NightDim | I |
| 5069GR | | | | | | | |
| 5067AL | | | 1782lm | 4000K | | | |
| 5067GR | | | | | | | |
| 5015AL | | 22W | | | | Dimmable | II |
| 5015GR | | | | | | | |

# Egersund Park

The world takes on different and better colours in the right light. And if, in addition, the light source is stylish, durable and energy-efficient, then we have a complete success. The luminaires from the Egersund Park family are not only intended for park settings and urban greenery. The versatility of the lamps and the possibility of a variety of applications has already been appreciated by many designers. The lightweight construction, simple shape and warm light, radically changes the perception of the space.






| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 6080AL | LED | 9,1W | 907lm | 3000K | > 72 000h | Dimmable | II |
| 6080GR | | | | | | | |
| 6081AL | | | 935lm | 4000K | > 102 000h | | |
| 6081GR | | | | | | | |
| 6082AL | | 23,9W | 2258lm | 3000K | | DALI2 / NightDim | I |
| 6082GR | | | | | | | |
| 6083AL | | | 2319lm | 4000K | | | |
| 6083GR | | | | | | | |




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 6090AL | LED | 9,1W | 907lm | 3000K | > 102 000h | Dimmable | II |
| 6090GR | | | | | | | |
| 6091AL | | | 935lm | 4000K | | | |
| 6091GR | | | | | | | |
| 6092AL | | 23,9W | 2258lm | 3000K | | DALI2 / NightDim | I |
| 6092GR | | | | | | | |
| 6093AL | | | 2319lm | 4000K | | | |
| 6093GR | | | | | | | |

# Egersund Park





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support





# Egersund Park





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**


**Art. 6130**
Concreting anchor




**Art. 6132**
Anchoring support 490mm





**Art. 6135**
Electric box




for Art. 6105, 6107, 6113, 6115

IP65 IK07 LED DIM DALI Al PMMA

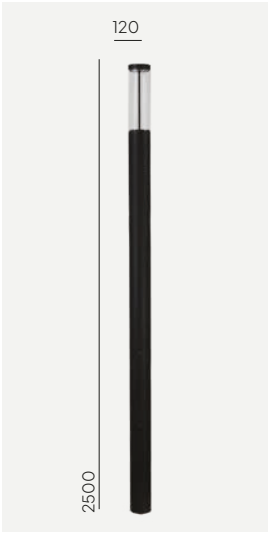


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 6105AL | LED | 9,1W | 907lm | 3000K | > 72 000h | Dimmable | II |
| 6105GR | | | | | | | |
| 6107AL | | | 962lm | 4000K | | | |
| 6107GR | | | | | | | |
| 6113AL | | 23,7W | 2239lm | 3000K | | DALI2 | I |
| 6113GR | | | | | | | |
| 6115AL | | 23,9W | 2314lm | 4000K | | | |
| 6115GR | | | | | | | |
| 6117AL | | 10W | 959lm | 3000K | >50 000h | Dimmable | II |
| 6117GR | | | | | | | |
| 6118AL | | | 1064lm | 4000K | | | |
| 6118GR | | | | | | | |




# Frigga

Frigga delights with its simplicity and timeless style,
subtly referencing Scandinavian tradition.
The distinctive vertical pattern and elegant crystal glass shade give the fixture
a remarkably light and modern appearance. Frigga fits perfectly among garden greenery,
at the entrance to the house or on the terrace, creating an atmospheric, diffused light.
It is the perfect choice for those who appreciate classy design and seek solutions
that highlight the beauty of their surroundings without overwhelming them.




IP65 IK08 LED E27 DALI Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2147AL | E27 | - | - | - | - | - |
| 2147GR | | | | | | |
| 2147BL | | | | | | |
| 2147WH | | | | | | |
| 2153AL | LED | 4,6W | 322lm | 3000K | > 50 000h | DALI2 |
| 2153GR | | | | | | |
| 2153BL | | | | | | |
| 2153WH | | | | | | |
| 2154AL | | | 335lm | 4000K | > 50 000h | |
| 2154GR | | | | | | |
| 2154BL | | | | | | |
| 2154WH | | | | | | |

IP65 IK08 LED E27 DALI Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2148AL | E27 | - | - | - | - | - |
| 2148GR | | | | | | |
| 2148BL | | | | | | |
| 2148WH | | | | | | |
| 2150AL | LED | 4,6W | 322lm | 3000K | > 50 000h | DALI2 |
| 2150GR | | | | | | |
| 2150BL | | | | | | |
| 2150WH | | | | | | |
| 2151AL | | | 335lm | 4000K | > 50 000h | |
| 2151GR | | | | | | |
| 2151BL | | | | | | |
| 2151WH | | | | | | |

# Frigga





**Colour:**

- Aluminium
- White
- Graphite
- Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support





# Geneva





**Colour:**

Aluminium
White
Graphite

**Colour temperature:**


2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Product Eco-friendly.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1874AL | E27 | - | - | - | - | - |
| 1874GR | | | | | | |
| 1874WH | | | | | | |
| 1879AL | LED | 8,3W | 609lm | 3000K | > 72 000h | Dimmable |
| 1879GR | | | | | | |
| 1879WH | | | | | | |
| 1880AL | | 8,4W | 656lm | 4000K | | |
| 1880GR | | | | | | |
| 1880WH | | | | | | |



# Grimstad





220–240V IP65 IK08 IK09 LED E14 DIM AI GL

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Product Eco-friendly.



IP65 IK09 E14 LED DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1545AL | LED | 8,3W | 671lm | 3000K | > 100 000h | Dimmable |
| 1545GR | | | | | | |
| 5025AL | | 7,4W | 721lm | 4000K | | |
| 5025GR | | | | | | |
| 1547AL | E14 | - | - | - | - | - |
| 1547GR | | | | | | |

IP65 IK08 E14 LED DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1544AL | LED | 5,3W | 214lm | 3000K | 70 000h | Dimmable |
| 1544GR | | | | | | |
| 1546AL | E14 | - | - | - | - | - |
| 1546GR | | | | | | |





# Halmstad

Thanks to Halmstad luminaires, garden spaces will acquire a unique charm. The bollard made of natural wood and steel works well with shrubs, perennials, stones and, above all, with the wooden architecture of the garden such as arbours, benches, trellises for climbing plants. Lamps in the garden are exposed to snow, sun, frost and moisture. They will serve for as long as possible heavily exposed to the test of time and weather. The elegant design with modern LED technology and the different sizes make it simply worth applying in the garden. The trees will grow larger, the plants will create a life-giving retreat and the reliable Halmstad luminaires will continue to enhance the beauty of the garden.





# Halmstad








**Colour:**

Black
Graphite
Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Fully replaceable electrical kit.


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support




IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 296BL | E27 | - | - | - | - | - |
| 296GA | | | | | | |
| 296GR | | | | | | |
| 1483BL | LED E27 | 5,9W | 252lm | 2700K | 25 000h | Dimmable |
| 1483GA | | | | | | |
| 1483GR | | | | | | |
| 1482BL | LED | 8,5W | 292lm | 3000K | > 50 000h | |
| 1482GA | | | | | | |
| 1482GR | | | | | | |
| 5022BL | | | 310lm | 4000K | | |
| 5022GA | | | | | | |
| 5022GR | | | | | | |


IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 295BL | E27 | - | - | - | - | - |
| 295GA | | | | | | |
| 295GR | | | | | | |
| 1488BL | LED E27 | 5,9W | 252lm | 2700K | 25 000h | Dimmable |
| 1488GA | | | | | | |
| 1488GR | | | | | | |
| 1489BL | LED | 8,5W | 292lm | 3000K | > 50 000h | |
| 1489GA | | | | | | |
| 1489GR | | | | | | |
| 1346BL | | | 310lm | 4000K | | |
| 1346GA | | | | | | |
| 1346GR | | | | | | |

## Bollard

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 210BL | E27 | - | - | - | - | - |
| 210GA | | | | | | |
| 210GR | | | | | | |
| 212BL | LED E27 | 5,9W | - | 2700K | 25 000h | Dimmable |
| 212GA | | | | | | |
| 212GR | | | | | | |





# Halmstad

scandinavian wood





220–240V IP65 IK10

LED E27 DIM Al Fe PMMA

**Colour:**

- Black
- Galvanized
- Graphite

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire housing made of natural wood.

Product Eco-friendly.


Fully replaceable electrical kit.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1410BL | E27 |
| 1410GA | |
| 1410GR | |

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1400BL | E27 |
| 1400GA | |
| 1400GR | |

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1413BL | E27 |
| 1413GA | |
| 1413GR | |

## Bollard

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1403BL | E27 |
| 1403GA | |
| 1403GR | |





# Halden





**Colour:**

Aluminium

White

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

IP65 IK10 E27 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 510AL | E27 | - | - | - | - | - |
| 510GR | | | | | | |
| 510WH | | | | | | |
| 515AL | LED E27 | 5,9W | 175lm | 2700K | 25000h | Dimmable |
| 515GR | | | | | | |
| 515WH | | | | | | |
| 5096AL | LED | 8,4W | 662lm | 3000K | > 110 000h | DALI2 |
| 5096GR | | | | | | |
| 5096WH | | | | | | |
| 517AL | | 8,5W | 682lm | | | Dimmable |
| 517GR | | | | | | |
| 517WH | | | | | | |
| 5020AL | | | 690lm | 4000K | | |
| 5020GR | | | | | | |
| 5020WH | | | | | | |
| 5097AL | | 8,8W | 696lm | | | DALI2 |
| 5097GR | | | | | | |
| 5097WH | | | | | | |

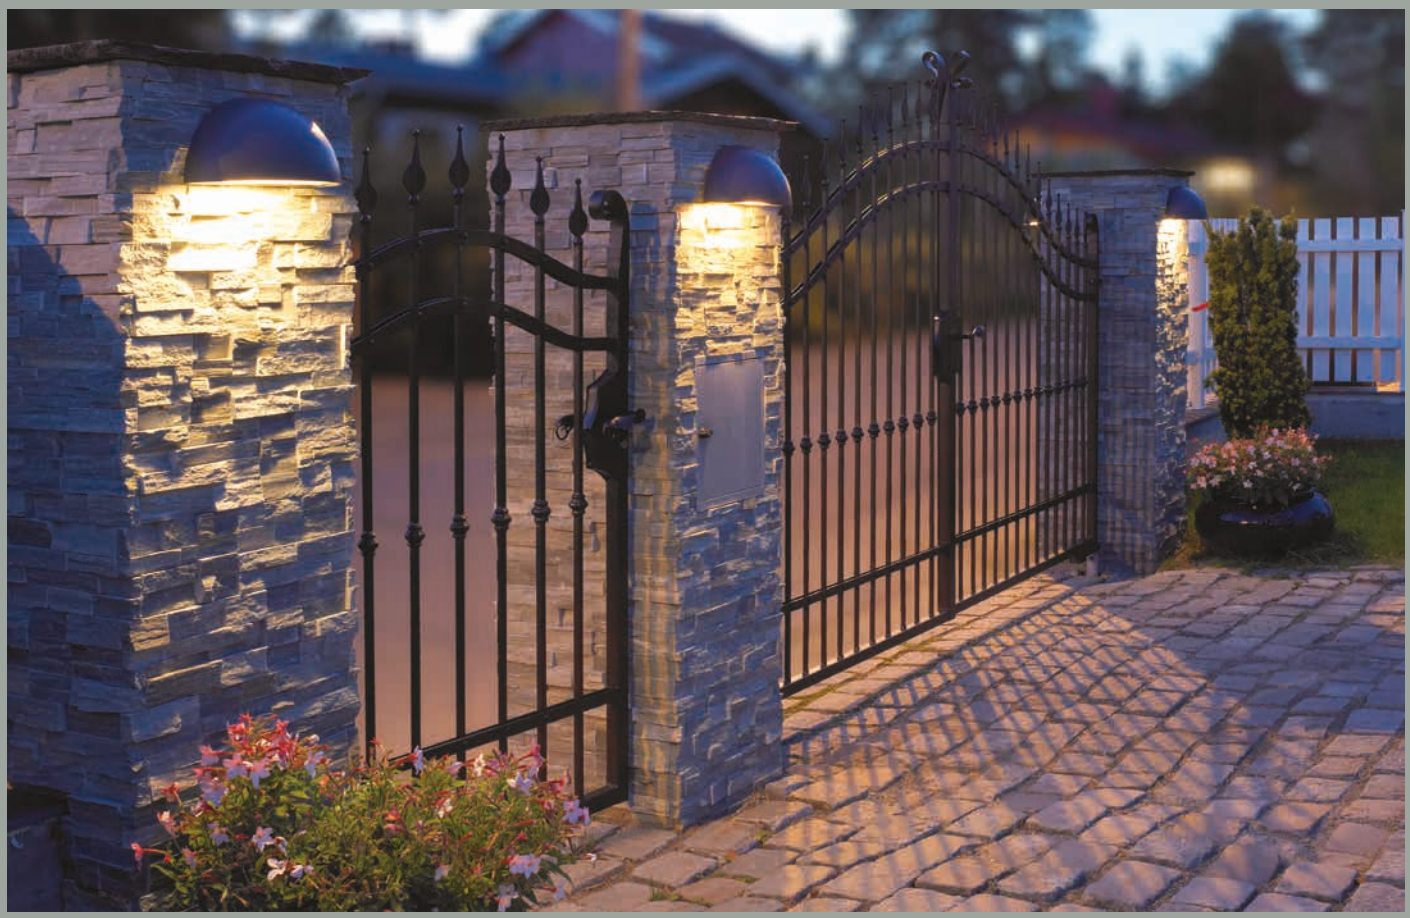

# Hellvik

The original bollard luminaire in a fashionable geometric shape will bring an aura of modernity to any private or public space. The Hellvik lamp is hard to pass by indifferently. Available in several sizes, this bollard offers a range of state-of-the-art light sources and controls to suit the most demanding users. Hellvik is the perfect choice for those who want to combine modernity with reliability and exceptional style. This lamp is a frequent choice of designers. The unusual design will work well in a wide variety of settings. Hellvik likes to play a leading role in the space. It likes to attract attention.





# Hellvik










**Colour:**

Aluminium

Graphite

Black


**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 209**
Concreting anchor




**Art. 2409**
Anchoring support
(2 pcs needed)




IP65 LED DIM DALI Al PMMA PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 2410AL | LED | 11,8W | 1014lm | 3000K | > 72 000h | Dimmable | II |
| 2410BL | | | | | | | |
| 2410GR | | | | | | | |
| 2411AL | | | 1072lm | 4000K | | | |
| 2411BL | | | | | | | |
| 2411GR | | | | | | | |
| 2412AL | | 20,2W | 1747lm | 3000K | | DALI2 | I |
| 2412BL | | | | | | | |
| 2412GR | | | | | | | |
| 2413AL | | | 1803lm | 4000K | | | |
| 2413BL | | | | | | | |
| 2413GR | | | | | | | |
| 2414AL | | 8W | 1038lm | 3000K | > 100 000h | Dimmable | II |
| 2414BL | | | | | | | |
| 2414GR | | | | | | | |
| 2415AL | | 8,1W | 1007lm | 4000K | | | |
| 2415BL | | | | | | | |
| 2415GR | | | | | | | |
| 2416AL | | 11,9W | 1537lm | 3000K | | DALI2 | I |
| 2416BL | | | | | | | |
| 2416GR | | | | | | | |
| 2417AL | | | 1466lm | 4000K | | | |
| 2417BL | | | | | | | |
| 2417GR | | | | | | | |

IP65 LED DIM DALI Al PMMA PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 2400AL | LED | 6,9W | 531lm | 3000K | > 72 000h | Dimmable | II |
| 2400BL | | | | | | | |
| 2400GR | | | | | | | |
| 2401AL | | | 575lm | 4000K | | | |
| 2401BL | | | | | | | |
| 2401GR | | | | | | | |
| 2402AL | | 10,1 W | 670lm | 3000K | | DALI2 | I |
| 2402BL | | | | | | | |
| 2402GR | | | | | | | |
| 2403AL | | | 808lm | 4000K | | | |
| 2403BL | | | | | | | |
| 2403GR | | | | | | | |
| 2404AL | | 8W | 1038lm | 3000K | > 100 000h | Dimmable | II |
| 2404BL | | | | | | | |
| 2404GR | | | | | | | |
| 2405AL | | 8,1W | 1007lm | 4000K | | | |
| 2405BL | | | | | | | |
| 2405GR | | | | | | | |
| 2406AL | | 11,9W | 1537lm | 3000K | | DALI2 | I |
| 2406BL | | | | | | | |
| 2406GR | | | | | | | |
| 2407AL | | | 1549lm | 4000K | | | |
| 2407BL | | | | | | | |
| 2407GR | | | | | | | |



# Hitra





**Colour:**

Aluminium
White
Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Product Eco-friendly.

**Accessories:**

**Art. 151**
Corner bracket tilt 15//30/45 °




IK08 IP65 LED Al GL





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 1330AL | LED | 9,5W | 920lm | 3000K | 50 000 |
| 1330GR | | | | | |
| 1330WH | | | | | |
| 5114AL | | | 979lm | 4000K | |
| 5114GR | | | | | |
| 5114WH | | | | | |
| 1331AL | | 17,5W | 1599lm | 3000K | |
| 1331GR | | | | | |
| 1331WH | | | | | |
| 5115AL | | | 1717lm | 4000K | |
| 5115GR | | | | | |
| 5115WH | | | | | |



# Hitra Ceiling

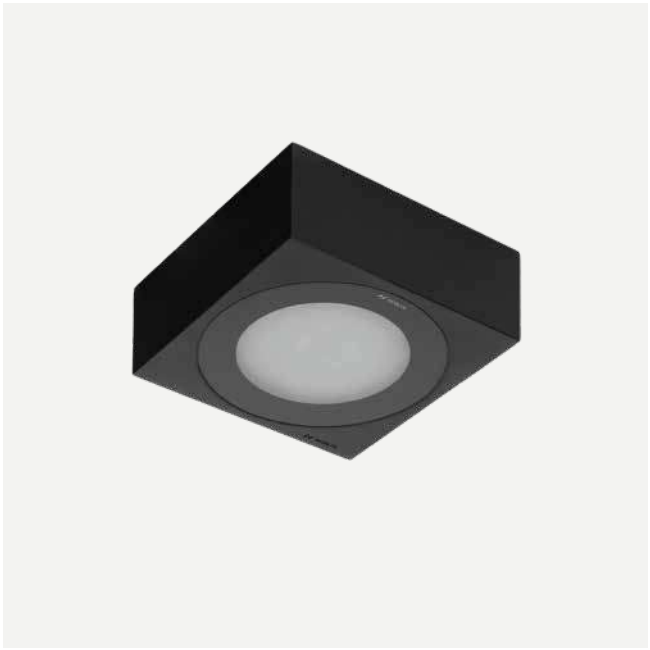



**Colour:**

Aluminium
White
Graphite
Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Product Eco-friendly.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light Control |
|---|---|---|---|---|---|---|
| 2460AL | LED | 14,5W | 1063lm | 3000K | >100 000 | DALI2 |
| 2460GR | | | | | | |
| 2460WH | | | | | | |
| 2460BL | | | | | | |
| 2462AL | | | 1071lm | 4000K | | |
| 2462GR | | | | | | |
| 2462WH | | | | | | |
| 2462BL | | | | | | |



# Hammerfest



Hammerfest mounted on pole 3004, further information on pages 417 – 418.

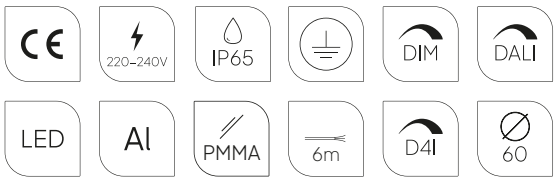






**Colour:**

- Aluminium
- Graphite


**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417 – 418.

**Art. 7665**
Adapter Ø60 for install on pole Ø76




**Art. 154**
Arm for use on wall



IP65 | LED | DALI | PMMA | Al | 6m | ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 5135AL | LED | 32,3W | 3320lm | 4000K | > 72 000h | - |
| 5135GR | | | | | | |
| 5136AL | | 32,5W | 3117lm | 3000K | | DALI2/ NightDim |
| 5136GR | | | | | | |
| 5137AL | | | 3310lm | 4000K | | |
| 5137GR | | | | | | |
| 6141AL | | 32,7W | 3227lm | 3000K | > 50 000h | - |
| 6141GR | | | | | | |

IP65 | LED | DALI | PMMA | Al | 6m | ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 5130AL | LED | 32W | 3933lm | 4000K | > 72 000h | - |
| 5130GR | | | | | | |
| 5131AL | | 32,5W | 3974lm | 3000K | | DALI2/ NightDim |
| 5131GR | | | | | | |
| 5132AL | | | 3721lm | 4000K | | |
| 5132GR | | | | | | |
| 6140AL | | 26,4W | 3321lm | 3000K | > 54 000h | - |
| 6140GR | | | | | | |

IP65 | LED | DALI | D4I | PMMA | Al | 6m | ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 6146AL | LED | 53W | 6519lm | 3000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 6146GR | | | | | | | |
| 6148AL | | | 6802lm | 4000K | | | |
| 6148GR | | | | | | | |
| 6147AL | | | 6545lm | 3000K | | D4i | |
| 6147GR | | | | | | | |
| 6149AL | | | 7375lm | 4000K | | | |
| 6149GR | | | | | | | |

# Kisa

Proven, robust, practical and at the same time suitable for illuminating the driveway is the Kisa luminaire equipped with the latest LED technology. The Kisa lamp in both bollard and pole versions utilizes a huge range of LED applications, offering several control versions and light directions. Light sources must be glare-free as this is a priority for safety and convenience. In Kisa this is ensured by the milky diffuser, giving an intense but non-glare beam of light. The luminaire is also ideal for energy-saving illumination in garden settings and walkway lighting.





# Kisa





CE · 220–240V · IP55 · LED · Al · DIM · DALI · PMMA

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IP55 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 5180AL | LED | 8,8W | 706lm | 3000K | > 70 000h | Dimmable |
| 5180GR | | | | | | |
| 5182AL | | 14,1W | 1185lm | | | DALI2/ NighDim |
| 5182GR | | | | | | |
| 5181AL | | 8,8W | 766lm | 4000K | | Dimmable |
| 5181GR | | | | | | |
| 5183GR | | 14,1W | 1222lm | | | DALI2/ NighDim |
| 5183GR | | | | | | |

IP55 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 5184AL | LED | 13,4W | 1274lm | 3000K | > 70 000h | Dimmable |
| 5184GR | | | | | | |
| 5186AL | | 27W | 2432lm | | | DALI2/ NighDim |
| 5186GR | | | | | | |
| 5187AL | | | 2637lm | 4000K | | |
| 5187GR | | | | | | |
| 5185AL | | 13,4W | 1357lm | | | Dimmable |
| 5185GR | | | | | | |

# Koster


The classics have always had, have and will always have their followers. The Koster lamp family is a proposal for universal lighting. Koster is a group of luminaires with a universal design characterised by a symmetrical light distribution. This design seems to tame the space, introducing calmness and predictability. The Koster luminaire can be used on the outside façade of a building, in the garden, next to a pavement. There are indeed many possibilities. It is available in a wall and two column variants – single and double.





# Koster



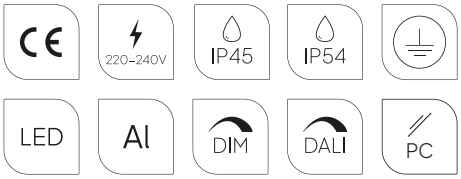




**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 158**
Corner bracket



IK10 IP45 IP54 LED DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | IP | Lens |
|---|---|---|---|---|---|---|---|---|
| 724AL | E27 | - | - | - | - | - | IP54 | - |
| 724GR | | | | | | | | |
| 725AL | LED | 9,5W | 872lm | 3000K | 50 000h | - | | |
| 725GR | | | | | | | | |
| 1912AL | | 17,5W | 1568lm | | | | | |
| 1912GR | | | | | | | | |
| 5004AL | | | 1625lm | 4000K | | | | |
| 5004GR | | | | | | | | |
| 1834AL | | 16,9W | 2090lm | | >100 000h | Dimmable | IP45 | IESNA type V |
| 1834GR | | | | | | | | |
| 1814AL | | | 2007lm | 3000K | | | IP54 | |
| 1814GR | | | | | | | | |
| 1822AL | | 19,6W | 2747lm | | > 120 000h | DALI2/ NightDim | IP45 | |
| 1822GR | | | | | | | | |
| 1842AL | | 19,4W | 2718lm | 4000K | | | | |
| 1842GR | | | | | | | | |







# Koster Pole



Koster mounted on pole 1273, further information on pages 417– 418.





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


**Accessories:**

Luminaires sold separately, recommended poles ø50 and ø60, further information on pages 417– 418.


**Art. 7660**
Adapter Ø60 for mounting on pole Ø76




**Art. 405**
Concreting anchor




**Art. 406**
Anchoring support



IK10 IP65 LED DALI Al PC ∅50




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1815AL | LED | 14,4W | 1991lm | 3000K | > 120 000h | - | IESNA type V |
| 1815GR | | | | | | | |
| 1823AL | | 19,4W | 2747lm | | | DALI2/ NightDim | |
| 1823GR | | | 2718lm | 4000K | | | |
| 1843AL | | | | | | | |
| 1843GR | | | | | | | |
| 1835AL | | 14,4W | 2031lm | | | - | |
| 1835GR | | | | | | | |
| 5070AL | | 17,5W | 1625lm | | 50 000h | | - |
| 5070GR | | | | | | | |
| 1915AL | | | 1568lm | 3000K | | | |
| 1915GR | | | | | | | |

IK10 IP65 LED DALI Al PC ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1817AL | LED | 14,4W | 1991lm | 3000K | > 120 000h | - | IESNA type V |
| 1817GR | | | | | | | |
| 1825AL | | 19,4W | 2747lm | | | DALI2/ NightDim | |
| 1825GR | | | 2718lm | 4000K | | | |
| 1845AL | | | | | | | |
| 1845GR | | | | | | | |
| 1837AL | | 14,4W | 2031lm | | | - | |
| 1837GR | | | | | | | |
| 5006AL | | 17,5W | 1625lm | | 50 000h | | - |
| 5006GR | | | | | | | |
| 1913AL | | | 1568lm | 3000K | | | |
| 1913GR | | | | | | | |

IK10 IP65 LED DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1816AL | LED | 14,4W | 1991lm | 3000K | > 120 000h | - | IESNA type V |
| 1816GR | | | | | | | |
| 1824AL | | 19,4W | 2747lm | | | DALI2/ NightDim | |
| 1824GR | | | 2718lm | 4000K | | | |
| 1844AL | | | | | | | |
| 1844GR | | | | | | | |
| 1836AL | | 14,4W | 2031lm | | | - | |
| 1836GR | | | | | | | |
| 5007AL | | 17,5W | 1625lm | | 50 000h | | - |
| 5007GR | | | | | | | |
| 1914AL | | | 1568lm | 3000K | | | |
| 1914GR | | | | | | | |

IK10 IP65 LED DIM DALI E27 PC 50





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class | Lens |
|---|---|---|---|---|---|---|---|---|
| 1155AL | E27 | - | - | - | - | - | I | - |
| 1155GR | | | | | | | | |
| 1157AL | LED | 35W | 3136lm | 3000K | > 50 000h | - | | |
| 1157GR | | | | | | | | |
| 1159AL | | | 3250lm | 4000K | | | | |
| 1159GR | | | | | | | | |
| 1165AL | | 34W | 3422lm | 3000K | > 120 000h | Dimmable | II | IESNA type V |
| 1165GR | | | | | | | | |
| 1167AL | | | 3624lm | 4000K | | | | |
| 1167GR | | | | | | | | |
| 1173AL | | 37W | 3654lm | 3000K | | DALI2/ NightDim | I | |
| 1173GR | | | | | | | | |
| 1175AL | | | 3825lm | 4000K | | | | |
| 1175GR | | | | | | | | |

IK10 IP65 LED DIM DALI E27 PC 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class | Lens |
|---|---|---|---|---|---|---|---|---|
| 1177AL | E27 | - | - | - | - | - | I | - |
| 1177GR | | | | | | | | |
| 1179AL | LED | 35W | 3136lm | 3000K | > 50 000h | - | | |
| 1179GR | | | | | | | | |
| 1181AL | | | 3250lm | 4000K | | | | |
| 1181GR | | | | | | | | |
| 1187AL | | 34W | 3422lm | 3000K | > 120 000h | Dimmable | II | IESNA type V |
| 1187GR | | | | | | | | |
| 1189AL | | | 3624lm | 4000K | | | | |
| 1189GR | | | | | | | | |
| 1195AL | | 37W | 3654lm | 3000K | | DALI2/ NightDim | I | |
| 1195GR | | | | | | | | |
| 1197AL | | | 3825lm | 4000K | | | | |
| 1197GR | | | | | | | | |

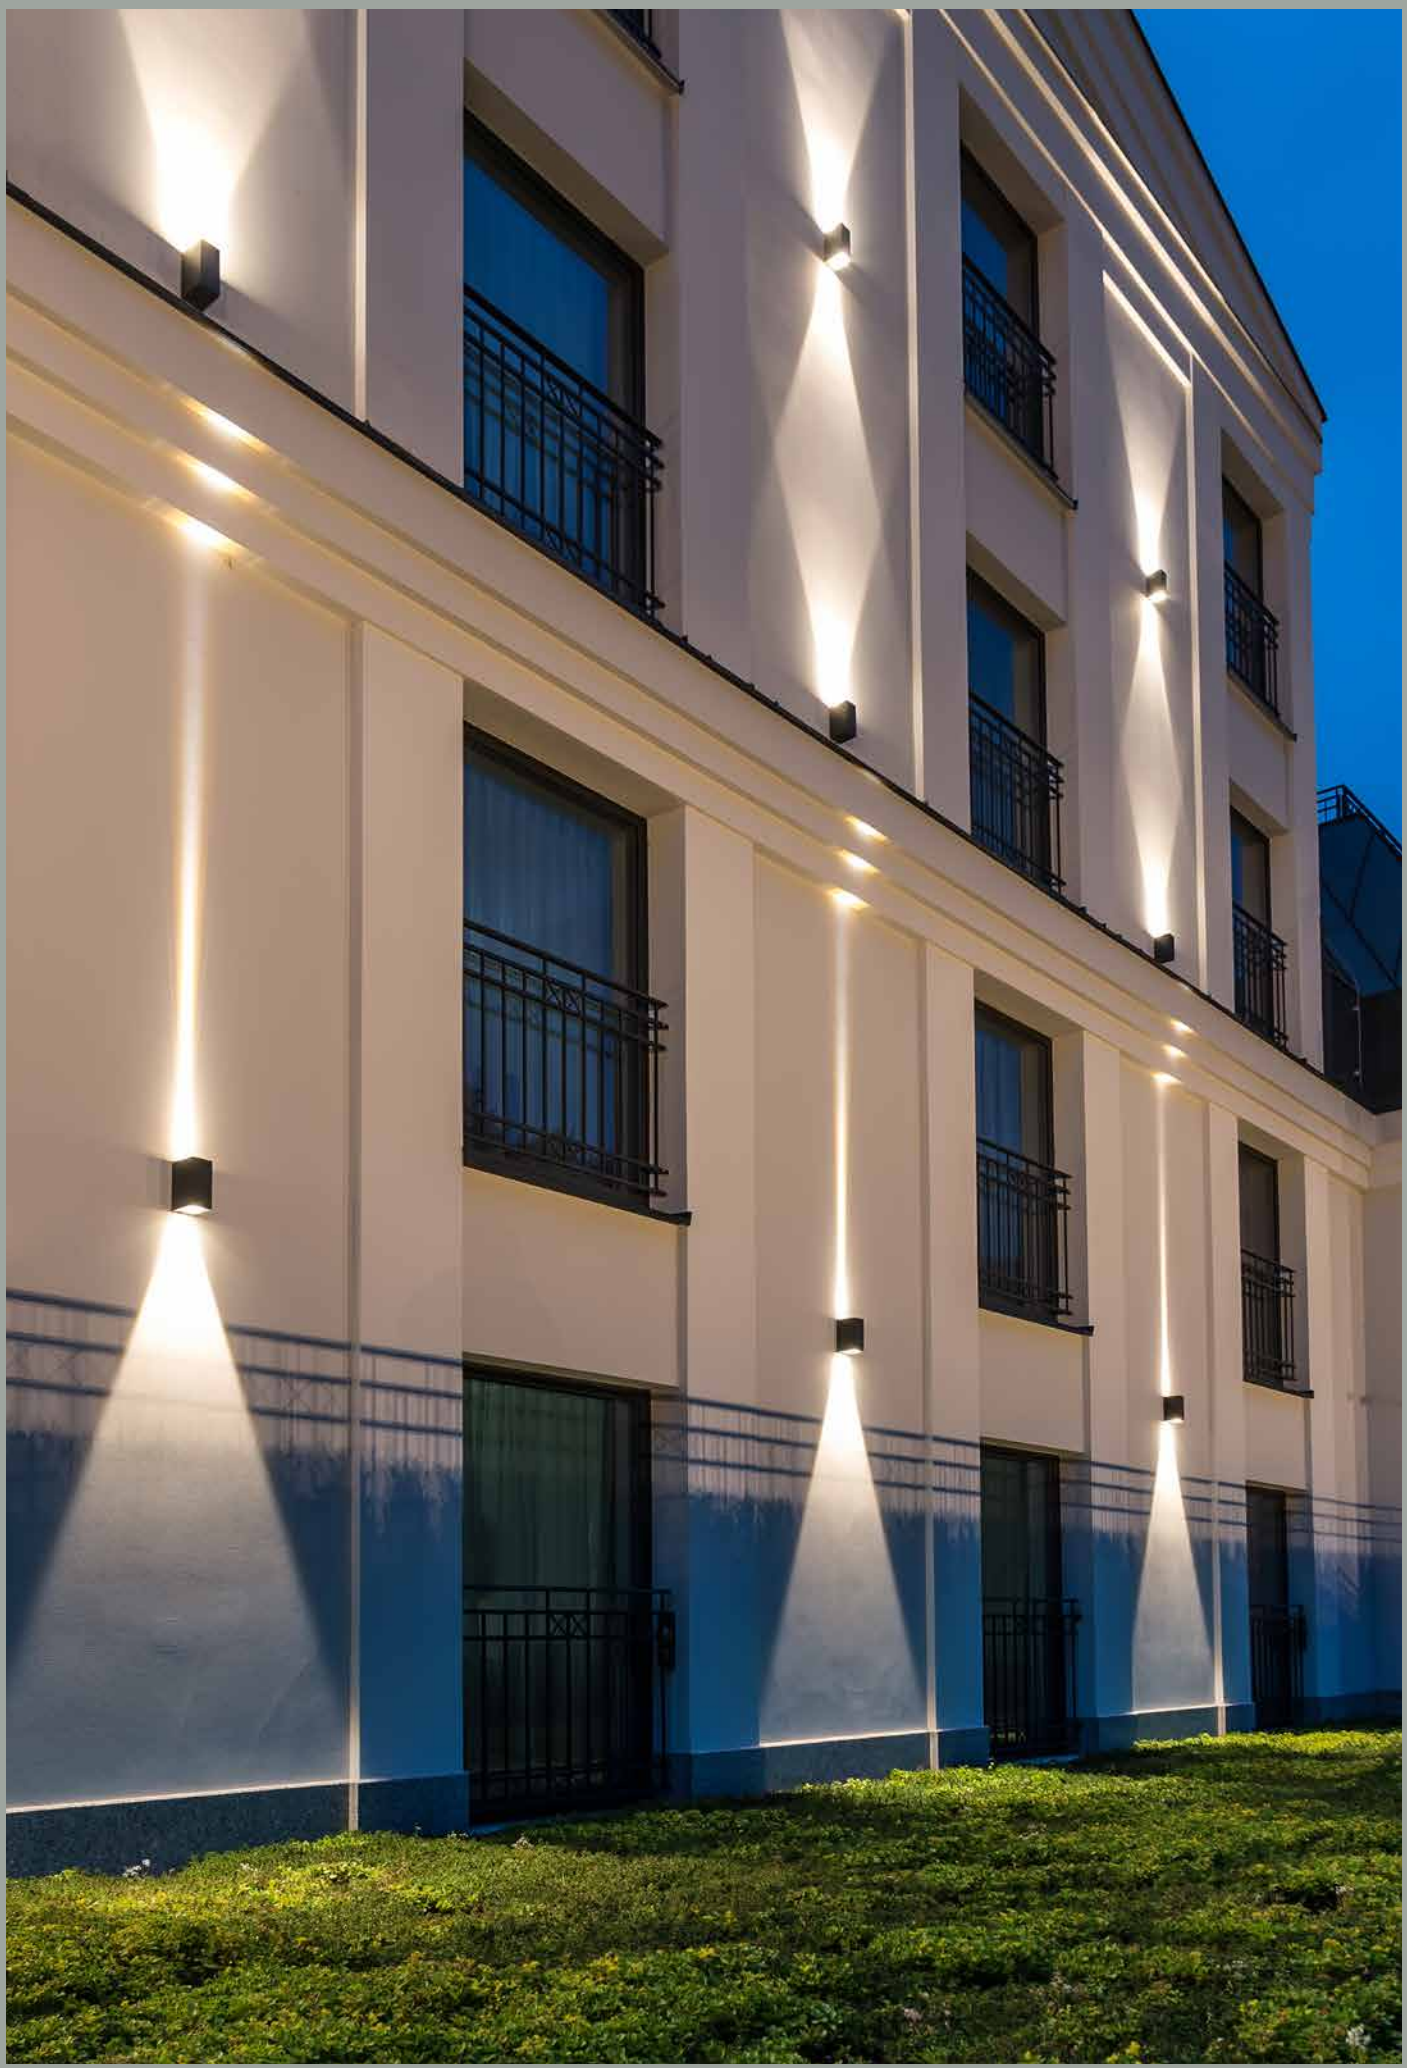

# Lillehammer







**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

Multiple light variants.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



IK08 IP65 LED DIM Al GL 4° 60°





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1580AL | LED | 7,3W | 126lm | 3000K | > 102 000h | Dimmable |
| 1580BL | | | | | | |
| 1580GR | | | | | | |
| 1580WH | | | | | | |
| 5027AL | | | 130lm | 4000K | | |
| 5027BL | | | | | | |
| 5027GR | | | | | | |
| 5027WH | | | | | | |






IK08 IP65 LED DIM Al GL 60°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1581AL | LED | 7,3W | 216lm | 3000K | > 102 000h | Dimmable |
| 1581BL | | | | | | |
| 1581GR | | | | | | |
| 1581WH | | | | | | |
| 5028AL | | | 231lm | 4000K | | |
| 5028BL | | | | | | |
| 5028GR | | | | | | |
| 5028WH | | | | | | |




IK08 IP65 LED DIM Al GL 60°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1582AL | LED | 4W | 107lm | 3000K | > 102 000h | Dimmable |
| 1582BL | | | | | | |
| 1582GR | | | | | | |
| 1582WH | | | | | | |
| 5029AL | | | 112lm | 4000K | | |
| 5029BL | | | | | | |
| 5029GR | | | | | | |
| 5029WH | | | | | | |




IK08 IP65 LED DIM Al GL 4°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1583AL | LED | 7,3W | 34lm | 3000K | > 102 000h | Dimmable |
| 1583BL | | | | | | |
| 1583GR | | | | | | |
| 1583WH | | | | | | |
| 5030AL | | | 38lm | 4000K | | |
| 5030BL | | | | | | |
| 5030GR | | | | | | |
| 5030WH | | | | | | |




IK08 IP65 LED DIM 4°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1584AL | LED | 4W | 17lm | 3000K | > 102 000h | Dimmable |
| 1584BL | | | | | | |
| 1584GR | | | | | | |
| 1584WH | | | | | | |
| 5031AL | | | 18lm | 4000K | | |
| 5031BL | | | | | | |
| 5031GR | | | | | | |
| 5031WH | | | | | | |




IK08 IP65 LED DIM 4°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1585AL | LED | 4W | 17lm | 3000K | > 102 000h | Dimmable |
| 1585BL | | | | | | |
| 1585GR | | | | | | |
| 1585WH | | | | | | |
| 1586AL | | | 18lm | 4000K | | |
| 1586BL | | | | | | |
| 1586GR | | | | | | |
| 1586WH | | | | | | |



IK08 IP65 LED DIM 60°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1587AL | LED | 4W | 108lm | 3000K | > 102 000h | Dimmable |
| 1587BL | | | | | | |
| 1587GR | | | | | | |
| 1587WH | | | | | | |
| 1588AL | | | 135lm | 4000K | | |
| 1588BL | | | | | | |
| 1588GR | | | | | | |
| 1588WH | | | | | | |





# Lillesand





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Product Eco-friendly.

**Accessories:**

**Art. 205**
Concreting anchor




**Art. 206**
Anchoring support



IK08 IP55 IP65 E27 LED DIM Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | IP |
|---|---|---|---|---|---|---|---|
| 1380AL | E27 | - | - | - | - | - | IP55 |
| 1380GR | | | | | | | |
| 1382AL | LED E27 | 5,9W | 495lm | 2700K | 25 000 | Dimmable | |
| 1382GR | | | | | | | |
| 2330AL | LED | 9,2W | 897lm | 3000K | > 72 000h | | IP65 |
| 2330GR | | | | | | | |
| 2331AL | | | 956lm | 4000K | | | |
| 2331GR | | | | | | | |

IK08 IP55 IP65 E27 LED DIM Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | IP |
|---|---|---|---|---|---|---|---|
| 1383AL | E27 | - | - | - | - | - | IP55 |
| 1383GR | | | | | | | |
| 1384AL | LED E27 | 5,9W | 495lm | 2700K | 25 000 | Dimmable | |
| 1384GR | | | | | | | |
| 2342AL | LED | 9,2W | 897lm | 3000K | > 72 000h | | IP65 |
| 2342GR | | | | | | | |
| 2343AL | | | 956lm | 4000K | | | |
| 2343GR | | | | | | | |

# Lysfjord


This wall fixture can be a real discovery for designers of urban spaces and individual investors. We have used innovative configurable lens systems that allows for original lighting effects. The Lysford luminaire, although simple in shape can conjure up an extraordinary atmosphere. The various options for setting the angle of incidence of wide or focused light rays, give a very wide range of possibilities for shaping the space with light. Outstanding quality from NORLYS including aluminium, safety glass, reliable and long-lasting LED.





# Lysfjord



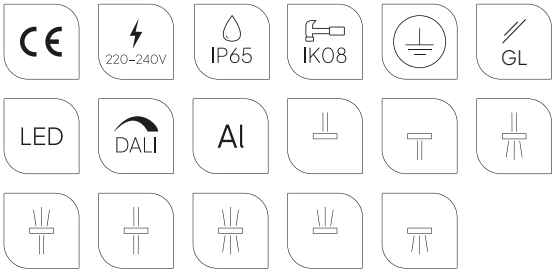




**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Multiple light variants.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

IK08 IP65 LED DALI 4° 60° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6401AL | LED | 14,6W | 946lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6401BL | | | | | | |
| 6401GR | | | | | | |
| 6401WH | | | | | | |
| 6421AL | | | | 4000K | | |
| 6421BL | | | | | | |
| 6421GR | | | | | | |
| 6421WH | | | | | | |

IK08 IP65 LED DALI 60° 4° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6402AL | LED | 26,5W | 946lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6402BL | | | | | | |
| 6402GR | | | | | | |
| 6402WH | | | | | | |
| 6422AL | | | | 4000K | | |
| 6422BL | | | | | | |
| 6422GR | | | | | | |
| 6422WH | | | | | | |

IK08 IP65 LED DALI 60° 60° GL Al





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6403AL | LED | 26,5W | 1814lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6403BL | | | | | | |
| 6403GR | | | | | | |
| 6403WH | | | | | | |
| 6423AL | | | | 4000K | | |
| 6423BL | | | | | | |
| 6423GR | | | | | | |
| 6423WH | | | | | | |

IK08 IP65 LED DALI 4° 4° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6404AL | LED | 26,5W | 78lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6404BL | | | | | | |
| 6404GR | | | | | | |
| 6404WH | | | | | | |
| 6424AL | | | | 4000K | | |
| 6424BL | | | | | | |
| 6424GR | | | | | | |
| 6424WH | | | | | | |

IK08 IP65 LED DALI 4° GL Al





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6405AL | LED | 26,5W | 39lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6405BL | | | | | | |
| 6405GR | | | | | | |
| 6405WH | | | | | | |
| 6425AL | | | 37lm | 4000K | | |
| 6425BL | | | | | | |
| 6425GR | | | | | | |
| 6425WH | | | | | | |

IK08 IP65 LED DALI 4° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6406AL | LED | 14,6W | 39lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6406BL | | | | | | |
| 6406GR | | | | | | |
| 6406WH | | | | | | |
| 6426AL | | | 37lm | 4000K | | |
| 6426BL | | | | | | |
| 6426GR | | | | | | |
| 6426WH | | | | | | |

IK08 IP65 LED DALI 60° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6407AL | LED | 14,6W | 998lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6407BL | | | | | | |
| 6407GR | | | | | | |
| 6407WH | | | | | | |
| 6427AL | | | 1016lm | 4000K | | |
| 6427BL | | | | | | |
| 6427GR | | | | | | |
| 6427WH | | | | | | |

IK08 IP65 LED DALI 60° GL Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6408AL | LED | 14,6W | 998lm | 3000K | > 70 000h | DALI2/ NightDim |
| 6408BL | | | | | | |
| 6408GR | | | | | | |
| 6408WH | | | | | | |
| 6428AL | | | 1016lm | 4000K | | |
| 6428BL | | | | | | |
| 6428GR | | | | | | |
| 6428WH | | | | | | |

IK07 IP54 LED DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2026AL | LED | 8W | 386lm | 3000K | 50 000 | Dimmable |
| 2026GR | | | | | | |
| 2027AL | | | 438lm | 4000K | | |
| 2027GR | | | | | | |

IK07 IP54 LED Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Motion Detector |
|---|---|---|---|---|---|---|
| 2028AL | LED | 8W | 386lm | 3000K | 50 000 | PIR |
| 2028GR | | | | | | |
| 2029AL | | | 438lm | 4000K | | |
| 2029GR | | | | | | |



# Molde





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



# Molde





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 1907**
Concreting anchor




**Art. 1908**
Anchoring support



IK07 IP54 LED DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1901AL | LED | 8W | 386lm | 3000K | 50 000 | Dimmable |
| 1901GR | | | | | | |
| 5107AL | | | 438lm | 4000K | | |
| 5107GR | | | | | | |

IK07 IP54 LED Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Motion Detector |
|---|---|---|---|---|---|---|
| 1970AL | LED | 8,2W | 386lm | 3000K | > 55 000h | PIR |
| 1970GR | | | | | | |
| 1972AL | | | 438lm | 4000K | | |
| 1972GR | | | | | | |

IK07 IP54 LED DIM Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1903AL | LED | 8W | 386lm | 3000K | 50 000 | Dimmable |
| 1903GR | | | | | | |
| 1904AL | | | 438lm | 4000K | | |
| 1904GR | | | | | | |

IK07 IP54 LED Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Motion Detector |
|---|---|---|---|---|---|---|
| 1971AL | LED | 8,2W | 386lm | 3000K | > 55 000h | PIR |
| 1971GR | | | | | | |
| 1973AL | | | 438lm | 4000K | | |
| 1973GR | | | | | | |

# Mora

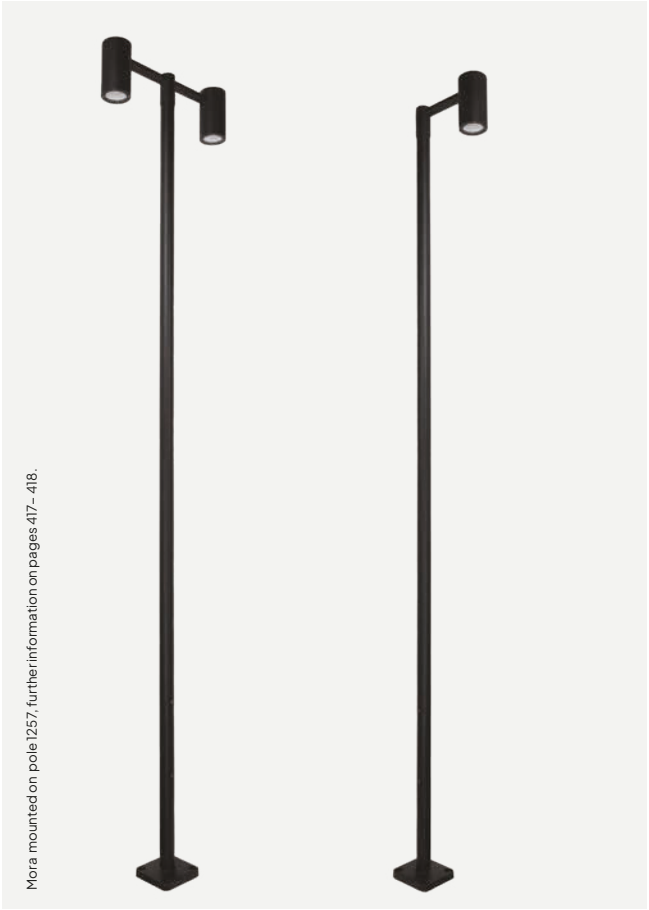

Mora mounted on pole 1257, further information on pages 417 – 418.



**Colour:**

- Aluminium
- Graphite
- Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417 – 418.

IK08 IP65 LED DALI Al GL 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6466AL | LED | 33,9W | 3229lm | 3000K | > 110 000h | DALI2/ NigthDim |
| 6466BL | | | | | | |
| 6466GR | | | | | | |
| 6467AL | | 33,5W | 3437lm | 4000K | | |
| 6467BL | | | | | | |
| 6467GR | | | | | | |

IK08 IP65 LED DALI Al GL 60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6460AL | LED | 17,6W | 1626lm | 3000K | > 110 000h | DALI2/ NigthDim |
| 6460BL | | | | | | |
| 6460GR | | | | | | |
| 6461AL | | | 1735lm | 4000K | | |
| 6461BL | | | | | | |
| 6461GR | | | | | | |

# Moss


Moss spotlights combine a simple form with small dimensions. They are ideal for illuminating small architecture, individual trees or other elements of the garden layout important to the owner. Thanks to their small size, Moss can be hidden and the light will be the main feature. The undoubted strengths of this family of luminaires, thanks to the innovative use of a phase dimming system, are the ability to select the power, colour and brightness adjustment of the light source. The luminaires in the Moss family offer angle adjustment and versatility through a variety of mounting options. These include ceiling-mounted, pole-mounted, portable, driven into the ground and free-standing bollards variants.





# Moss



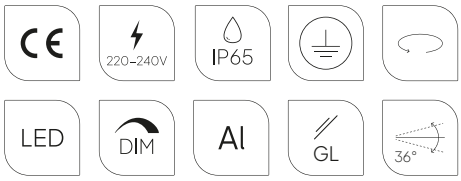


**Colour:**

- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Product Eco-friendly.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Wide range of light direction adjustment.

**Accessories:**

**Art. 6437**
Plate



IP65 | LED | DIM | Al | GL | 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6161BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable |
| 6161GR | | | | | | |
| 6162BL | | | 414lm | 4000K | | |
| 6162GR | | | | | | |
| 6163BL | | 8W | 686lm | 3000K | | |
| 6163GR | | | | | | |
| 6164BL | | | 749lm | 4000K | | |
| 6164GR | | | | | | |

*All indexes also available with 15° or 24° light angle, contact your supplier.

IP65 | LED | DIM | Al | GL | 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Clamp |
|---|---|---|---|---|---|---|---|
| 6732BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable | Ø50 |
| 6732GR | | | | | | | |
| 6750BL | | 8W | 686lm | | | | |
| 6750GR | | | | | | | |
| 6735BL | | 4W | 389lm | | | | Ø60 |
| 6735GR | | | | | | | |
| 6753BL | | 8W | 686lm | | | | |
| 6753GR | | | | | | | |
| 6738BL | | 4W | 389lm | | | | Ø76 |
| 6738GR | | | | | | | |
| 6756BL | | 8W | 686lm | | | | |
| 6756GR | | | | | | | |

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

IP65 | LED | DIM | Al | GL | 3m | 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6702BL | LED | 8W | 686lm | 3000K | > 50 000h | Dimmable |
| 6702GR | | | | | | |
| 6706BL | | 4W | 389lm | | | |
| 6706GR | | | | | | |

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

# Moss





**Colour:**

- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.







Product Eco-friendly.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**
Hermetic IP68 box with 3 lines




**Art. 6729**
Head mount




**Art. 6434 (ø50), 6435 (ø60), 6436 (ø76)**
Clams.







| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6165BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable |
| 6165GR | | | | | | |
| 6166BL | | | 414lm | 4000K | | |
| 6166GR | | | | | | |
| 6167BL | | 8W | 686lm | 3000K | | |
| 6167GR | | | | | | |
| 6168BL | | | 749lm | 4000K | | |
| 6168GR | | | | | | |

*All indexes also available with 15° or 24° light angle, contact your supplier.







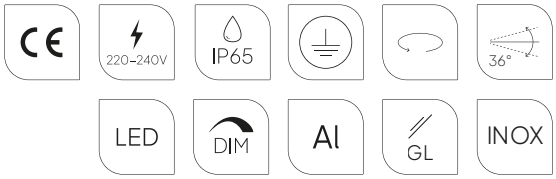

| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6602BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable |
| 6602GR | | | | | | |
| 6603BL | | | 414lm | 4000K | | |
| 6603GR | | | | | | |
| 6600BL | | 8W | 686lm | 3000K | | |
| 6600GR | | | | | | |
| 6601BL | | | 749lm | 4000K | | |
| 6601GR | | | | | | |

*All indexes also available with 15° or 24° light angle, contact your supplier.

*

# Moss

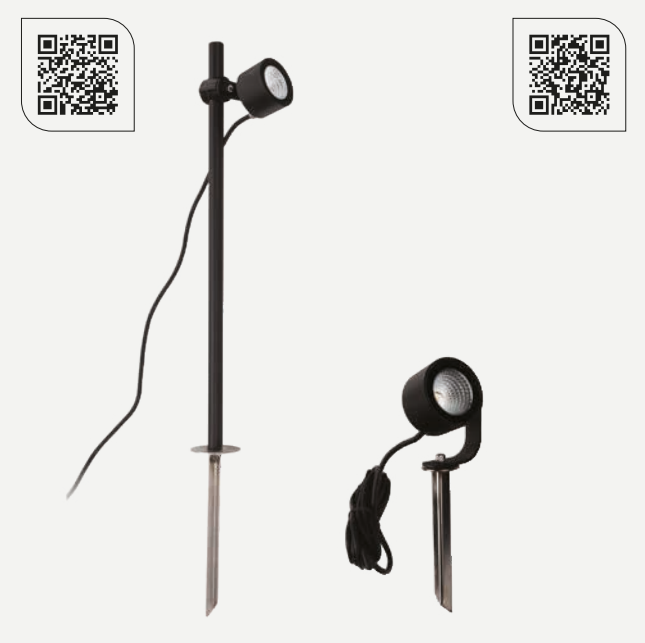




**Colour:**

Black

Graphite

Stainless Steel

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Product Eco-friendly.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Wide range of light direction adjustment.

**Accessories:**

**Art. 145**
Hermetic IP68 box with 3 lines




**Art. 146**
8-way connection box IP68



IP65 LED DIM GL Al Fe INOX 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6346BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable |
| 6346GR | | | | | | |
| 6346ST | | | | | | |
| 6352BL | | | 414lm | 4000K | | |
| 6352GR | | | | | | |
| 6352ST | | | | | | |
| 6376BL | | 8W | 749lm | | | |
| 6376GR | | | | | | |
| 6376ST | | | | | | |
| 6370BL | | | 686lm | 3000K' | | |
| 6370GR | | | | | | |
| 6370ST | | | | | | |

*All indexes also available with 15° or 24° light angle, contact your supplier.

IP65 LED DIM GL Al Fe INOX 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 6355BL | LED | 4W | 389lm | 3000K | > 50 000h | Dimmable |
| 6355GR | | | | | | |
| 6355ST | | | | | | |
| 6361BL | | | 414lm | 4000K | | |
| 6361GR | | | | | | |
| 6361ST | | | | | | |
| 6385BL | | 8W | 749lm | | | |
| 6385GR | | | | | | |
| 6385ST | | | | | | |
| 6379BL | | | 686lm | 3000K | | |
| 6379GR | | | | | | |
| 6379ST | | | | | | |

*All indexes also available with 15° or 24° light angle, contact your supplier.

# Moss






**Colour:**

- Black
- Graphite
- Stainless Steel

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

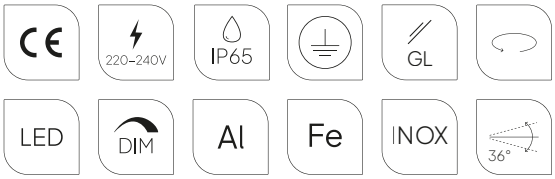





Product Eco-friendly.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjust-ment.

**Accessories:**

**Art. 145**
Hermetic IP68 box with 3 lines




IP65 | LED | DALI | GL* | Al




* Lampenschirm Klar

| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2464AL | LED | 10,3W | 793lm | 3000K | 50 000h | DALI2 |
| 2464GR | | | | | | |
| 2464WH | | | | | | |
| 2464BL | | | | | | |
| 2473AL | | 15,3W | 613lm | | | |
| 2473GR | | | | | | |
| 2473WH | | | | | | |
| 2473BL | | | | | | |
| 2470AL | | | 1103lm | | | |
| 2470GR | | | | | | |
| 2470WH | | | | | | |
| 2470BL | | | | | | |
| 2482AL | | 15W | 1079lm | | | Dimmbar |
| 2482GR | | | | | | |
| 2482WH | | | | | | |
| 2482BL | | | | | | |
| 2488AL | | 6W | 397lm | | | DALI2 |
| 2488GR | | | | | | |
| 2488WH | | | | | | |
| 2488BL | | | | | | |
| 2494AL | | 8W | 551lm | | | |
| 2494GR | | | | | | |
| 2494WH | | | | | | |
| 2494BL | | | | | | |

IP65 | LED | DALI | GL* | Al




* Lampenschirm Satiniert

| Art | Lichtquelle | Leistung | Lichtstrom | LED-Farbe | L70/B50 | Steuerung |
|---|---|---|---|---|---|---|
| 2467AL | LED | 10,3W | 475lm | 3000K | 50 000h | DALI2 |
| 2467GR | | | | | | |
| 2467WH | | | | | | |
| 2467BL | | | | | | |
| 2491AL | | 6W | 233lm | | | |
| 2491GR | | | | | | |
| 2491WH | | | | | | |
| 2491BL | | | | | | |
| 2497AL | | 8W | 306lm | | | |
| 2497GR | | | | | | |
| 2497WH | | | | | | |
| 2497BL | | | | | | |
| 2485AL | | 15W | 679lm | | | Dimmbar |
| 2485GR | | | | | | |
| 2485WH | | | | | | |
| 2485BL | | | | | | |

# Nora





**Farbe:**

- Aluminium
- Graphite
- White
- Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



# Nordland





**Colour:**

Aluminium

Graphite

White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).





IP65 IK10 LED DIM DALI PC Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 718AL | LED | 10W | 574lm | 3000K | 50 000h | Dimmable |
| 718GR | | | | | | |
| 718WH | | | | | | |
| 5016AL | | 9,6W | 594lm | 4000K | | |
| 5016GR | | | | | | |
| 5016WH | | | | | | |
| 5047AL | | 15,4W | 933lm | | | |
| 5047GR | | | | | | |
| 5047WH | | | | | | |
| 5046AL | | 16W | 934lm | 3000K | | |
| 5046GR | | | | | | |
| 5046WH | | | | | | |
| 5253AL | | 28,9W | 2183lm | | > 80 000h | DALI2 |
| 5253GR | | | | | | |
| 5253WH | | | | | | |
| 5255AL | | | 2308lm | 4000K | | |
| 5255GR | | | | | | |
| 5255WH | | | | | | |
| 7120AL | 2× E27 | - | - | - | - | - |
| 7120GR | | | | | | |
| 7120WH | | | | | | |





# Nidaros










**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 3084**
Distance.



IP65 | LED | DIM | Al | GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2122AL | LED | 8,3W | 765lm | 3000K | > 50 000h | Dimmable |
| 2122BL | | | | | | |
| 2122GR | | | | | | |
| 2122WH | | | | | | |
| 2125AL | | 8,5W | | 4000K | 50 000h | |
| 2125BL | | | | | | |
| 2125GR | | | | | | |
| 2125WH | | | | | | |

IP65 | LED | DIM | Al | GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2121AL | LED | 7,8W | 765lm | 3000K | >110 000h | Dimmable |
| 2121BL | | | | | | |
| 2121GR | | | | | | |
| 2121WH | | | | | | |
| 2124AL | | 8,5W | | 4000K | 50 000h | |
| 2124BL | | | | | | |
| 2124GR | | | | | | |
| 2124WH | | | | | | |

IP65 | LED | DIM | Al | GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 2120AL | LED | 10,7W | 631lm | 3000K | 50 000h | Dimmable |
| 2120BL | | | | | | |
| 2120GR | | | | | | |
| 2120WH | | | | | | |
| 2123AL | | | | 4000K | | |
| 2123BL | | | | | | |
| 2123GR | | | | | | |
| 2123WH | | | | | | |

# Narvik

It looks robust and it really is. This bollard is a luminaire with a legendary durability that will cope perfectly with any weather conditions. The path leading to the gate, the terrace where we spend long summer evenings, the driveway – the Narvik bollard will work everywhere. The ingeniously designed diffuser emits a rotationally symmetrical stream of light, and thanks to the use of the latest technology, the luminaire provides a maximum field of illumination in relation to its size. Narvik is the ideal solution for modern architecture. It is also available in a PRO version, which, with half the power of the luminaire compared to the basic model, provides 30% more light output.





# Narvik





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

Vandal-resistant luminaire.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 505**
Concreting anchor




**Art. 110**
Ground anchor




**Art. 115**
Ground anchor



IK10 IP65 LED DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 557AL | LED | 21,8W | 556lm | 3000K | > 110 000h | - |
| 557GR | | | | | | |
| 5091AL | | 22,5W | 597lm | | | DALI2/ NightDim |
| 5091GR | | | | | | |
| 5024AL | | 21,8W | 564lm | 4000K | | - |
| 5024GR | | | | | | |
| 5090AL | | | 582lm | | > 50 000h | DALI2/ NightDim |
| 5090GR | | | | | | |

IK10 IP65 LED DALI DIM PMMA Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1735AL | LED | 22,2W | 1122lm | 3000K | > 72 000h | DALI2/ NightDim |
| 1735GR | | | | | | |
| 1850AL | | | | | | - |
| 1850GR | | | | | | |
| 559AL | | 13,4W | 666lm | | | DIM |
| 559GR | | | | | | |
| 1733AL | | | 757lm | 4000K | | |
| 1733GR | | | | | | |
| 1737AL | | 22,2W | 1162lm | | | DALI2/ NightDim |
| 1737GR | | | | | | |
| 1851AL | | | | | | - |
| 1851GR | | | | | | |


IK10 IP65 LED DALI DIM PMMA Al





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1736AL | LED | 22,2W | 1416lm | 3000K | > 72 000h | DALI2/ NightDim |
| 1736GR | | | | | | |
| 1852GR | | | | | | - |
| 1852GR | | | | | | |
| 553AL | | 13,6W | 853lm | | | DIM |
| 553GR | | | | | | |
| 1734AL | | 13,4W | 959lm | 4000K | | |
| 1734GR | | | | | | |
| 1738AL | | 22,2W | 1475lm | | | DALI2/ NightDim |
| 1738GR | | | | | | |
| 1853AL | | | | | | - |
| 1853GR | | | | | | |

# Namsos

Lighting should give us a feeling of safety and comfort when moving around. Nasmos will be perfect for lighting stairs, steps, staircases and passageways. We recommend Namsos where you need to illuminate the most important points of your property, especially if there is a difference in level. This unusual luminaire will work perfectly as a modern lighting solution for wall surfaces and guarantees even illumination of the area under the lams. It looks equally good built  into the wall as well as the bollard version.

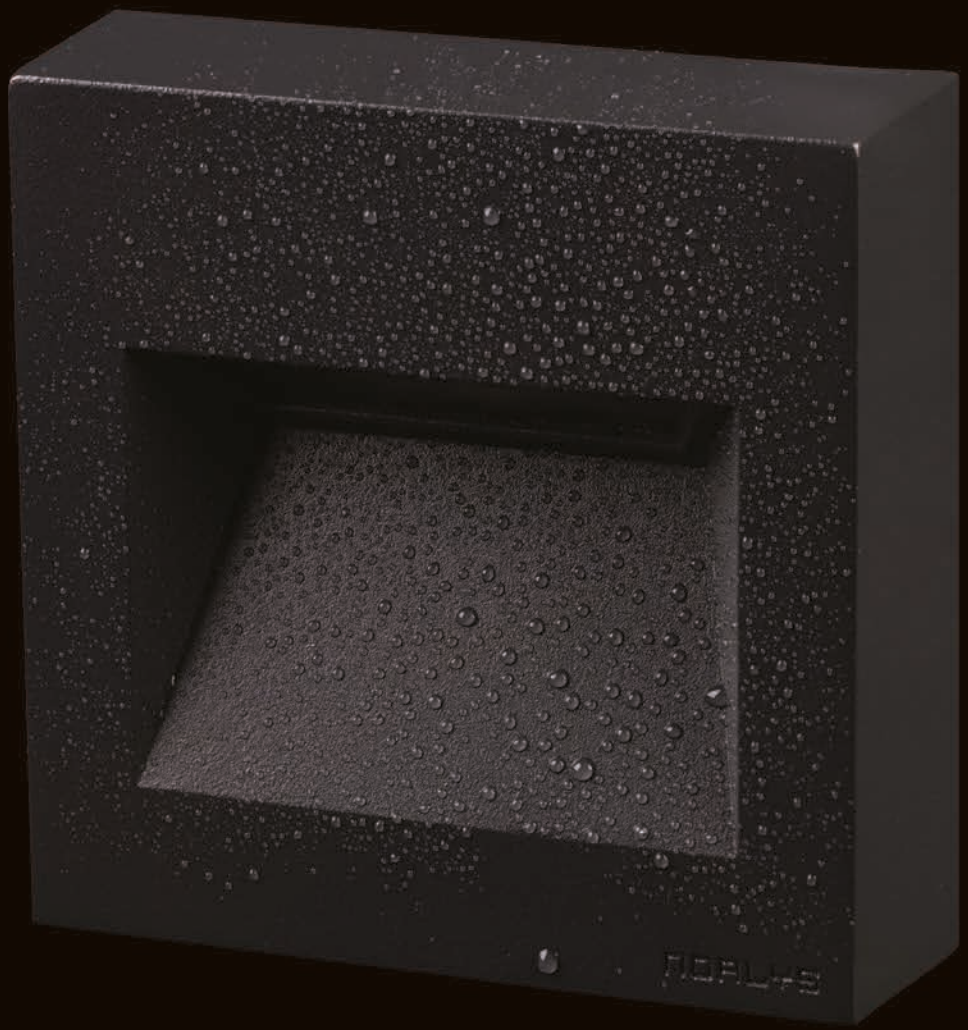

IK09 IP65 LED DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1341AL | LED | 4W | 123lm | 3000K | > 50 000 | Dimmable |
| 1341GR | | | | | | |
| 5156AL | | 4,2W | 162lm | 4000K | | |
| 5156GR | | | | | | |



# Namsos





CE 220–240V IK09 IP65 LED DIM AI GL

**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 157**
Mounting distance





# Namsos







**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 112**
Concreting anchor




**Art. 113**
Ground anchor



IK08 IP65 LED DIM DALI AI GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1931AL | LED | 8,4W | 566lm | 3000K | > 102 000h | Dimmable |
| 1931GR | | | | | | |
| 5012AL | | 8,6W | 612lm | 4000K | | |
| 5012GR | | | | | | |
| 6035AL | | 13,8W | 877lm | | | DALI2 |
| 6035GR | | | | | | |
| 6033AL | | | 904lm | 3000K | | |
| 6033GR | | | | | | |

IK08 IP65 LED DIM DALI AI GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1932AL | LED | 8,6W | 566lm | 3000K | > 102 000h | Dimmable |
| 1932GR | | | | | | |
| 5013AL | | | 612lm | 4000K | | |
| 5013GR | | | | | | |
| 6036AL | | 13,8W | 877lm | | | DALI2 |
| 6036GR | | | | | | |
| 6034AL | | | 904lm | 3000K | | |
| 6034GR | | | | | | |





# Namsos







**Colour:**

- Aluminium
- Graphite
- Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

IK08 IP65 LED DALI DIM Al GL





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1929AL | LED | 13,6W | 843lm | 3000K | > 102 000h | Dimmable |
| 1929GR | | | | | | |
| 1930AL | | 8,4W | 566lm | | | |
| 1930GR | | | | | | |
| 6032AL | | 13,8W | 904lm | | | DALI2 |
| 6032GR | | | | | | |
| 1934AL | | 14W | 907lm | 4000K | | Dimmable |
| 1934GR | | | | | | |
| 5011AL | | 8,6W | 612lm | | | |
| 5011GR | | | | | | |
| 6031AL | | 13,8W | 877lm | | | DALI2 |
| 6031GR | | | | | | |

IK10 IP44 LED DIM Fe GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1933GA | LED | 5,2W | 295lm | 3000K | > 70 000 | Dimmable |
| 5116GA | | | 689lm | 4000K | | |

IK10 IP65 LED DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1340AL | LED | 4W | 47lm | 3000K | > 50 000h | Dimmable |
| 1340GR | | | | | | |

# Namsos Mini





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).





# Nice



Nice mounted on pole 3004, further information on pages 417 – 418.





**Colour:**

- Aluminium
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Product Eco-friendly.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417– 418.

**Art. 154**
Wall mounting arm




**Art. 7665**
Reduction for fittings Ø60 for mounting on a pole Ø76



IK07 IP65 LED DALI 4,5m Al GL ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 777AL | LED | 38W | 3029lm | 3000K | > 110 000h | - |
| 777GR | | | | | | |
| 5089GR | | 36,3W | 2964lm | | > 50 000h | DALI2/ NightDim |
| 5089AL | | | | | | |
| 5088AL | | | 3092lm | 4000K | | |
| 5088GR | | | | | | |
| 5001AL | | 38W | | | > 110 000h | - |
| 5001GR | | | | | | |



# Oppland

The Oppland bollards  will work fantastically between a garden path and a flower bed. They will illuminate a passage, add mystery to the plants and give depth to the garden. The Oppland luminaires family stands for energy-saving LED technology, minimalist yet elegant design, durability of materials and reliability. Choice between a modern-style aluminium body or a wooden body, in two colours, in arrangements closer to nature.  Oppland bollards will not only provide exceptionally effective lighting. They will bring an elegant and modern accent to any environment that is sure to attract attention.  Oppland simply illuminates beautifully.





# Oppland





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 205**
Concreting anchor





**Art. 206**
Anchoring support



IP65 IK09 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1324AL | LED | 8,2W | 304lm | 3000K | > 171 460h | DALI2 |
| 1324GR | | | | | | |
| 1321AL | | | | | > 50 000h | Dimmable |
| 1321GR | | | | | | |
| 5123AL | | 9,3W | 313lm | 4000K | | |
| 5123GR | | | | | | |

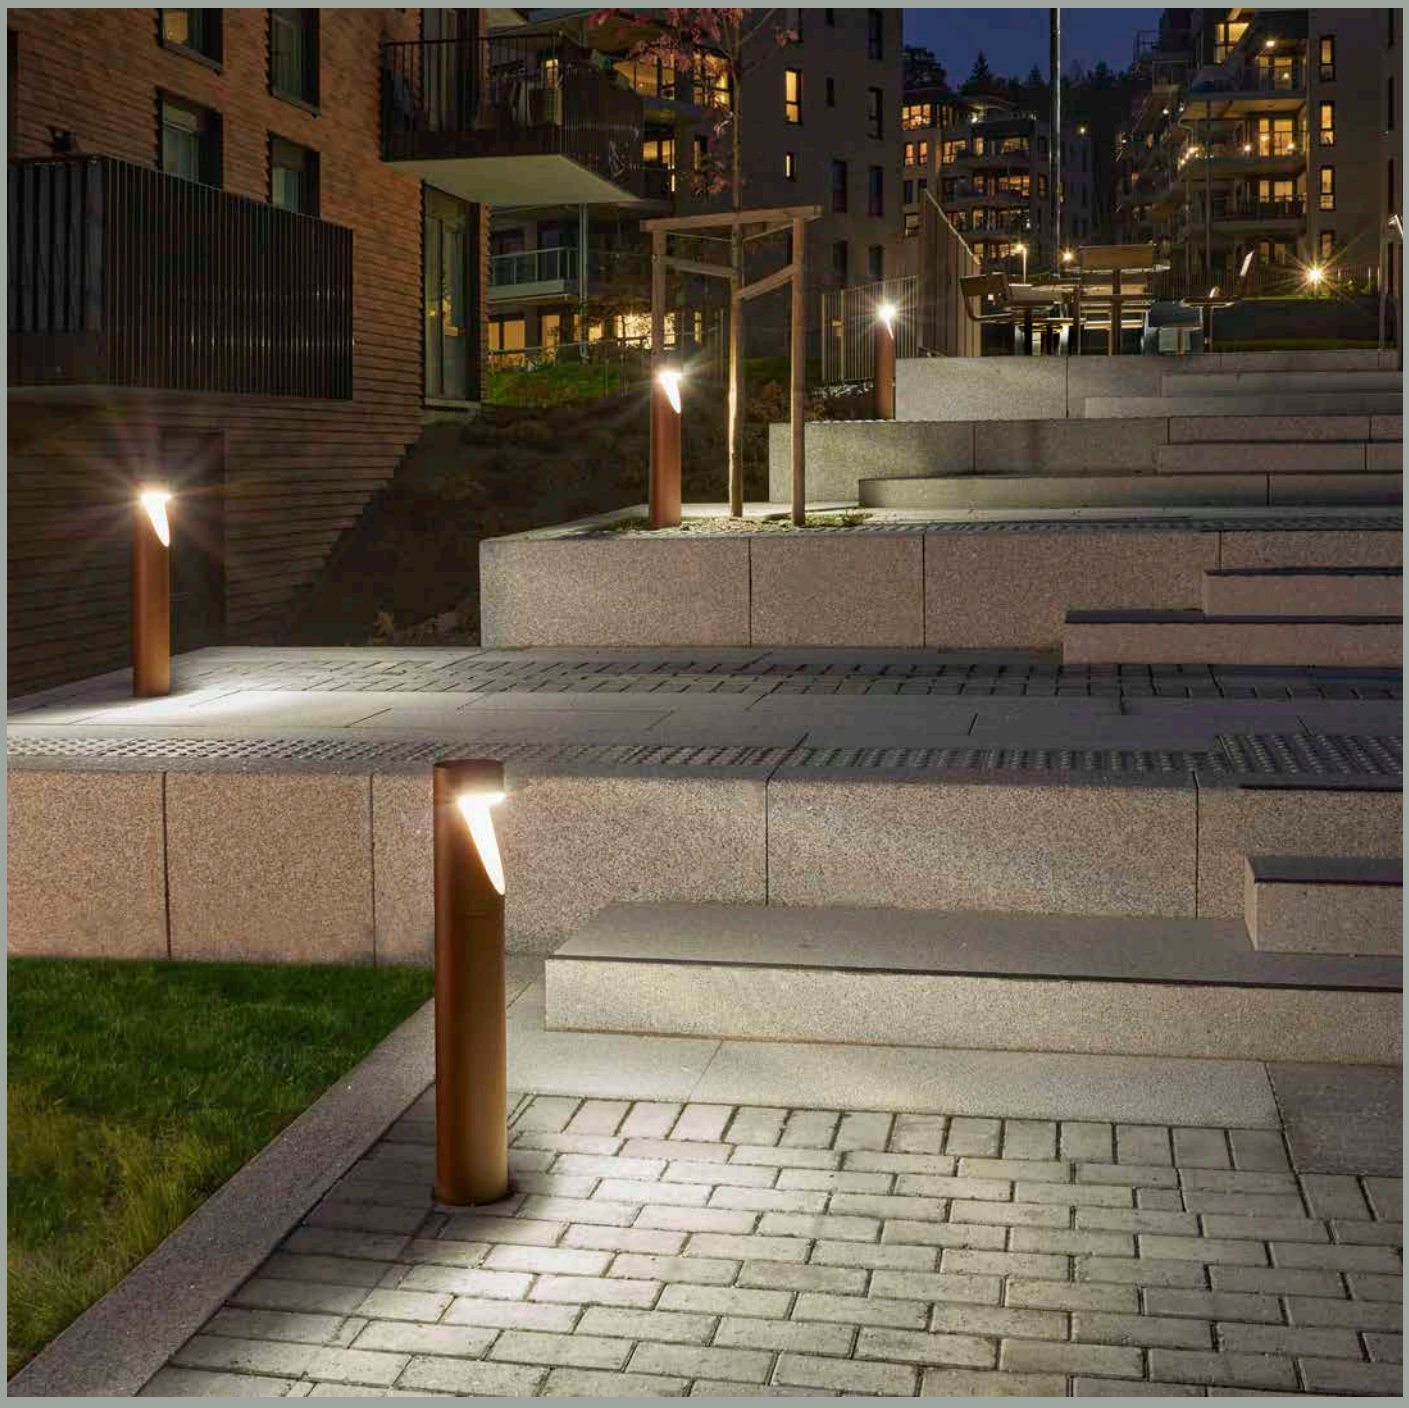





# Rena






**Colour:**


Stainless Steel

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


CE | 220–240V | IK09 | IP68 | 3m | LED | GU10 | DIM | Al | INOX | GL | 36°




Multiple light variants.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 142**
Ground assembly module




**Art. 145**
Hermetic 3-track box




**Art. 146**
Hermetic 3-track box



IP68 IK09 LED GU10 DIM Al INOX GL 3m 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1551ST | LED GU10 | 5,5W | 367lm | 3000K | 40 000 | Dimmable |
| 1553ST | | - | - | - | - | - |
| 1762ST | LED | 4W | 318lm | 3000K | 50 000h | Dimmable |
| 1763ST | | | 369lm | 4000K | | |
| 1766ST | | 8W | 672lm | 3000K | | |
| 1767ST | | | 731lm | 4000K | | |

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.

IP68 IK09 GU10 DIM Al INOX GL 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1641ST | LED GU10 | 5,5W | 367lm | 3000K | 40 000 | Dimmable |
| 1643ST | | - | - | - | - | - |

* For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.

IP68 IK09 LED GU10 DIM Al INOX GL 3m 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1555ST | LED GU10 | 5,5W | 237lm | 3000K | 40 000 | Dimmable |
| 1557ST | | - | - | - | - | - |
| 1752ST | LED | 4W | 178lm | 3000K | 50 000h | Dimmable |
| 1753ST | | | 180lm | 4000K | | |
| 1756ST | | 8,8W | 314lm | 3000K | | |
| 1757ST | | 8,5W | 330lm | 4000K | | |

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.

IP68 IK09 GU10 DIM Al INOX GL 36°*




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1645ST | LED GU10 | 5,5W | 237lm | 3000K | 40 000 | Dimmable |
| 1647ST | | - | - | - | - | - |

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1550ST | LED GU10 | 5,5W | 367lm | 3000K | 40 000 | Dimmable |
| 1552ST | | - | - | - | - | - |
| 1760ST | LED | 4W | 318lm | 3000K | 50 000h | Dimmable |
| 1761ST | | | 369lm | 4000K | | |
| 1764ST | | 8W | 672lm | 3000K | | |
| 1765ST | | | 731lm | 4000K | | |

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1640ST | LED GU10 | 5,5W | 367lm | 3000K | 40 000 | Dimmable |
| 1642ST | | - | - | - | - | - |

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1554ST | LED GU10 | 5,5W | 237lm | 3000K | 40 000 | Dimmable |
| 1556ST | | - | - | - | - | - |
| 1750ST | LED | 4,2W | 178lm | 3000K | > 50 000h | Dimmable |
| 1751ST | | 4W | 180lm | 4000K | | |
| 1754ST | | 8W | 314lm | 3000K | | |
| 1755ST | | | 330lm | 4000K | | |

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier.
For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1644ST | LED GU 10 | 5,5W | 237lm | 3000K | 40 000 | Dimmable |
| 1646ST | | - | - | - | - | - |

For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



# Rena Cover





**Colour:**

- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

CE | 220–240V | IK10 | IP68 | 3m | LED | GU10 | Al | DIM | PC

Multiple light variants.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Wide range of light direction adjustment.

**Accessories:**


**Art. 142**
Power cord cover




**Art. 145**
Hermetic 3-track box




**Art. 146**
Hermetic 3-track box






| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1632BL | LED GU10 | - | - | - | - | - |
| 1632GR | | | | | | |
| 1633BL | | 5,5W | 13lm | 3000K | 40 000 | Dimmable |
| 1633GR | | | | | | |
| 1770BL | LED | 4W | 24lm | 3000K | 50 000h | Dimmable |
| 1770GR | | | | | | |
| 1771BL | | | 25lm | 4000K | | |
| 1771GR | | | | | | |
| 1774BL | | 8,7W | 48lm | 3000K | | |
| 1774GR | | | | | | |
| 1775BL | | 8W | 48lm | 4000K | | |
| 1775GR | | | | | | |




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1630BL | LED GU10 | - | - | - | - | - |
| 1630GR | | | | | | |
| 1631BL | | 5,5W | 13lm | 3000K | 40 000 | Dimmable |
| 1631GR | | | | | | |
| 1768BL | LED | 4W | 24lm | 3000K | 50 000h | Dimmable |
| 1768GR | | | | | | |
| 1769BL | | | 28lm | 4000K | | |
| 1769GR | | | | | | |
| 1772BL | | 8W | 48lm | 3000K | | |
| 1772GR | | | | | | |
| 1773BL | | | 56lm | 4000K | | |
| 1773GR | | | | | | |







| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1650BL | LED GU10 | - | - | - | - | - |
| 1650GR | | | | | | |
| 1651BL | | 5,5W | 13 lm | 3000K | 40 000 | Dimmable |
| 1651GR | | | | | | |







| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1652BL | LED GU10 | - | - | - | - | - |
| 1652GR | | | | | | |
| 1653BL | | 5,5W | 13 lm | 3000K | 40 000 | Dimmable |
| 1653GR | | | | | | |



# Rondane





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 538AL | E27 | - | - | - | - | - |
| 538GR | | | | | | |
| 537AL | LED | 8,5W | 305lm | 3000K | > 110 000h | Dimmable |
| 537GR | | | | | | |
| 539AL | | 17,5W | 732lm | | 50 000h | - |
| 539GR | | | | | | |
| 548AL | | 9,5W | 345lm | | | Motion Detector |
| 548GR | | | | | | |

*All indexes also available in 4000K and 2700K versions.



# Sandvik







**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 148**
Corner bracket for art. 1730, 1731, 1732, 5152




**Art. 131**
Corner bracket for art 1740, 1741, 1742, 5153




IP65 IK08 LED GU10 DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1730AL | LED GU10 | - | - | - | - | - |
| 1730BL | | | | | | |
| 1730GR | | | | | | |
| 1730WH | | | | | | |
| 1731AL | | 7,8W | 420lm | 2700K | 40 000h | Dimmable |
| 1731BL | | | | | | |
| 1731GR | | | | | | |
| 1731WH | | | | | | |
| 1732AL | LED | 16W | 1126lm | 3000K | > 50 000 | |
| 1732BL | | | | | | |
| 1732GR | | | | | | |
| 1732WH | | | | | | |
| 5152AL | | | 1350lm | 4000K | | |
| 5152BL | | | | | | |
| 5152GR | | | | | | |
| 5152WH | | | | | | |

IP65 IK08 LED GU10 DIM Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1740AL | LED GU10 | - | - | - | - | - |
| 1740BL | | | | | | |
| 1740GR | | | | | | |
| 1740WH | | | | | | |
| 1741AL | | 3,9W | 210lm | 2700K | 40 000h | Dimmable |
| 1741BL | | | | | | |
| 1741GR | | | | | | |
| 1741WH | | | | | | |
| 1742AL | LED | 8W | 563lm | 3000K | > 50 000h | |
| 1742BL | | | | | | |
| 1742GR | | | | | | |
| 1742WH | | | | | | |
| 5153AL | | | 675lm | 4000K | | |
| 5153BL | | | | | | |
| 5153GR | | | | | | |
| 5153WH | | | | | | |

# Sandvik



**Colour:**

Aluminium
Graphite
Black
White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 795AL | LED GU10 | - | - | - | - | - |
| 795BL | | | | | | |
| 795GR | | | | | | |
| 795WH | | | | | | |
| 796AL | | 3,9W | 210lm | 2700K | 40 000h | Dimmable |
| 796BL | | | | | | |
| 796GR | | | | | | |
| 796WH | | | | | | |

IP65 IK08 LED DIM PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 2937AL | LED | 7,7W | 730lm | 4000K | >268 210h | Dimmable | IESNA Type II/III |
| 2937BL | | | | | | | |
| 2937GR | | | | | | | |
| 2935AL | | | 699lm | 3000K | | | |
| 2935BL | | | | | | | |
| 2935GR | | | | | | | |
| 2939AL | | | 604lm | | | | IESNA Type V |
| 2939BL | | | | | | | |
| 2939GR | | | | | | | |
| 2941AL | | | 616lm | 4000K | | | |
| 2941BL | | | | | | | |
| 2941GR | | | | | | | |

IP65 IK08 LED DIM PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens | Energy distributor ~230V |
|---|---|---|---|---|---|---|---|---|
| 2945AL | LED | 7,7W | 730lm | 4000K | >268 210h | Dimmable | IESNA Type II/III | E(Uni) |
| 2945BL | | | | | | | | |
| 2945GR | | | | | | | | |
| 2943AL | | | 699lm | 3000K | | | | |
| 2943BL | | | | | | | | |
| 2943GR | | | | | | | | |
| 2947AL | | | 604lm | | | | IESNA Type V | |
| 2947BL | | | | | | | | |
| 2947GR | | | | | | | | |
| 2949AL | | | 616lm | 4000K | | | | |
| 2949BL | | | | | | | | |
| 2949GR | | | | | | | | |

# Skara





**Colour:**

Aluminium
Black
Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaires with energy distributor option.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 2934**
Concreting anchor





# Sande





**Colour:**

- Graphite
- Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

CE · 220–240V · IK08 · IP65 · LED · GU10 · DIM · Al · 5m · GL · 36° · 40°


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Wide range of light direction adjustment.

**Accessories:**

**Art. 1233**
Cap




**Art. 1234**
Ground anchor.



IP65 IK08 LED GU10 DIM 5m GL Al 36° 40°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Light angle |
|---|---|---|---|---|---|---|---|
| 1592BL | LED GU10 | 5,5W | 276lm | 3000K | 40 000 | Dimmable | 36° |
| 1592GR | | | | | | | |
| 1593BL | LED | 8,6W | 566lm | | > 145 000h | | 40° |
| 1593GR | | | | | | | |

IP65 IK08 LED GU10 DIM 5m GL Al 36° 40°




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Light angle |
|---|---|---|---|---|---|---|---|
| 1598BL | LED GU10 | 5,5W | 276lm | 3000K | 40 000 | Dimmable | 36° |
| 1598GR | | | | | | | |
| 1594BL | LED | 8,6W | 738lm | | > 145 000h | | 40° |
| 1594GR | | | | | | | |



# Sol










**Colour:**

Aluminium
Graphite
Black
White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Product Eco-friendly.

**Accessories:**

**Art. 3095**
Distance



IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 4051AL | LED | 19,1W | 2101lm | 3000K | > 100 000h | Dimmable |
| 4051BL | | | | | | |
| 4051GR | | | | | | |
| 4051WH | | | | | | |
| 4052AL | | | 2421lm | 4000K | | |
| 4052BL | | | | | | |
| 4052GR | | | | | | |
| 4052WH | | | | | | |
| 4055AL | | | 2101lm | 3000K | | DALI2 |
| 4055BL | | | | | | |
| 4055GR | | | | | | |
| 4055WH | | | | | | |
| 4056AL | | | 2421lm | 4000K | | |
| 4056BL | | | | | | |
| 4056GR | | | | | | |
| 4056WH | | | | | | |

IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 4053AL | LED | 19,3W | 1655lm | 3000K | > 100 000h | Dimmable |
| 4053BL | | | | | | |
| 4053GR | | | | | | |
| 4053WH | | | | | | |
| 4054AL | | | 1905lm | 4000K | | |
| 4054BL | | | | | | |
| 4054GR | | | | | | |
| 4054WH | | | | | | |
| 4057AL | | | 1663lm | 3000K | | DALI2 |
| 4057BL | | | | | | |
| 4057GR | | | | | | |
| 4057WH | | | | | | |
| 4058AL | | | 1912lm | 4000K | | |
| 4058BL | | | | | | |
| 4058GR | | | | | | |
| 4058WH | | | | | | |

IP65 IK06 LED DIM DALI Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 4043AL | LED | 19,3W | 1938lm | 3000K | > 100 000h | Dimmable |
| 4043BL | | | | | | |
| 4043GR | | | | | | |
| 4043WH | | | | | | |
| 4044AL | | | 2221lm | 4000K | | |
| 4044BL | | | | | | |
| 4044GR | | | | | | |
| 4044WH | | | | | | |
| 4047AL | | | 1924lm | 3000K | | DALI2 |
| 4047BL | | | | | | |
| 4047GR | | | | | | |
| 4047WH | | | | | | |
| 4048AL | | 19,1W | 2227lm | 4000K | | |
| 4048BL | | | | | | |
| 4048GR | | | | | | |
| 4048WH | | | | | | |

IP65 IK06 LED DIM DALI Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 4045AL | LED | 19,3W | 1633lm | 3000K | > 100 000h | Dimmable |
| 4045BL | | | | | | |
| 4045GR | | | | | | |
| 4045WH | | | | | | |
| 4046AL | | 19,1W | 1890lm | 4000K | | |
| 4046BL | | | | | | |
| 4046GR | | | | | | |
| 4046WH | | | | | | |
| 4049AL | | 19,3W | 1618lm | 3000K | | DALI2 |
| 4049BL | | | | | | |
| 4049GR | | | | | | |
| 4049WH | | | | | | |
| 4050AL | | 19,1W | 1866lm | 4000K | | |
| 4050BL | | | | | | |
| 4050GR | | | | | | |
| 4050WH | | | | | | |



# Stavanger





**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 1230**
Concreting anchor




**Art. 1231**
Ground anchor



IP65 IK10 LED DIM DALI Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1240AL | LED | 12,2W | 428lm | 3000K | > 145 000h | Dimmable |
| 1240GR | | | | | | |
| 5008AL | | | 493lm | 4000k | 50 000h | |
| 5008GR | | | | | | |
| 5060AL | | | | | | DALI2/ NightDim |
| 5060GR | | | | | | |
| 5063AL | | | 428lm | 3000K | > 145 000h | |
| 5063GR | | | | | | |

IP65 IK08 LED E27 DIM Al PMMA





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 1243AL | E27 | - | - | - | - | - | I |
| 1243GR | | | | | | | |
| 2240AL | LED | 13,6W | 483lm | 3000K | > 72 000h | Dimmable | II |
| 2240GR | | | | | | | |
| 2241AL | | | 565lm | 4000K | | | |
| 2241GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1244AL | LED | 12,2W | 428lm | 3000K | > 145 000h | Dimmable |
| 1244GR | | | | | | |
| 5009AL | | 11,9W | 530lm | 4000k | 50 000h | |
| 5009GR | | | | | | |
| 5061AL | | 12,2W | 493lm | | | DALI2/ NightDim |
| 5061GR | | | | | | |
| 5064AL | | | 428lm | 3000K | > 145 000h | |
| 5064GR | | | | | | |


IP65 IK08 LED E27 DIM Al PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 1246AL | E27 | - | - | - | - | - | I |
| 1246GR | | | | | | | |
| 2244AL | LED | 13,6W | 483lm | 3000K | > 72 000h | Dimmable | II |
| 2244GR | | | | | | | |
| 2245AL | | | 565lm | 4000K | | | |
| 2245GR | | | | | | | |


## Bollard

IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1247AL | LED | 8,4W | 312lm | 3000K | > 145 000h | Dimmable |
| 1247GR | | | | | | |
| 5010AL | | | 351lm | 4000k | 50 000h | |
| 5010GR | | | | | | |
| 5062AL | | 8,5W | | | | DALI |
| 5062GR | | | | | | |
| 5065AL | | 8,4W | 400lm | 3000K | > 145 000h | |
| 5065GR | | | | | | |

IP65 IK08 LED E27 DIM Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Class |
|---|---|---|---|---|---|---|---|
| 1248AL | E27 | - | - | - | - | - | I |
| 1248GR | | | | | | | |
| 2248AL | LED | 8,9W | 337lm | 3000K | > 72 000h | Dimmable | II |
| 2248GR | | | | | | | |
| 2249AL | | | 403lm | 4000K | | | |
| 2249GR | | | | | | | |





# Voss



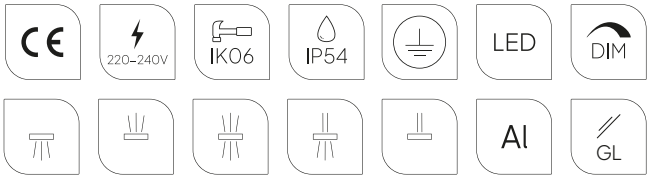




**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Multiple light variants.

IP54 IK06 LED DIM 62° Al GL





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1951AL | LED | 10,8W | 557lm | 3000K | > 171 460 | Dimmable |
| 1951GR | | | | | | |
| 5034AL | | 16,8W | 610lm | 4000K | 50 000 | |
| 5034GR | | | | | | |

IP54 IK06 LED DIM 62° Al GL





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1955AL | LED | 10,5W | 557lm | 3000K | > 102 000h | Dimmable |
| 1955GR | | | | | | |
| 5036AL | | 10,5W | | 4000K | 50 000 | - |
| 5036GR | | | | | | |

IP54 IK06 LED 4° 62° Al GL





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1950AL | LED | 15,4W | 614lm | 3000K | 50 000h | - |
| 1950GR | | | | | | |
| 5032AL | | 16,9W | 655lm | 4000K | > 102 000h | |
| 5032GR | | | | | | |

IP54 IK06 LED 62° 62° Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1952AL | LED | 21W | 1115lm | 3000K | > 102 000h | - |
| 1952GR | | | | | | |
| 5033AL | | | 1077lm | 4000K | | |
| 5033GR | | | | | | |

IP54 IK06 LED DIM 4° Al GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1953AL | LED | 6,4W | 55,7lm | 3000K | > 102 000h | - |
| 1953GR | | | | | | |
| 5128AL | | | 55lm | 4000K | | Dimmable |
| 5128GR | | | | | | |





# Vasa







**Colour:**

- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Multiple light variants.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

IP65 IK08 LED E27 DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 120AL | E27 | - | - | - | - | - |
| 120BL | | | | | | |
| 120GR | | | | | | |
| 120WH | | | | | | |
| 127AL | LED E27 | 8W | 384lm | 2700K | 25 000h | Dimmable |
| 127BL | | | | | | |
| 127GR | | | | | | |
| 127WH | | | | | | |
| 128AL | LED | 8,5W | 631lm | 3000K | > 72 000h | |
| 128BL | | | | | | |
| 128GR | | | | | | |
| 128WH | | | | | | |
| 5019AL | | 8,3W | 668lm | 4000K | > 70 000h | |
| 5019BL | | | | | | |
| 5019GR | | | | | | |
| 5019WH | | | | | | |
| 5093AL | | 9,7W | 670lm | 3000K | | DALI2 |
| 5093BL | | | | | | |
| 5093GR | | | | | | |
| 5093WH | | | | | | |
| 5092AL | | 14,1W | 1039lm | 4000K | | |
| 5092BL | | | | | | |
| 5092GR | | | | | | |
| 5092WH | | | | | | |

IP65 IK08 LED DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 450AL | LED | 6W | 440lm | 3000K | > 102 000h | Dimmable |
| 450BL | | | | | | |
| 450GR | | | | | | |
| 450WH | | | | | | |
| 451AL | | | 457lm | 4000K | | |
| 451BL | | | | | | |
| 451GR | | | | | | |
| 451WH | | | | | | |

IP65 IK08 LED DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 454AL | LED | 6W | 440lm | 3000K | > 102 000h | Dimmable |
| 454BL | | | | | | |
| 454GR | | | | | | |
| 454WH | | | | | | |
| 455AL | | | 457lm | 4000K | | |
| 455BL | | | | | | |
| 455GR | | | | | | |
| 455WH | | | | | | |

# Visby

The city needs light of the right quality and in the right quantity. It needs balance. The Visby model can be an excellent choice here.
Visby is a modernist pole lamp, economical thanks to the LED modules, but also with an excellent ratio of energy consumption to lighting capacity. It is ideal for illuminating streets, built-up areas, parks and squares, where it creates practical yet beautiful lighting. This is complemented by an innovative ring bracket system at the height of the light source and a plane reflection system, which optimally reduces glare and creates a harmonious light beam.





# Visby



Visby mounted on pole 3004, further information on pages 417–418.






**Colour:**

Aluminium

Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Product Eco-friendly.

**Accessories:**

Luminaires sold separately, recommended poles ø60, further information on pages 417– 418.

**Art. 7660**

Reduction for Ø60 luminaires for mounting on the Ø76 pole .



IP65 IK10 LED Al PMMA ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 576AL | LED | 44,5W | 2465lm | 3000K | 50 000h |
| 576GR | | | | | |
| 5002AL | | 43,6W | 2624lm | 4000K | |
| 5002GR | | | | | |



IP65 IK10 LED Al PMMA ∅60




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 577AL | LED | 27W | 1388lm | 3000K | 50 000h |
| 577GR | | | | | |
| 5003AL | | 26,5W | 1553lm | 4000K | |
| 5003GR | | | | | |





# Varberg





**Colour:**

Aluminium

Graphite

Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Multiple light variants.

Fully replaceable electrical kit.


Product Eco-friendly.

**Accessories:**

**Art. 6439**
Special foot.




**Art. 144**
Electric box.



IP65 IK10 LED DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 7150AL | LED | 30W | 3621lm | 3000K | > 100 000h | DALI2/ NightDim | IESNA type IV |
| 7150BL | | | | | | | |
| 7150GR | | | | | | | |
| 7151AL | | | 3843lm | 4000K | | | |
| 7151BL | | | | | | | |
| 7151GR | | | | | | | |

IP65 IK08 LED DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 7152AL | LED | 7,7W | 741lm | 3000K | > 109 000h | Dimmable | IESNA type IV |
| 7152BL | | | | | | | |
| 7152GR | | | | | | | |
| 7153AL | | 7,8W | 742lm | | | DALI2 | |
| 7153BL | | | | | | | |
| 7153GR | | | | | | | |
| 7154AL | | 7,7W | 759lm | 4000K | | Dimmable | |
| 7154BL | | | | | | | |
| 7154GR | | | | | | | |
| 7155AL | | 7,8W | 760lm | | | DALI2 | |
| 7155BL | | | | | | | |
| 7155GR | | | | | | | |

# Trysil

**Thoroughly futuristic, ahead of its time but elegant. Whatever your needs, Trysil is the perfect choice for those who wish to combine modernity with reliability and exceptional style. Trysil is available in bollard and pole versions. It offers a range of state-of-the-art light sources and controls, adapted to the needs of the most demanding users. Trysil family means quality, design and functionality.**





# Trysil










**Colour:**

Aluminium

Graphite

Black


**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**
Concreting anchor





**Art. 1908**
Anchoring support




**Art. 1909**




**Art. 3081**
Special foot



IP65 IK10 LED DIM Al PMMA






| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1097AL | LED | 7,3W | 647lm | 4000K | > 171 460h | Dimmable |
| 1097BL | | | | | | |
| 1097GR | | | | | | |
| 1096AL | | | 620lm | 3000K | > 102 000h | |
| 1096BL | | | | | | |
| 1096GR | | | | | | |
| 1108AL | | 9,5W | 660lm | | 50 000h | - |
| 1108BL | | | | | | |
| 1108GR | | | | | | |
| 1109AL | | | 700lm | 4000K | | |
| 1109BL | | | | | | |
| 1109GR | | | | | | |

IP65 IK10 LED DIM DALI Al PMMA






| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1101AL | LED | 7,4W | 694lm | 4000K | > 109 000h | Dimmable | IESNA type V |
| 1101BL | | | | | | | |
| 1101GR | | | | | | | |
| 1100AL | | | 703lm | 3000K | | | |
| 1100BL | | | | | | | |
| 1100GR | | | | | | | |
| 1102AL | | 8W | 689lm | | | DALI2 | |
| 1102BL | | | | | | | |
| 1102GR | | | | | | | |
| 1103AL | | | 674lm | 4000K | | | |
| 1103BL | | | | | | | |
| 1103GR | | | | | | | |
| 1105AL | LED | 7,4W | 706lm | | | Dimmable | IESNA type II/III |
| 1105BL | | | | | | | |
| 1105GR | | | | | | | |
| 1104AL | | 7,5W | 738lm | 3000K | | | |
| 1104BL | | | | | | | |
| 1104GR | | | | | | | |
| 1106AL | | 8W | 707lm | | | DALI2 | |
| 1106BL | | | | | | | |
| 1106GR | | | | | | | |
| 1107AL | | | 693lm | 4000K | | | |
| 1107BL | | | | | | | |
| 1107GR | | | | | | | |

# Trysil







**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Product Eco-friendly.

**Accessories:**

**Art. 3091**



IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1048AL | LED | 12,5W | 1260lm | 3000K | > 72 000h | Dimmable |
| 1048BL | | | | | | |
| 1048GR | | | | | | |
| 1049AL | | | 1300lm | 4000K | | |
| 1049BL | | | | | | |
| 1049GR | | | | | | |
| 1050AL | | 20W | 1973lm | 3000K | >102 000h | DALI2/ NightDim |
| 1050BL | | | | | | |
| 1050GR | | | | | | |
| 1051AL | | | 2054lm | 4000K | | |
| 1051BL | | | | | | |
| 1051GR | | | | | | |

IP65 IK10 LED DALI Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1055AL | LED | 8,7W | 1141lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1055BL | | | | | | | |
| 1055GR | | | | | | | |
| 1054AL | | 8,4W | 1081lm | 3000K | | | |
| 1054BL | | | | | | | |
| 1054GR | | | | | | | |
| 1058AL | | 8,6W | 1111lm | | | | IESNA type II/III |
| 1058BL | | | | | | | |
| 1058GR | | | | | | | |
| 1059AL | | 8,7W | 1161lm | 4000K | | | |
| 1059BL | | | | | | | |
| 1059GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1001AL | LED | 25W | 2476lm | 4000K | > 102 000h | Dimmable |
| 1001BL | | | | | | |
| 1001GR | | | | | | |
| 1000AL | | | 2433lm | 3000K | | |
| 1000BL | | | | | | |
| 1000GR | | | | | | |
| 1002AL | | 40W | 3901lm | | | DALI2 |
| 1002BL | | | | | | |
| 1002GR | | | | | | |
| 1003AL | | | 4145lm | 4000K | | |
| 1003BL | | | | | | |
| 1003GR | | | | | | |

IP65 IK10 LED DALI Al PC

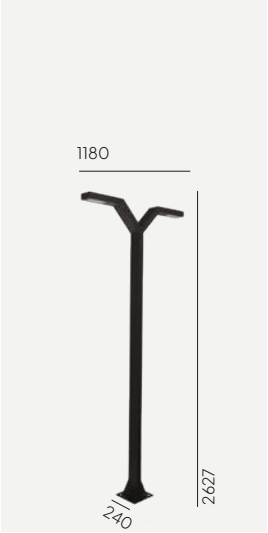


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1007AL | LED | 16,3W | 2377lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1007BL | | | | | | | |
| 1007GR | | | | | | | |
| 1006AL | | | 2282lm | 3000K | | | |
| 1006BL | | | | | | | |
| 1006GR | | | | | | | |
| 1010AL | | | 2216lm | | | | IESNA type II/III |
| 1010BL | | | | | | | |
| 1010GR | | | | | | | |
| 1011AL | | | 2293lm | 4000K | | | |
| 1011BL | | | | | | | |
| 1011GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1060AL | LED | 17W | 1667lm | 3000K | > 102 000h | Dimmable |
| 1060BL | | | | | | |
| 1060GR | | | | | | |
| 1061AL | | | 1719lm | 4000K | | |
| 1061BL | | | | | | |
| 1061GR | | | | | | |
| 1062AL | | 20W | 1973lm | 3000k | | DALI2/ NightDim |
| 1062BL | | | | | | |
| 1062GR | | | | | | |
| 1063AL | | | 2054lm | 4000K | | |
| 1063BL | | | | | | |
| 1063GR | | | | | | |

IP65 IK10 LED DALI DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1012AL | LED | 34W | 3347lm | 3000K | > 102 000h | Dimmable |
| 1012BL | | | | | | |
| 1012GR | | | | | | |
| 1013AL | | 33W | 3448lm | 4000K | | |
| 1013BL | | | | | | |
| 1013GR | | | | | | |
| 1014AL | | 40W | 3901lm | 3000K | | DALI2/ NightDim |
| 1014BL | | | | | | |
| 1014GR | | | | | | |
| 1015AL | | | 4145lm | 4000K | | |
| 1015BL | | | | | | |
| 1015GR | | | | | | |

IP65 IK10 LED DALI Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1067AL | LED | 12,2W | 1705lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1067BL | | | | | | | |
| 1067GR | | | | | | | |
| 1066AL | | | 1638lm | 3000K | | | |
| 1066BL | | | | | | | |
| 1066GR | | | | | | | |
| 1070AL | | | 1594lm | | | | IESNA type II/III |
| 1070BL | | | | | | | |
| 1070GR | | | | | | | |
| 1071AL | | | 1667lm | 4000K | | | |
| 1071BL | | | | | | | |
| 1071GR | | | | | | | |

IP65 IK10 LED DALI Al PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1019AL | LED | 23,3W | 3425lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1019BL | | | | | | | |
| 1019GR | | | | | | | |
| 1018AL | | | 3277lm | 3000K | | | |
| 1018BL | | | | | | | |
| 1018GR | | | | | | | |
| 1022AL | | | 3194lm | | | | IESNA type II/III |
| 1022BL | | | | | | | |
| 1022GR | | | | | | | |
| 1023AL | | | 3308lm | 4000K | | | |
| 1023BL | | | | | | | |
| 1023GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC

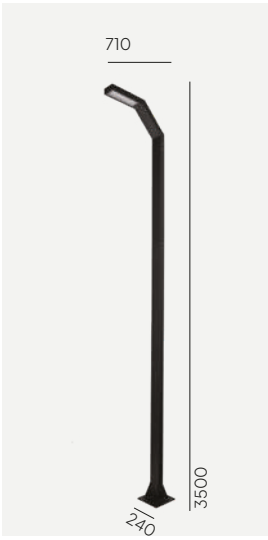



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1072AL | LED | 17W | 1667lm | 3000K | > 102 000h | Dimmable |
| 1072BL | | | | | | |
| 1072GR | | | | | | |
| 1073AL | | | 1719lm | 4000K | | |
| 1073BL | | | | | | |
| 1073GR | | | | | | |

IP65 IK10 LED DIM DALI Al PC

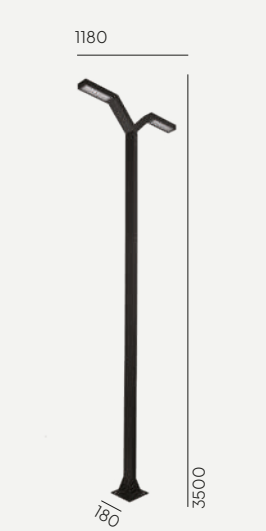



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1024AL | LED | 34W | 3347lm | 3000K | > 102 000h | Dimmable |
| 1024BL | | | | | | |
| 1024GR | | | | | | |
| 1025AL | | | 3448lm | 4000K | | |
| 1025BL | | | | | | |
| 1025GR | | | | | | |
| 1026AL | | 40W | 3901lm | 3000K | | DALI2/ NightDim |
| 1026BL | | | | | | |
| 1026GR | | | | | | |
| 1027AL | | | 4145lm | 4000K | | |
| 1027BL | | | | | | |
| 1027GR | | | | | | |

IP65 IK10 LED DALI Al PC

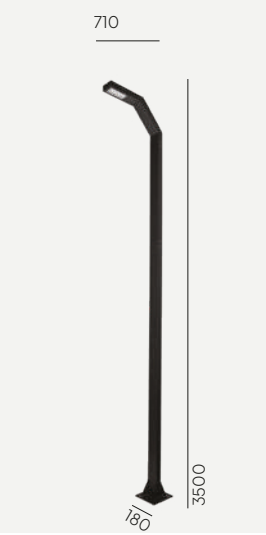



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1079AL | LED | 12,2W | 1705lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1079BL | | | | | | | |
| 1079GR | | | | | | | |
| 1078AL | | | 1638lm | 3000K | | | |
| 1078BL | | | | | | | |
| 1078GR | | | | | | | |
| 1082AL | | | 1594lm | | | | IESNA type II/III |
| 1082BL | | | | | | | |
| 1082GR | | | | | | | |
| 1083AL | | | 1667lm | 4000K | | | |
| 1083BL | | | | | | | |
| 1083GR | | | | | | | |

IP65 IK10 LED DALI Al PC

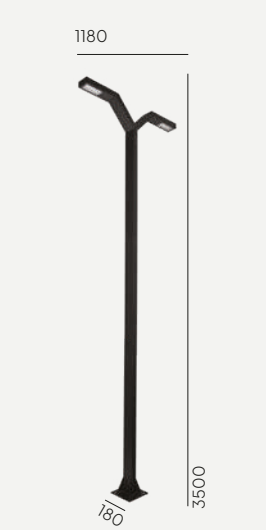



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1031AL | LED | 23,3W | 3425lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1031BL | | | | | | | |
| 1031GR | | | | | | | |
| 1030AL | | | 3277lm | 3000K | | | |
| 1030BL | | | | | | | |
| 1030GR | | | | | | | |
| 1034AL | | | 3194lm | | | | IESNA type II/III |
| 1034BL | | | | | | | |
| 1034GR | | | | | | | |
| 1035AL | | | 3308lm | 4000K | | | |
| 1035BL | | | | | | | |
| 1035GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC

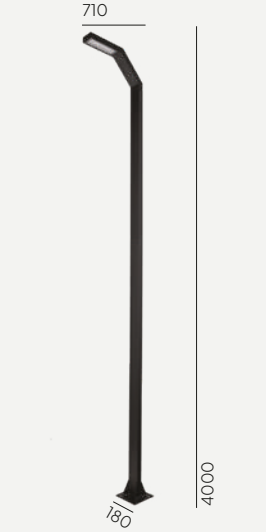



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1084AL | LED | 17W | 1667lm | 3000K | > 102 000h | Dimmable |
| 1084BL | | | | | | |
| 1084GR | | | | | | |
| 1085AL | | | 1719lm | 4000K | | |
| 1085BL | | | | | | |
| 1085GR | | | | | | |
| 1086AL | | 20W | 1973lm | 3000K | | DALI2/ NightDim |
| 1086BL | | | | | | |
| 1086GR | | | | | | |
| 1087AL | | | | 4000K | | |
| 1087BL | | | | | | |
| 1087GR | | | | | | |

IP65 IK10 LED DALI Al PC

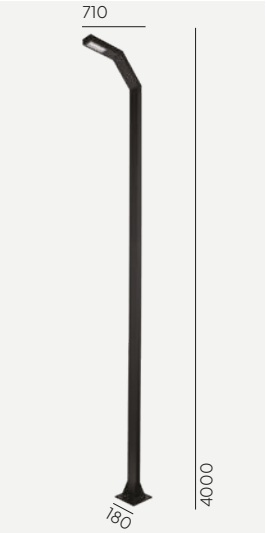



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1091AL | LED | 12,2W | 1705lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1091BL | | | | | | | |
| 1091GR | | | | | | | |
| 1090AL | | | 1638lm | 3000K | | | |
| 1090BL | | | | | | | |
| 1090GR | | | | | | | |
| 1094AL | | | 1594lm | | | | IESNA type II/III |
| 1094BL | | | | | | | |
| 1094GR | | | | | | | |
| 1095AL | | | 1667lm | 4000K | | | |
| 1095BL | | | | | | | |
| 1095GR | | | | | | | |

IP65 IK10 LED DIM DALI Al PC

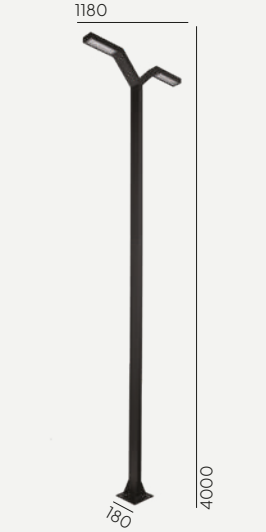


| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1037AL | LED | 34W | 3448lm | 4000K | > 102 000h | Dimmable |
| 1037BL | | | | | | |
| 1037GR | | | | | | |
| 1036AL | | | 3347lm | 3000K | | |
| 1036BL | | | | | | |
| 1036GR | | | | | | |
| 1038AL | | 40W | 3901lm | | | DALI2 |
| 1038BL | | | | | | |
| 1038GR | | | | | | |
| 1039AL | | | 4145lm | 4000K | | |
| 1039BL | | | | | | |
| 1039GR | | | | | | |

IP65 IK10 LED DALI Al PC

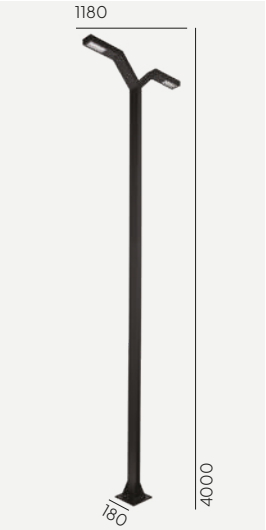



| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Lens |
|---|---|---|---|---|---|---|---|
| 1043AL | LED | 23,3W | 3425lm | 4000K | > 100 000h | DALI2/ NightDim | IESNA type V |
| 1043BL | | | | | | | |
| 1043GR | | | | | | | |
| 1042AL | | | 3277lm | 3000K | | | |
| 1042BL | | | | | | | |
| 1042GR | | | | | | | |
| 1046AL | | | 3194lm | | | | IESNA type II/III |
| 1046BL | | | | | | | |
| 1046GR | | | | | | | |
| 1047AL | | | 3308lm | 4000K | | | |
| 1047BL | | | | | | | |
| 1047GR | | | | | | | |



# Bergen



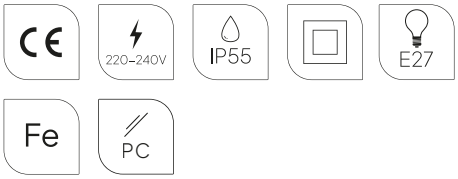



**Colour:**

Black

Galvanized



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 153**
Corner bracket




**Art. 159**
Spacer



IP55 | E27 | Fe | PC




| Art | Type of light source |
|---|---|
| 270BL | E27 |
| 270GA | |

IP55 | E27 | Fe | PC




| Art | Type of light source |
|---|---|
| 271BL | E27 |
| 271GA | |



# Bergen





220–240V
IP55
E27
PC
Fe

**Colour:**

Black
Galvanized

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.



IP54 IK10 E27 LED DIM Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 611BL | E27 | - | - | - | - | - |
| 611WH | | | | | | |
| 615BL | LED E27 | LED max 9W | 240lm | 2700K | 25 000h | Dimmable |
| 615WH | | | | | | |
| 617BL | LED | 8W | 185lm | 3000K | 50 000h | |
| 617WH | | | | | | |
| 618BL | | 10W | - | | | - |
| 618WH | | | | | | |

# Berlin





**Colour:**

Black

White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Product Eco-friendly.




| Art | Type of light source |
|---|---|
| 610BL | E27 |
| 610WH | |




IP54 IK10 E27 LED DIM Fe PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 631BL | E27 | - | - | - | - | - |
| 631GA | | | | | | |
| 637BL | LED | 8W | 364lm | 3000K | 50 000h | Dimmable |
| 637GA | | | | | | |
| 638BL | | 10W | 532lm | | | |
| 638GA | | | | | | |

# Bremen





**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.




| Art | Type of light source |
|---|---|
| 630BL | E27 |
| 630GA | |


NORLYS

# Freja





**Colour:**

Black

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.




| Art | Type of light source | Watt |
|---|---|---|
| 1980BL | E27 | 2,2W |



Photo: Studio Fulgseth

# Lofoten





**Colour:**

Black

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

IP44 IK10 E27 Fe GL




| Art | Type of light source |
|---|---|
| 1940BL | E27 |

IP44 IK10 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 1960BL | E27 |



# Lofoten







**Colour:**

Black


Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 155**
Corner bracket



IP44 E27 GL




| Art | Type of light source |
|---|---|
| 1939BL | E27 |

IP44 E27 GL




| Art | Type of light source |
|---|---|
| 1949BL | E27 |

IP44 E27 PMMA




| Art | Type of light source |
|---|---|
| 1963BL | E27 |

IP44 E27 PMMA




| Art | Type of light source |
|---|---|
| 1969BL | E27 |



# Lofoten





**Colour:**

Black

220–240V IP44 E27 Fe GL

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

IP44 E27 GL




| Art | Type of light source |
|---|---|
| 1944BL | E27 |

IP44 E27 GL




| Art | Type of light source |
|---|---|
| 1945BL | E27 |

# Lofoten





**Colour:**

Black

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).




| Art | Type of light source |
|---|---|
| 1942BL | E27 |




| Art | Type of light source |
|---|---|
| 1962BL | E27 |



# Lofoten





**Colour:**

Black

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).




| Art | Type of light source |
|---|---|
| 1941BL | E27 |




| Art | Type of light source |
|---|---|
| 1961BL | E27 |



# Lofoten





**Colour:**

Black

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).





| Art | Type of light source |
|---|---|
| 1946BL | E27 |




| Art | Type of light source |
|---|---|
| 1966BL | E27 |

IP44 E27 GL Fe

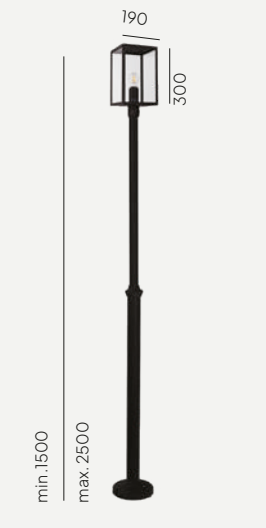


| Art | Type of light source |
|---|---|
| 1948BL | E27 |

IP44 E27 GL Fe




| Art | Type of light source |
|---|---|
| 1947BL | E27 |

IP44 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 1968BL | E27 |

# Lofoten





**Colour:**

Black


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 405**
Concreting anchor




**Art. 406**
Ground anchor



IP55 E27 PC Fe




| Art | Type of light source |
|---|---|
| 690BL | E27 |
| 690GA | |



# Larvik





**Colour:**

Black

Galvanized


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 153**
Mounting corner




**Art. 159**
Luminaire mounting distance





IP55 | E27 | PC | Fe




| Art | Type of light source |
|---|---|
| 240BL | E27 |
| 240GA | |

# Oslo



CE 220-240V IP55 E27 Fe PC

**Colour:**

Black

Galvanized


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 153**
Mounting corner




**Art. 159**
Luminaire mounting distance





# Oslo



220–240V IP55 E27 Fe PC

**Colour:**

Black Galvanized

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

IP55 E27 PC Fe




| Art | Type of light source |
|---|---|
| 245BL | E27 |
| 245GA | |



# Oslo





**Colour:**

- Black
- Galvanized


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 405**
Concreting anchor.




**Art. 406**
Ground anchor.



IP55 E27 PC Fe




| Art | Type of light source |
|---|---|
| 242BL | E27 |
| 242GA | |



# Oslo



220–240V IP55 E27 Fe PC

**Colour:**

Black

Galvanized

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

IP55 E27 PC Fe




| Art | Type of light source |
|---|---|
| 240A/BL | E27 |
| 240A/GA | |



IP54 IK10 E27 LED DIM PC Fe




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 220BL | E27 | - | - | - | - | - |
| 220GA | | | | | | |
| 1600BL | LED | 8W | 240lm | 3000K | 50 000h | Dimmable |
| 1600GA | | | | | | |
| 5110BL | | 8W | 250lm | 4000K | | |
| 5110GA | | | | | | |

# Stockholm





**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).




| Art | Type of light source |
|---|---|
| 226BL | E27 |
| 226GA | |



# Stockholm & Stockholm Big





**Colour:**

- Black
- Galvanized

CE · 220–240V · IP54 · Fe · E27 · PMMA


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 153**
Corner bracket




**Art. 159**
Spacer




IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 286BL | E27 |
| 286GA | |

IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 280BL | E27 |
| 280GA | |







# Stockholm








**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 205**
Concreting anchor.




**Art. 206**
Anchoring support



IP65 IK10 E27 LED DIM DALI PMMA Fe





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 288BL | E27 | - | - | - | - | - |
| 288GA | | | | | | |
| 1464BL | LED E27 | 5,9W | 100lm | 2700K | 25 000h | Dimmable |
| 1464GA | | | | | | |
| 1265BL | LED | 8,5W | 342lm | 3000K | 50 000h | |
| 1265GA | | | | | | |

IP65 IK10 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 297BL | E27 |
| 297GA | |

IP65 IK10 E27 LED DIM DALI PMMA Fe




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 289BL | E27 | - | - | - | - | - |
| 289GA | | | | | | |
| 1469BL | LED E27 | 5,9W | 100lm | 2700K | 25 000h | Dimmable |
| 1469GA | | | | | | |
| 1260BL | LED | 8,5W | 342lm | 3000K | > 50 000h | |
| 1260GA | | | | | | |
| 1606BL | | | 362lm | 4000K | | |
| 1606GA | | | | | | |


IP65 IK10 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 298BL | E27 |
| 298GA | |

## Bollard

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 299BL | E27 | - | - | - | - | - |
| 299GA | | | | | | |
| 1269BL | LED E27 | 5,9W | 100lm | 2700K | 25 000h | Dimmable |
| 1269GA | | | | | | |





# Stockholm

scandinavian wood







**Colour:**

- Black
- Galvanized

**Wood:**

- Impregnated
- Painted

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaire housing made of natural wood.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 205**
Concreting anchor.




**Art. 206**
Anchoring support



IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1423BL | E27 |
| 1423GA | |

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1433BL | E27 |
| 1433GA | |

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1420BL | E27 |
| 1420GA | |

IP65 IK10 E27 LED DIM Fe PMMA




| Art | Type of light source |
|---|---|
| 1430BL | E27 |
| 1430GA | |





# Stockholm & Stockholm Big





**Colour:**

Black

Galvanized


CE | 220–240V | IP54 | Fe | E27 | PMMA

Luminaire suitable for extreme conditions.

Product Eco-friendly.

Double corrosion protection (galvanising+powder coating).

IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 284BL | E27 |
| 284GA | |

IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 285BL | E27 |
| 285GA | |

IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 287BL | E27 |
| 287GA | |





# Stockholm Big





220-240V IP54 Fe E27 PMMA

**Colour:**

- Black
- Galvanized


Luminaire suitable for extreme conditions.

Product Eco-friendly.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 405**
Concreting anchor.




**Art. 406**
Ground anchor.



IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 281BL | E27 |
| 281GA | |

IP54 E27 PMMA Fe




| Art | Type of light source |
|---|---|
| 283BL | E27 |
| 283GA | |





# Arvika







**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaires with energy distributor option.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 208**
Concreting anchor.




**Art. 207**
.



IP44 IK10 E27 LED PC Fe




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 891BL<br>891GA | LED | 8,8W | 543lm | 3000K | > 102 000h |

IP44 IK10 E27 LED PC Fe




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Energy distributor ~230V |
|---|---|---|---|---|---|---|
| 893BL<br>893GA | LED | 8,8W | 543lm | 3000K | > 102 000h | F (SHUKO) |





# Basel










**Colour:**

- Black
- Aluminium
- Galvanized
- Stainless Steel

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

IP54 IK07 E27 GL Fe




| Art | Type of light source |
|---|---|
| 660BL | E27 |
| 660GA | |
| 660ST | |

IP54 IK07 E27 LED DIM GL Fe




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 661BL | E27 | - | - | - | - | - |
| 661GA | | | | | | |
| 661ST | | | | | | |
| MD661BL | | | | | | Motion Detector |
| MD661GA | | | | | | |
| MD661ST | | | | | | |
| 668BL | LED | 5,2W | 483lm | 3000K | > 70 000 | Dimmable |
| 668GA | | | | | | |
| 668ST | | | | | | |
| 671BL | | 9,5W | - | | 50 000h | Motion Detector |
| 671GA | | | | | | |
| 671ST | | | | | | |
| 672BL | | | - | 4000K | | |
| 672GA | | | | | | |
| 672ST | | | | | | |





# Bern










**Colour:**

- Black
- Aluminium
- Galvanized
- Stainless Steel

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

IP54 IK07 E27 GL Fe




| Art | Type of light source |
|---|---|
| 650BL | E27 |
| 650GA | |
| 650ST | |

IP54 IK07 E27 LED DIM GL Fe





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 651BL | E27 | - | - | - | - | - |
| 651GA | | | | | | |
| 651ST | | | | | | |
| 655BL | LED | 5,2W | 477lm | 3000K | > 72 000 | Dimmable |
| 655GA | | | | | | |
| 655ST | | | | | | |
| 675BL | | 11,2W | 819lm | | 50 000h | Motion Detector |
| 675GA | | | | | | |
| 675ST | | | | | | |
| 676BL | | | 878lm | 4000K | | |
| 676GA | | | | | | |
| 676ST | | | | | | |





# Boden



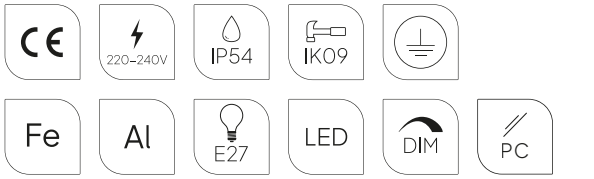






**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K


*2700K on request only, contact your supplier.

Energy under control (mainly energy--saving solutions - control, dimming, motion-dusk sensor).

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

IP54 IK09 E27 Fe Al PC




| Art | Type of light source |
|---|---|
| 862BL | E27 |
| 862GA | |

IP54 IK09 E27 LED DIM Fe Al PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 860BL | E27 | - | - | - | - | - |
| 860GA | | | | | | |
| 866BL | LED | 8W | 307lm | 3000K | 50 000h | Dimmable |
| 866GA | | | | | | |
| 5109BL | | | - | 4000K | | |
| 5109GA | | | | | | |








# Karlstad



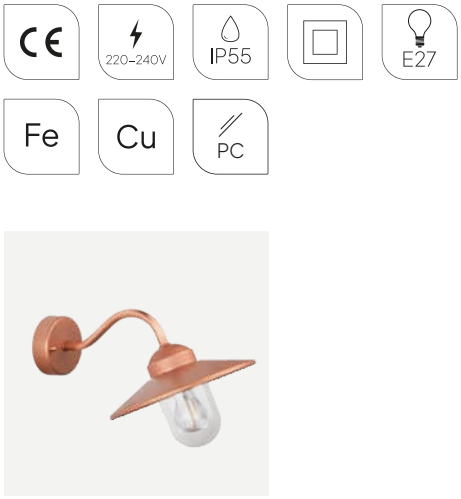

220–240V
IP55
E27
Fe
Cu
PC

**Colour:**

- Black
- Copper
- Galvanized
- White


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Product Eco-friendly.

**Accessories:**

**Art. 153**
Mounting corner




**Art. 159**
Luminaire mounting distance



IP55 | E27 | Fe | Cu | PC




| Art | Type of light source |
|---|---|
| 230BL | E27 |
| 230CO | |
| 230GA | |
| 230WH | |

IP55 | E27 | Fe | PC




| Art | Type of light source |
|---|---|
| 230A/BL | E27 |
| 230A/GA | |
| 230A/WH | |



# Karlstad



CE
220–240V
IP55
Fe
E27
PMMA

**Colour:**

- Black
- White
- Galvanized

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

IP55 E27 Fe PC




| Art | Type of light source |
|---|---|
| 2033BL | E27 |
| 2033GA | |

IP55 E27 Fe PC




| Art | Type of light source |
|---|---|
| 2032BL | E27 |
| 2032GA | |

# Karlstad





220-240V IP55 Fe E27 PMMA

**Colour:**

Black

Galvanized


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 405**
Concreting anchor.





**Art. 406**
Ground anchor.





IP55 | E27 | Fe | PC




| Art | Type of light source |
|---|---|
| 290BL | E27 |
| 290GA | |

# Lund





CE 220-240V IP55 Fe E27 PC

**Colour:**

Black

Galvanized


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 153**
Mounting corner




**Art. 159**
Luminaire mounting distance





# Lund



CE 220-240V IP55 E27 PC Fe

**Colour:**

Black

Galvanized


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 405**
Concreting anchor.




**Art. 406**
Ground anchor.



IP55 E27 Fe PC




| Art | Type of light source |
|---|---|
| 274BL | E27 |
| 274GA | |

IP55 E27 Fe PC




| Art | Type of light source |
|---|---|
| 275BL | E27 |
| 275GA | |

# Mandal

An intriguing as well as functional and durable wall fixture. Scandinavian style is not only about design, but also about usability. Materials used to construct Mandal are robust and easy to maintain. Harmonious beam of light through the glass panes. It is a truly versatile luminaire that meets lighting requirements of contemporary architecture. Minimalism can be the perfect solution for any space, adding sophistication and unique character. Mandal harmonises perfectly with any type of building, but particularly in the galvanised version matches perfectly modern or industrial style.





# Mandal










**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Product Eco-friendly.

**Accessories:**

**Art. 130**
Corner bracket
Art.1373, 1374




**Art. 149**
Corner bracket
Art.1370, 1371



IP44 IK08 GU10 DIM Fe GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1370BL | LED GU10 | 7,8W | 500lm | 2700K | 40 000h | Dimmable |
| 1370GA | | | | | | |
| 1371BL | LED GU10 | - | - | - | - | - |
| 1371GA | | | | | | |

IP44 IK08 GU10 DIM Fe GL




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1373BL | LED GU10 | 3,9W | 250lm | 2700K | 40 000h | Dimmable |
| 1373GA | | | | | | |
| 1374BL | LED GU10 | - | - | - | - | - |
| 1374GA | | | | | | |



# Paris

Fashionable and elegant as a Parisian – a wall fixture that combines minimalist, industrial design and excellent functionality. Ideal for illuminating buildings and fence posts. Paris is also perfect for illuminating a house number plate. Four colour options allow for perfect match with any surroundings, both copper and galvanised versions will add exceptional character to any façade.





# Paris





220–240V
IP43
Fe
LED
E27
DIM
Cu
PC

**Colour:**

Black

Galvanized

White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

IP43 | E27 | LED | DIM | Fe | Cu | PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 160BL | E27 | - | - | - | - | - |
| 160GA | | | | | | |
| 160WH | | | | | | |
| 1495BL | LED | 5,2W | 508lm | 3000K | > 70 000h | Dimmable |
| 1495GA | | | | | | |
| 1495WH | | | | | | |
| 5038BL | | 5,4W | 476lm | 4000K | | |
| 5038GA | | | | | | |
| 5038WH | | | | | | |

IP43 | E27 | LED | DIM | Fe | PC





| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 163BL | E27 | - | - | - | - | - |
| 163GA | | | | | | |
| 163WH | | | | | | |
| 1496BL | LED | 5,2W | 471lm | 3000K | > 70 000h | Dimmable |
| 1496GA | | | | | | |
| 1496WH | | | | | | |
| 5039BL | | 5,4W | 438lm | 4000K | | |
| 5039GA | | | | | | |
| 5039WH | | | | | | |



# Paris Big



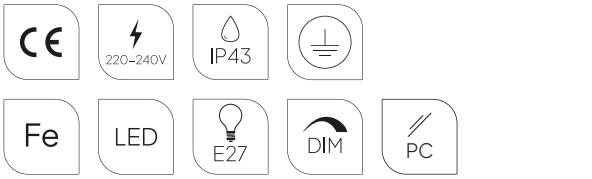






**Colour:**

Black
White
Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.



IP44 | IK09 | LED | DIM | Fe | PC




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control |
|---|---|---|---|---|---|---|
| 1392BL | LED | 5,2W | 346lm | 3000K | > 70 000h | Dimmable |
| 1392GA | | | | | | |
| 5113BL | | 5,4W | 432lm | 4000K | | |
| 5113GA | | | | | | |

# Ski





**Colour:**

Black

Galvanized

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

Luminaires with energy distributor option.adjustmen

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Light control | Energy distributor ~230V |
|---|---|---|---|---|---|---|---|
| 1390BL<br>1390GA | LED | 5,2W | 371lm | 3000K | > 70 000h | Dimmable | F (SCHUKO) |



# Vansbro



220–240V
IP55
E27
PC
Fe
Cu

**Colour:**

Black
Copper
Galvanized


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 153**
Mounting corner.




**Art. 159**
Luminaire mounting distance.



IP55 E27 PC Fe Cu




| Art | Type of light source |
|---|---|
| 1920BL | E27 |
| 1920CO | |
| 1920GA | |



# Chelsea

Chelsea is craftsmanship, perfect workmanship and hand-blended polished copper, the result is a distinguished lighting charm. The exclusive Chelsea family offers traditional design and exceptional aesthetics. All the luminaires in the wide range are ideal for lighting entrances, terraces, walkways, driveways, gardens, fence posts. The unique style of these lamps will satisfy even the most demanding customers. An important feature of Chelsea to bear in mind that in natural weather conditions the bodies are covered with a noble patina.





# Chelsea





**Colour:**

Copper

CE | 220–240V | IP44 | E27 | Cu | PC


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Handmade product (artisanal method).

IP44 | E27 | Cu | PC




| Art | Type of light source |
|---|---|
| 950CO | E27 |

IP44 | E27 | Cu | PC




| Art | Type of light source |
|---|---|
| 962CO | E27 |

IP44 | E27 | Cu | PC




| Art | Type of light source |
|---|---|
| 963CO | E27 |





# Chelsea & Chelsea Big





**Colour:**

Copper

CE | 220–240V | IP44 | E27 | Cu | PC

Product Eco-friendly.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Handmade product (artisanal method).

**Accessories:**

**Art. 152**
Mounting corner.
For Art. 954, Art. 960




IP44 | E27 | Cu | PC





| Art | Type of light source |
|---|---|
| 955CO | E27 |

IP44 | E27 | Cu | PC





| Art | Type of light source |
|---|---|
| 964CO | E27 |

IP44 | E27 | Cu | PC




| Art | Type of light source |
|---|---|
| 954CO | E27 |

IP44 | E27 | Cu | PC




| Art | Type of light source |
|---|---|
| 960CO | E27 |





# Chelsea & Chelsea Big





**Colour:**

Copper

Cu PC CE 220-240V IP44 E27

Product Eco-friendly.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Handmade product (artisanal method).

**Accessories:**

**Art. 307**
Concreting anchor.



IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 941CO | E27 |

IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 957CO | E27 |

IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 940CO | E27 |

IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 956CO | E27 |

# Chelsea



CE 220–240V IP44 E27 Cu PC

**Colour:**

Copper

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Handmade product (artisanal method).

IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 961CO | E27 |



IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 951CO | E27 |

IP44 E27 Cu PC




| Art | Type of light source |
|---|---|
| 953CO | E27 |

# Chelsea





**Colour:**
Copper

Product Eco-friendly.


Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.


Handmade product (artisanal method).

**Accessories:**


**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.




**Art. 108**
Anchoring support.



IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 310BL | E27 |
| 310WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 311BL | E27 |
| 311WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 360BL | E27 |
| 360WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 361BL | E27 |
| 361WH | |

# Bologna





**Colour:**

Black White


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Mounting corner





# Bologna





CE 220-240V IP54 E27 Al PMMA

**Colour:**

Black White


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Mounting corner



IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 312BL | E27 |
| 312WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 313BL | E27 |
| 313WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 314BL | E27 |
| 314WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 315BL | E27 |
| 315WH | |





# Bologna





**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 108**
Anchoring support.




**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.



IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 362BL | E27 |
| 362WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 363BL | E27 |
| 363WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 364BL | E27 |
| 364WH | |

IP54 E27 PMMA Al




| Art | Type of light source |
|---|---|
| 365BL | E27 |
| 365WH | |





IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 370BL | E27 |
| 370WH | |

# Como



220-240V IP54 E27 Al PC

**Colour:**

Black White


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Mounting corner.



IP54 E27 PC Al





| Art | Type of light source |
|---|---|
| 375BL | E27 |
| 375WH | |



# Como



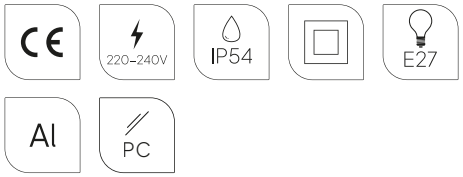


**Colour:**


Black White



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Concreting anchor.





# Como





220-240V IP54 E27 Al PC

**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 108**
Anchoring support.




**Art. 305**
Concreting anchor.





**Art. 306**
Ground anchor.



# Como

IP54 E27 PC Al

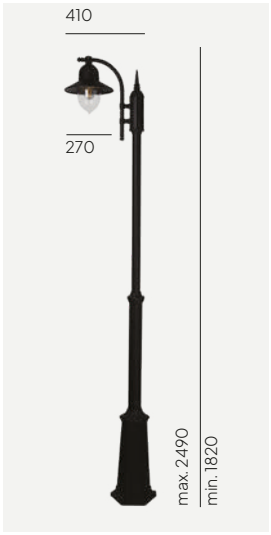



| Art | Type of light source |
|---|---|
| 371BL | E27 |
| 371WH | |

IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 372BL | E27 |
| 372WH | |

IP54 E27 PC Al

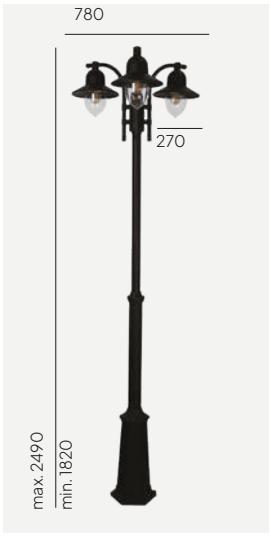


| Art | Type of light source |
|---|---|
| 373BL | E27 |
| 373WH | |

# Florence



CE 220-240V IP54 E27 Al PC

**Colour:**

Black White


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Mounting corner.



IP54 E27 PC Al





| Art | Type of light source |
|---|---|
| 800BL | E27 |
| 800WH | |



# Florence



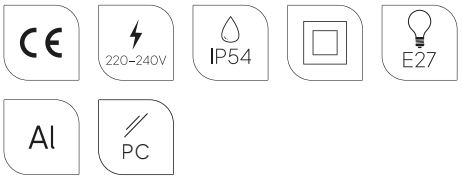


**Colour:**


Black White




Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




| Art | Type of light source |
|---|---|
| 800A/BL | E27 |
| 800A/WH | |




IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 805BL | E27 |
| 805WH | |

# Florence



CE 220-240V IP54 E27 Al PC

**Colour:**

Black White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Concreting anchor.




IP54 E27 PC Al

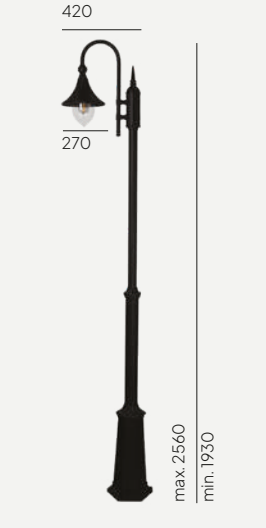


| Art | Type of light source |
|---|---|
| 810BL | E27 |
| 810WH | |

IP54 E27 PC Al

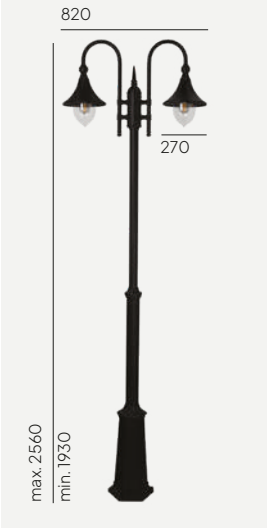


| Art | Type of light source |
|---|---|
| 820BL | E27 |
| 820WH | |

IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 830BL | E27 |
| 830WH | |

# Florence





Colour:

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 108**
Anchoring support.




**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.






# Genoa & Genoa Mini





**Colour:**

- Black
- White

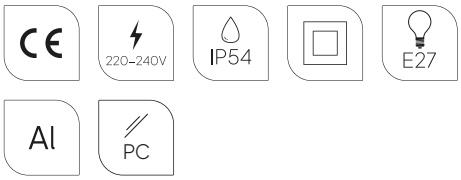




Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.







| Art | Type of light source |
|---|---|
| 170BL<br>170WH | E27 |







| Art | Type of light source |
|---|---|
| 175BL<br>175WH | E27 |



# Glasgow



220-240V IP54 E27 Al PC

**Colour:**

- Black
- White

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

IP54 E27 PC Al





| Art | Type of light source |
|---|---|
| 730BL | E27 |
| 730WH | |



# London



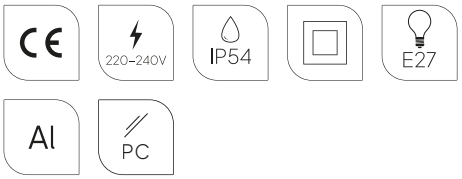


**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




| Art | Type of light source |
|---|---|
| 497BL | E27 |
| 497WH | |



# London Big





**Colour:**

- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

CE | 220–240V | IP54 | IP54/65 | Al | PC | LED | E27


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Mounting corner.



IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 490BL | E27 |
| 490WH | |

IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 493BL | E27 |
| 493WH | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4116BL | LED | 9,5W | 757lm | 3000K | 50 000h |
| 4116WH | | | | | |
| 4117BL | | | 805lm | 4000K | |
| 4117WH | | | | | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4118BL | LED | 14,6W | 1716lm | 3000K | 50 000h | IESNA type V |
| 4118WH | | | | | | |
| 4119BL | | | 1767lm | 4000K | | |
| 4119WH | | | | | | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4136BL | LED | 9,5W | 757lm | 3000K | 50 000h |
| 4136WH | | | | | |
| 4137BL | | | 805lm | 4000K | |
| 4137WH | | | | | |

IP54/65 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4138BL | LED | 14,6W | 1716lm | 3000K | 50 000h | IESNA type V |
| 4138WH | | | | | | |
| 4139BL | | | 1767lm | 4000K | | |
| 4139WH | | | | | | |



IP54 | E27 | PC | Al




| Art | Type of light source |
|---|---|
| 480BL | E27 |
| 480WH | |

IP54 | E27 | PC | Al




| Art | Type of light source |
|---|---|
| 481BL | E27 |
| 481WH | |

# London





**Colour:**

- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

CE | 220–240V | IP54 | IP54/65 | Al | PC | LED | E27


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Mounting corner.





IP54/65 E27 LED AI




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4140BL | LED | 17,5W | 1392lm | 3000K | 50 000h | - |
| 4140WH | | | | | | |
| 4141BL | | | | 4000K | | |
| 4141WH | | | | | | |
| 4142BL | | 14,6W | 1716lm | 30000K | | IESNA type V |
| 4142WH | | | | | | |

# London & London Big





**Colour:**

- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.

CE | 220–240V | IP54 | IP54/65 | Al | PC | E27 | LED

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

IP54 | E27 | Al | PC




| Art | Type of light source |
|---|---|
| 481A/BL | E27 |
| 481A/WH | |

IP54 | E27 | Al | PC




| Art | Type of light source |
|---|---|
| 493A/BL | E27 |
| 493A/WH | |


72

# London & London Big





**Colour:**

- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


CE | 220-240V | IP54 | LED | Al | PC | E27



Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Concreting anchor.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 484BL | E27 |
| 484WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 485BL | E27 |
| 485WH | |

IP54 E27 PC Al




| Art | Type of light source |
|---|---|
| 494BL | E27 |
| 494WH | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4144BL | LED | 9,3W | 756lm | 3000K | 50 000h |
| 4144WH | | | | | |





# London & London Big







**Colour:**

- Black
- White

**Colour temperature:**

2700K* 3000K 4000K

*2700K on request only, contact your supplier.


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 108**
Anchoring support.




**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 482BL | E27 |
| 482WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 483BL | E27 |
| 483WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 491BL | E27 |
| 491WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 492BL | E27 |
| 492WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 495BL | E27 |
| 495WH | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4124BL | LED | 17,5W | 1392lm | 3000K | 50 000h |
| 4124WH | | | | | |
| 4125BL | | | | 4000K | |
| 4125WH | | | | | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4128BL | LED | 19W | 1514lm | 3000K | 50 000h |
| 4128WH | | | | | |
| 4129BL | | | 1514lm | 4000K | |
| 4129WH | | | | | |

IP54 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 |
|---|---|---|---|---|---|
| 4132BL | LED | 28,5W | 2271lm | 3000K | 50 000h |
| 4132WH | | | | | |
| 4133BL | | | 2271lm | 4000K | |
| 4133WH | | | | | |

IP54/65 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4126BL | LED | 14,6W | 1716lm | 3000K | > 120 000h | IESNA type V |
| 4126WH | | | | | | |
| 4127BL | | | 1767lm | 4000K | | |
| 4127WH | | | | | | |

IP54/65 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4130BL | LED | 29,2W | 3422lm | 3000K | > 120 000h | IESNA type V |
| 4130WH | | | | | | |
| 4131BL | | | 3534lm | 4000K | | |
| 4131WH | | | | | | |

IP54/65 LED Al




| Art | Type of light source | Watt | Luminous flux | Colour temperature | L70/B50 | Lens |
|---|---|---|---|---|---|---|
| 4134BL | LED | 43,8W | 5148lm | 3000K | > 120 000h | IESNA type V |
| 4134WH | | | | | | |
| 4135BL | | | 5301lm | 4000K | | |
| 4135WH | | | | | | |

# Latina





**Colour:**

- Black
- White

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.




| Art | Type of light source |
|---|---|
| 105BL | E27 |
| 105WH | |




# Modena & Modena Big





**Colour:**

- Black
- White

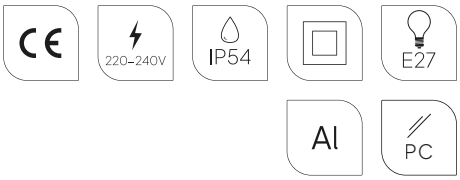





Product Eco-friendly.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

**Accessories:**

**Art. 152**
Corner bracket



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 350BL | E27 |
| 350WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 351BL | E27 |
| 351WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 380BL | E27 |
| 380WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 381BL | E27 |
| 381WH | |

# Modena & Modena Big





**Colour:**

- Black
- White

CE · 220–240V · IP54 · E27 · Al · PC

Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

IP54 · E27 · Al · PC




| Art | Type of light source |
|---|---|
| 351A/BL | E27 |
| 351A/WH | |

IP54 · E27 · Al · PC




| Art | Type of light source |
|---|---|
| 381A/BL | E27 |
| 381A/WH | |



# Modena & Modena Big





**Colour:**

- Black
- White

CE · 220–240V · IP54 · E27 · Al · PC


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Concreting anchor.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 304BL | E27 |
| 304WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 300BL | E27 |
| 300WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 384BL | E27 |
| 384WH | |





# Modena





**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.




**Art. 108**
Anchoring support.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 302 BL | E27 |
| 302WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 303BL | E27 |
| 303WH | |

# Modena Big





**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**


**Art. 305**
Concreting anchor.




**Art. 306**
Ground anchor.




**Art. 108**
Anchoring support.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 301BL | E27 |
| 301WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 382BL | E27 |
| 382WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 397BL | E27 |
| 397WH | |

# Venice






**Colour:**


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.







| Art | Type of light source |
|---|---|
| 261BL | E27 |
| 261WH | |



# Rimini





**Colour:**

- Black
- White

CE | 220-240V | IP54 | E27 | Al | PC


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 307**
Concreting anchor.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 250BL | E27 |
| 250WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 404BL | E27 |
| 404WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 259BL | E27 |
| 259WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 2591BL | E27 |
| 2591WH | |

# Rimini





220–240V IP54 E27 Al PC

**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

**Accessories:**

**Art. 150**
Corner bracket





# Rimini & Milano







**Colour:**

- Black
- White


Product Eco-friendly.

Luminaire suitable for extreme conditions.


Fully replaceable electrical kit.

**Accessories:**

**Art. 405**
Concreting anchor.




**Art. 406**
Ground anchor.



IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 401BL | E27 |
| 401WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 402BL | E27 |
| 402WH | |

IP54 E27 Al PC




| Art | Type of light source |
|---|---|
| 403BL | E27 |
| 403WH | |

# Power Distributor





**Colour:**

- Black
- White
- Graphite
- Aluminium


Product Eco-friendly.

Luminaire suitable for extreme conditions.

Fixture with energy distributor option.

**Accessories:**

**Art. 2934**
Concreting anchor



IP54 Al




| Art | Socket |
|---|---|
| 2900AL | E (Uni) |
| 2900BL | |
| 2900GR | |
| 2900WH | |
| 2902AL | F(SCHUKO) |
| 2902BL | |
| 2902GR | |
| 2902WH | |

IP54 Al





| Art | Socket |
|---|---|
| 2901AL | E (Uni) |
| 2901BL | |
| 2901GR | |
| 2901WH | |
| 2903AL | F(SCHUKO) |
| 2903BL | |
| 2903GR | |
| 2903WH | |

Poles

# Poles





**Art. 1277**




**Colour:**

AL BL GR


**Art. 1275**




**Colour:**

AL BL GR


**Art. 1273**




**Colour:**

AL BL GR


**Art. 3009**




**Colour:**

Galvanized

**Art. 3011**





**Colour:**


BL WH

**Accessories:**

**Art. 405**
Concreting anchor.





**Art. 406**
Ground anchor.



Poles


# Poles

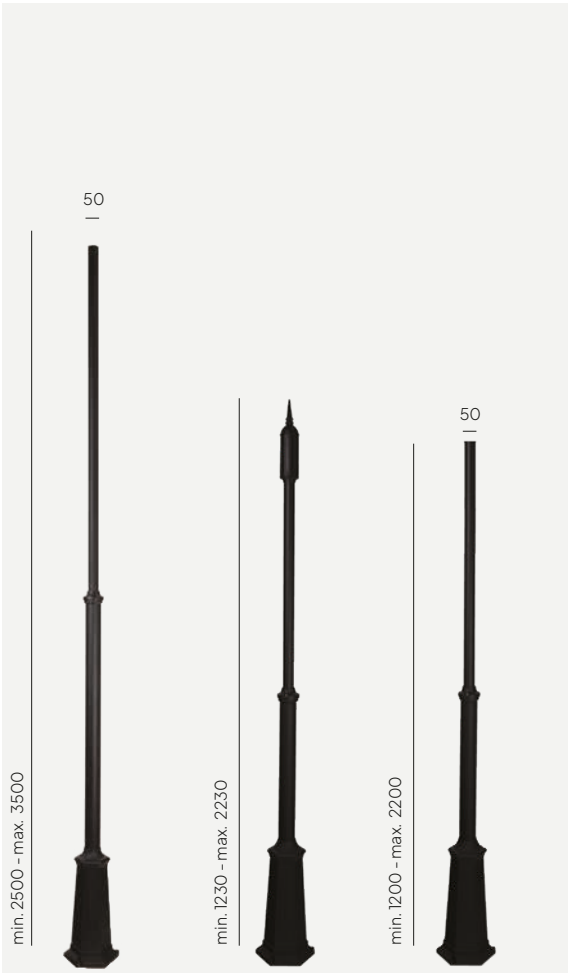


**Art. 3004 Art. 3005**


Art. 3005 includes concreting anchor 7663.




**Colour:**

AL BL GR


**Art. 2000**




**Colour:**

AL BL GR


**Art. 1255**




**Colour:**

AL BL GR


**Art. 1257**




**Colour:**

AL BL GR

**Art. 30101**





**Colour:**

BL WH

**Art. 3013**


Art. 3013 includes terminal.




**Colour:**

BL WH

**Art. 3010**





**Colour:**

BL WH

## Accessories:


**Art. 7661**

Electric box





**Art. 7662**

Pole connector.





**Art. 7663**

Concreting anchor





**Art. 144**

Pole conector





**Art. 305**

Concreting anchor





**Art. 306**

Ground anchor



# Special Icons




Natural Scandinavian wood.

We use only high-quality, natural Scandinavian wood, which adds warmth and elegance to the lamps. The natural Scandinavian wood used in the fittings refers to the Nordic style, its naturalness, lightness and subtlety.



Luminaires with energy distributor option adjustment.

Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.




Fully replaceable electrical kit.

If required, our lamps allow for easy replacement of electrical components, ensuring a longer product life.



Handmade product (artisanal method).

Each lamp is meticulously handcrafted using traditional craftsmanship methods to guarantee its unique character. The power of craftsmanship.



Multiple light variants adjustment.

We offer a variety of lighting modes, from soft light to strong illumination, adapting to different lighting needs.



Vandal-resistant luminaire.

Our lamps are robustly manufactured and vandal-resistant, making them an ideal choice for public areas.




Product Eco-friendly.

We care about the environment. Our products are environmentally friendly and manufactured with minimal environmental impact in mind.




Luminaire suitable for extreme conditions.

The lampconstruction is resistant to extreme weather conditions, from frost to heat, guaranteeing its durability.



Wide range of light direction.

Our lamps are equipped with an adjustable head, allowing the direction of light to be set precisely according to individual needs.



Double corrosion protection (galvanising+powder coating).

Each lamp is protected against corrosion twice, first by galvanising and then by powder coating. This guarantees its longevity and resistance to weathering.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Our garden lights offer advanced energy control features that allow significant savings. Features such as light dimming, motion sensor and twilight sensor ensure that the light shines only when it is needed

# Icons

## Product Characteristics




Luminaire with socket for replaceable light source (GU10, E27, E14)




Luminaire with socket for interchangeable light sources.

---




LED luminaire

Luminaire equipped with LED module




Voltage 220–240V

## Control



Motion sensor

Luminaire equipped with a motion sensor.

---




DIM dimmable version

Phase dimmable luminaire

---




DALI light control

---




Light control in the D4i system

## Security




CE Certificate

CE - Manufacturers declaration that a labelled product complies with the requirements of the EU'p.so-called ‚New Approach' directive

---

Protection class (I, II, III)



Protection class I/ Luminaire with protective conductors.




Protection class II/protection by double or reinforced insulation.




Protection class III/low voltage protection.


---




IP

IP rating, determines whether the electrical equipment is suitable for various environmental conditions

---




IK

The IK shock resistance level is a measure of the resistance of electrical equipment enclosures to mechanical stress, particularly impact stress


## Connection / application



Specified inrun strength (for recessed luminaires)


Overrun luminaire (for vehicles with pneumatic tyres)

---



Length of cable with plug or lngth of cable with open end.

---




Diameter of luminaire mounting on pole.


## Light emission



Light (up, down)

Determination of the direction of the light beam emission.

---



Light (narrow down - wide up, narrow up, etc. )

Determination of the direction and angle of the light beam emission.

---



Swivel and tilt range

Adjustable light direction.



Light angle

Determination of the angle of the light beam emission.

## Main and visual materials used




Steel

---




Stainless steel

---




Aluminium

---




Copper

---



Wood

## Type of lens




Toughened / safe glass

Luminaire with safe glass diffuser.




PMMA (acrylic glass)

The luminaire uses PMMA (acrylic glass) diffuser.




PC (polycarbonate)

The luminaire uses PC (polycarbonate) diffuser.

NORLYS

Norlys AS
P.B 1014 Hoff, 0218 Oslo
Hovfaret 4B, 0275 Oslo
Norway

+47 24 12 40 10
www.norlys.com
firmapost@norlys.no