







**NORLYS is a Scandinavian company** with a 50 years history in the professional lighting business. We offer one of the largest product ranges in decorative outdoor lighting and we deliver highest quality all over the world.

**No secret:** our quality comes from the choice of excellent raw-material in combination with a perfectly controlled production process. All our products are made in Europe in our own ISO 9001 certified factory. On a surface of more than 15000m<sup>2</sup> we use most modern machines and equipment. Steady investment keeps us on the top of the industrial process. A good example is our foundry, one of the most modern installations in Europe.

**When we cannot do it alone,** we carefully choose our partners. This is especially important in the field of LED technology. We use the best LED quality from the very best suppliers. No compromise allowed!

**Good design, large choice, excellent quality:** indeed that's what our customers appreciate! In this world of quick exchange it is equally important to work on high delivery-speed. This is why we have several very large warehouses with thousands of finished products ready to be shipped. If something is not already in stock, we produce within days.













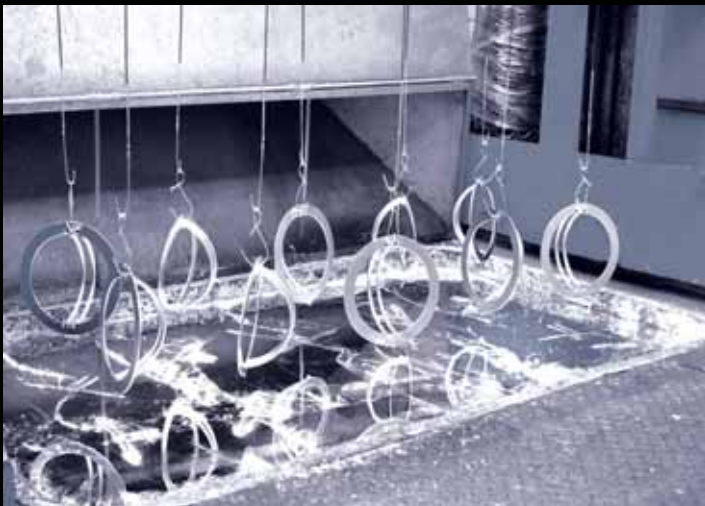
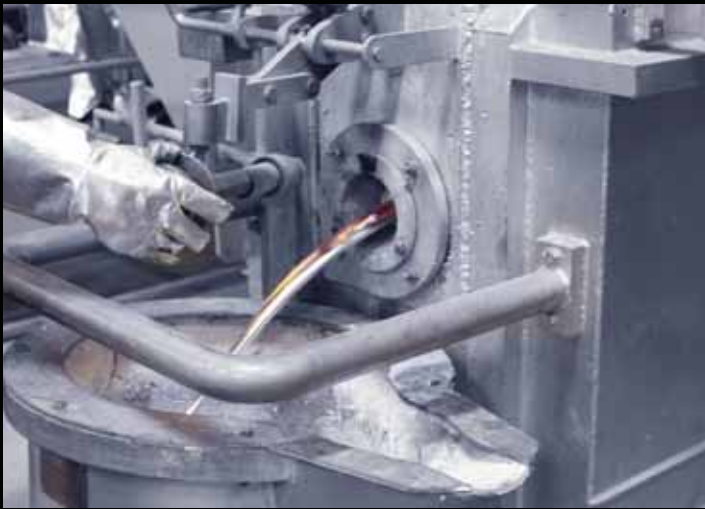


No pictures contained in this catalogue can be reproduced, even partially. The Company reserves the right to change technical and aesthetic characteristics of illustrated products at any times, in order to increase constantly their quality and performance without written notice.

# LIGHT SOURCE / SOCKET

## LIGHT SOURCE

## SOCKET



NORLYS offers a large variety of lamp options. Please refer to the concerned product page for details. The large majority of our products is delivered without lamp.

Many fixtures are equipped with E27 lampholder. Please see below for equivalents between GLS and halogen lamps to be used. For example if a 60W incandescent lamp is recommended, you can use halogen lamps up to 46W. Alternatively you might use fluo compact lamps with integrated ballast or LED retrofit lamps for E27 lampholder. Do not hesitate to contact us for advise.

HALOGEN		GLS
30W	<=>	40W
46W	<=>	60W
57W	<=>	75W
77W	<=>	100W

In some exceptional cases our products are delivered with LED bulb(s). Originally this has been done to make sure that the right lamp is being used in the concerned fixture. In other cases it simply makes installation easier (see RENA inground fixtures).

Finally, you will as well find a large number of products with LED module. LED modules allow better cooling and optimized control of the light output. Certain fixtures use more than one module and in the case of VISBY for example, each module can be driven separately. As a result you have a fixture allowing many different applications (twilight detector, movement detector, different light output in function to your needs). LED modules are a good solution to save energy and to decrease maintenance cost over the time.

### Design and technical details:

The characteristics of the models mentioned in this catalogue are not binding. Norlys reserves itself the right to change them without notice and without obligation of communication in according to its own technical constructive requirements and/or to improve the products.

## Color temperatures (Kelvin)



Look for LED products: See the green house





# COLOR

## COLOR CHART

Important: Each product number in the catalogue are specified with a standard color.  
Other colors by request. Printed color images may differ from the real product.



ALUMINIUM, RAL 9006



GRAPHITE, RAL 7016




WHITE, RAL 9003



GALVANIZED STEEL



COPPER



BLACK, RAL 9005



STAINLESS STEEL



BLACK/GREEN



BLACK/COPPER



BLACK/GOLD

# INDEX



ALTA  
p. 70, 71




ARVIKA  
p. 25




ASKER FAMILY  
p. 40, 41



BASEL  
p. 54, 55



BERGEN FAMILY  
p. 92, 93



BERLIN  
p. 82, 83



BERN  
p. 52, 53



BODEN  
p. 56, 57



BOLOGNA FAMILY  
p. 116, 117



BORNHOLM  
p. 50



BREMEN  
p. 80, 81



CHELSEA FAMILY  
p. 94 - 97




COMO FAMILY  
p. 118



EGERSUND FAMILY  
p. 22, 23



FIRENZE  
p. 119



GENEVE  
p. 42, 43



GENOVA  
p. 98, 99



GENOVA MINI  
p. 98



GLASGOW  
p. 100, 101



GRIMSTAD  
p. 36, 37



HALDEN  
p. 48, 49



HALMSTAD FAMILY  
p. 68, 69



HAMBURG  
p. 82



HELSINKI FAMILY  
p. 32, 33



KARLSTAD  
p. 90, 91



KIRUNA  
p. 32



KOSTER FAMILY  
p. 16 - 19



LATINA  
p. 101



LILLEHAMMER  
p. 30, 31



LOFOTEN FAMILY  
p. 102, 103

# INDEX



LONDON FAMILY  
p. 104 - 109



LUND FAMILY  
p. 84, 85



MODENA FAMILY  
p. 110 - 115



MOLDE  
p. 64, 65



NAMSOS FAMILY  
p. 34, 35



NARVIK  
p. 24



NICE  
p. 12, 13



NORDKAPP  
p. 60, 61



NORDLAND  
p. 58, 59



OSLO FAMILY  
p. 86, 87



OPPLAND  
p. 62, 63



PARIS  
p. 88, 89



RENA  
p. 38, 39



RIMINI/MILANO FAMILY  
p. 120, 121



ROMA  
p. 101



RONDANE  
p. 50, 51



SANDE FAMILY  
p. 26, 27



SANDVIK FAMILY  
p. 44, 45



SCANDINAVIAN WOOD  
p. 66, 67



STAVANGER  
p. 20, 21



STOCKHOLM FAMILY  
p. 72 - 79



SUNNFJORD  
p. 8, 9



VANSBRO  
p. 93



VASA  
p. 46, 47



VENEDIG  
p. 98



VISBY  
p. 10, 11



VOSS  
p. 28, 29



TELESCOPIC POLES  
p. 14, 15





ACCESSORIES  
p. 122, 123



# SUNNFJORD



LED



## SUNNFJORD

IP55, class I


Ideally suited for use in communal areas such as car parks and walkways, Sunnfjord is a powder coated aluminium head.

For use on poles with 76mm external diameter at top.


Supplied with frosted lens

See also poles for use with Sunnfjord on p. 14

### Art. 1507

46,7W LED   
Aluminium, 1507AL  
Graphite, 1507GR  
LED module: 6000 lm,  
4000K, 60 000h, EE: A++

### Art. 1508

31,5W LED   
Aluminium, 1508AL  
Graphite, 1508GR  
LED module: 4342 lm,  
4000K, 60 000h, EE: A++

### Accessories

**Art. 1509**  
Adapter for 76/60mm  
Aluminium, 1509AL  
Graphite, 1509GR

Suitable to use with poles  $\varnothing$  60mm









# VISBY




Version LED



**VISBY**  
 IP65, class I  
 Ideally suited for use in communal areas such as car parks and walkways, Visby is a powder coated aluminium head fitted with a UV resistant polycarbonate lens.

For use on poles with 60mm external diameter at top.


**Art. 575**  
 70W HIT-CE, G12  
 Aluminium, 575AL  
 Graphite, 575GR  
 EEI: A+

**Art. 576**   
 49,2W LED  
 Aluminium, 576AL  
 Graphite, 576GR

LED module (up)  
 30,4W, 3000 lm, 3000K  
 50 000h, EEI: A+

LED module (down)  
 18,8W, 2000 lm, 3000K  
 50 000h, EEI: A+

\* Visby with 4000K available by request, contact your supplier

**Art. 577**   
 30,4W LED  
 Aluminium, 577AL  
 Graphite, 577GR



LED module (up)  
 30,4W, 3000 lm, 3000K  
 50 000h, EEI: A+

**Accessories**  
**Art. 154**  
 Aluminium, 154AL  
 Graphite, 154GR

Arm for use on wall with Visby, ø60mm.

See also poles for use with Visby on p. 14


# NICE

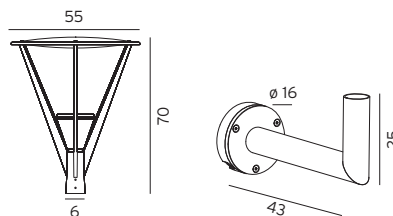

**NICE**  
IP65, class I  
Ideally suited for use in communal areas such as carparks and walkways. Powder coated aluminium head.

For use on poles with 60mm external diameter at top.

**Art. 770**  
70W HIT-CE, G12  
Aluminium, 770AL  
Graphite, 770GR  
EEI: A+

**Art. 777**   
40,8W LED  
Aluminium, 777AL  
Graphite, 777GR  
LED module: 5127 lm,  
3000K, 50 000h, EEI: A++

**Accessories**  
**Art. 154**  
Aluminium, 154AL  
Graphite, 154GR

Arm for use on wall with NICE,  $\varnothing$ 60mm.






See also poles for use with NICE on p. 14

\* Nice with 4000K available by request, contact you supplier.





# TELESCOPIC POLE

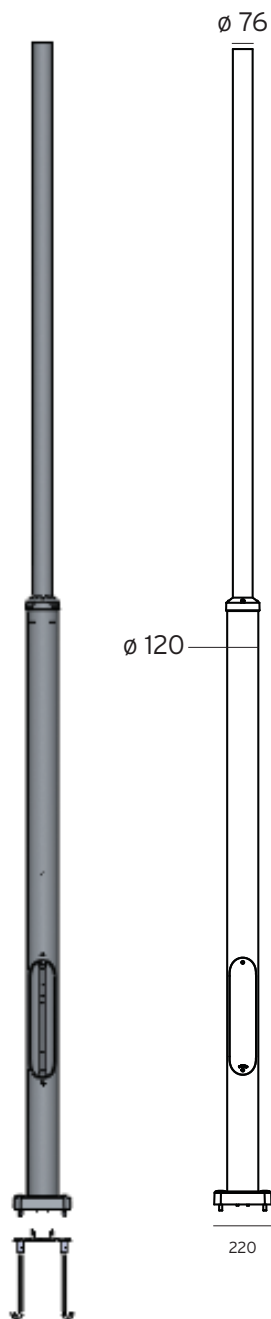

**POLE**  
For use with products VISBY, SUNNFJORD, NICE and KOSTER.  
Ideally suited for use in communal areas such as car parks and walkways.  
  
The pole is telescopic and can be adjusted from: Minimum 3625mm to maximum 4490mm. Top tube  $\varnothing$  76mm.

- Art. 3005**  
Included service door + anchors
- Art. 3006**  
Included service door + anchors + art 7661
- Art. 3007**  
Included service door + anchors + Art 7662, EK 480

**Accessories Art. 7660**  
Adapter for 76/60mm (short version)  
  
\* Must be used with **VISBY and KOSTER Art. 727, 729, 1913** head  $\varnothing$  60mm

**Accessories Art. 7665**  
Adapter for 76/60mm (long version)  
  
\* Must be used with **NICE** head  $\varnothing$  60mm


**Accessories Art. 7661**  
Electric box for pole 3006  
  
**Art. 7662**  
Electric box for pole 3007 (EK 480 G1S-2D)



# KOSTER



KOSTER FAMILY →




## KOSTER LAMP HEAD


IP54, Class I  
Ideally suited for use in communal areas such as car parks and walkways, Koster is a powder coated aluminium head supplied with optical structure polycarbonate lens.

**Art. 1913: For use on poles with 60mm external diameter at top.**

See also poles for use with Koster on p. 14

**Art. 1913**   
18,8W LED  
Aluminium, 1913AL  
Graphite, 1913GR  
White, 1913W  
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

\* Koster with 4000K available by request, contact your supplier.



## KOSTER TELESCOPIC POLE

IP54, class I  
Ideally suited for use in communal areas such as car parks and walkways, Powder coated aluminium. Optical structure polycarbonate lens. Pole and head included.

### Accessories for 1914

**Art. 405**  
Concreting anchor

**Art. 406**  
Anchoring support

**Art. 1914**   
18,8W LED  
Aluminium, 1914AL  
Graphite, 1914GR  
White, 1914W  
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

\* Koster with 4000K available by request, contact your supplier.











# KOSTER



**KOSTER**  
Powder coated aluminium wall light supplied with optical structure polycarbonate lens. IP54

**Accessories**  
**Art. 158**  
Corner bracket for Koster wall models. Aluminium, 158AL Graphite, 158GR White, 158W

**Art. 720**  
77W Halo. max class II  
Aluminium, 720AL Graphite, 720GR White, 720W  
EEI: A+..D

**Art. 1911**   
18,8W LED class I  
Aluminium, 1911AL Graphite, 1911GR White, 1911W  
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

**Art. 724**  
77W Halo. max class I  
Aluminium, 724AL Graphite, 724GR White, 724W  
EEI: A+..D

**Art. 725**   
11,3W LED class I  
Aluminium, 725AL Graphite, 725GR White, 725W  
LED module: 1100 lumen, 3000K, 50000h, EEI: A+

**Art. 1912**   
18,8W LED class I  
Aluminium, 1912AL Graphite, 1912GR White, 1912W  
LED module: 2000 lumen, 3000K, 50000h, EEI: A+

\* Koster LED 2000 lumen with 4000K available by request, contact you supplier.




# STAVANGER



LED



Frosted lens



## STAVANGER

IP65, class I

Powder coated aluminium bollard. Lens: UV stabilised polycarbonate, vandal resistant. Indirect LED light output.

Art. 1240, 1244 og 1247 delivered with clear lens

Art. 1243, 1246 og 1248 delivered with frosted lens


### Accessories for Stavanger bollards

#### Art. 1230

Concreting anchor for Stavanger range.

#### Art. 1231

Anchoring support for Stavanger range.



## Art. 1240

14,7W LED



### Clear lens

Aluminium, 1240AL  
Graphite, 1240GR  
LED module: 1380 lumen,  
3000K, 50000h, EEI: A+


## Art. 1244

14,7W LED



### Clear lens

Aluminium, 1244AL  
Graphite, 1244GR  
LED module: 1380 lumen,  
3000K, 50000h, EEI: A+



## Art. 1247

7W LED



### Clear lens

Aluminium, 1247AL  
Graphite, 1247GR  
LED module: 750 lumen,  
3000K, 50000h, EEI: A+

\* Stavanger with LED, 4000K available by request, contact your supplier.

## Art. 1243 New!

E27, 46W Halo. max.

### Frosted lens

Aluminium, 1243AL  
Graphite, 1243GR  
EEI: A+.D

## Art. 1246 New!

E27, 46W Halo. max.

### Frosted lens

Aluminium, 1246AL  
Graphite, 1246GR  
EEI: A+.D

## Art. 1248 New!

E27, 46W Halo. max.

### Frosted lens

Aluminium, 1248AL  
Graphite, 1248GR  
EEI: A+.D





# EGERSUND MINI

NEW







LED



# EGERSUND



LED



## EGERSUND

IP65, class I  
Powder coated aluminium bollard. Clear PMMA lens.

Indirect LED light output.

### Egersund Art. 1280

20,3W LED  
Aluminium, 1280AL  
Graphite, 1280GR  
LED module: 2240 lm,  
3000K, 50000h, EEI: A+



### Egersund Art. 1285

20,3W LED  
Aluminium, 1285AL  
Graphite, 1285GR  
LED module: 2240 lm,  
3000K, 50000h, EEI: A+



## EGERSUND MINI

IP65, class I  
Powder coated aluminium bollard. Clear PMMA lens  
Indirect LED light output.

**New!**

### Egersund Mini Art. 1290

13,2W LED  
Aluminium, 1290AL  
Graphite, 1290GR  
LED module: 1360 lm,  
3000K, 50000h, EEI: A+,  
dimmable (Triac)



### Egersund Mini Art. 1291

13,2W LED  
Aluminium, 1291AL  
Graphite, 1291GR  
LED module: 1360 lm,  
3000K, 50000h, EEI: A+,  
dimmable (Triac)



### Accessories for Art. 1280, 1285

#### Art. 1230

Concreting anchor

#### Art. 1231

Anchoring support

### Accessories for Art. 1290, 1291

#### Art. 205


Concreting anchor

#### Art. 206

Anchoring support

\* Egersund with 4000K available by request, contact you supplier.




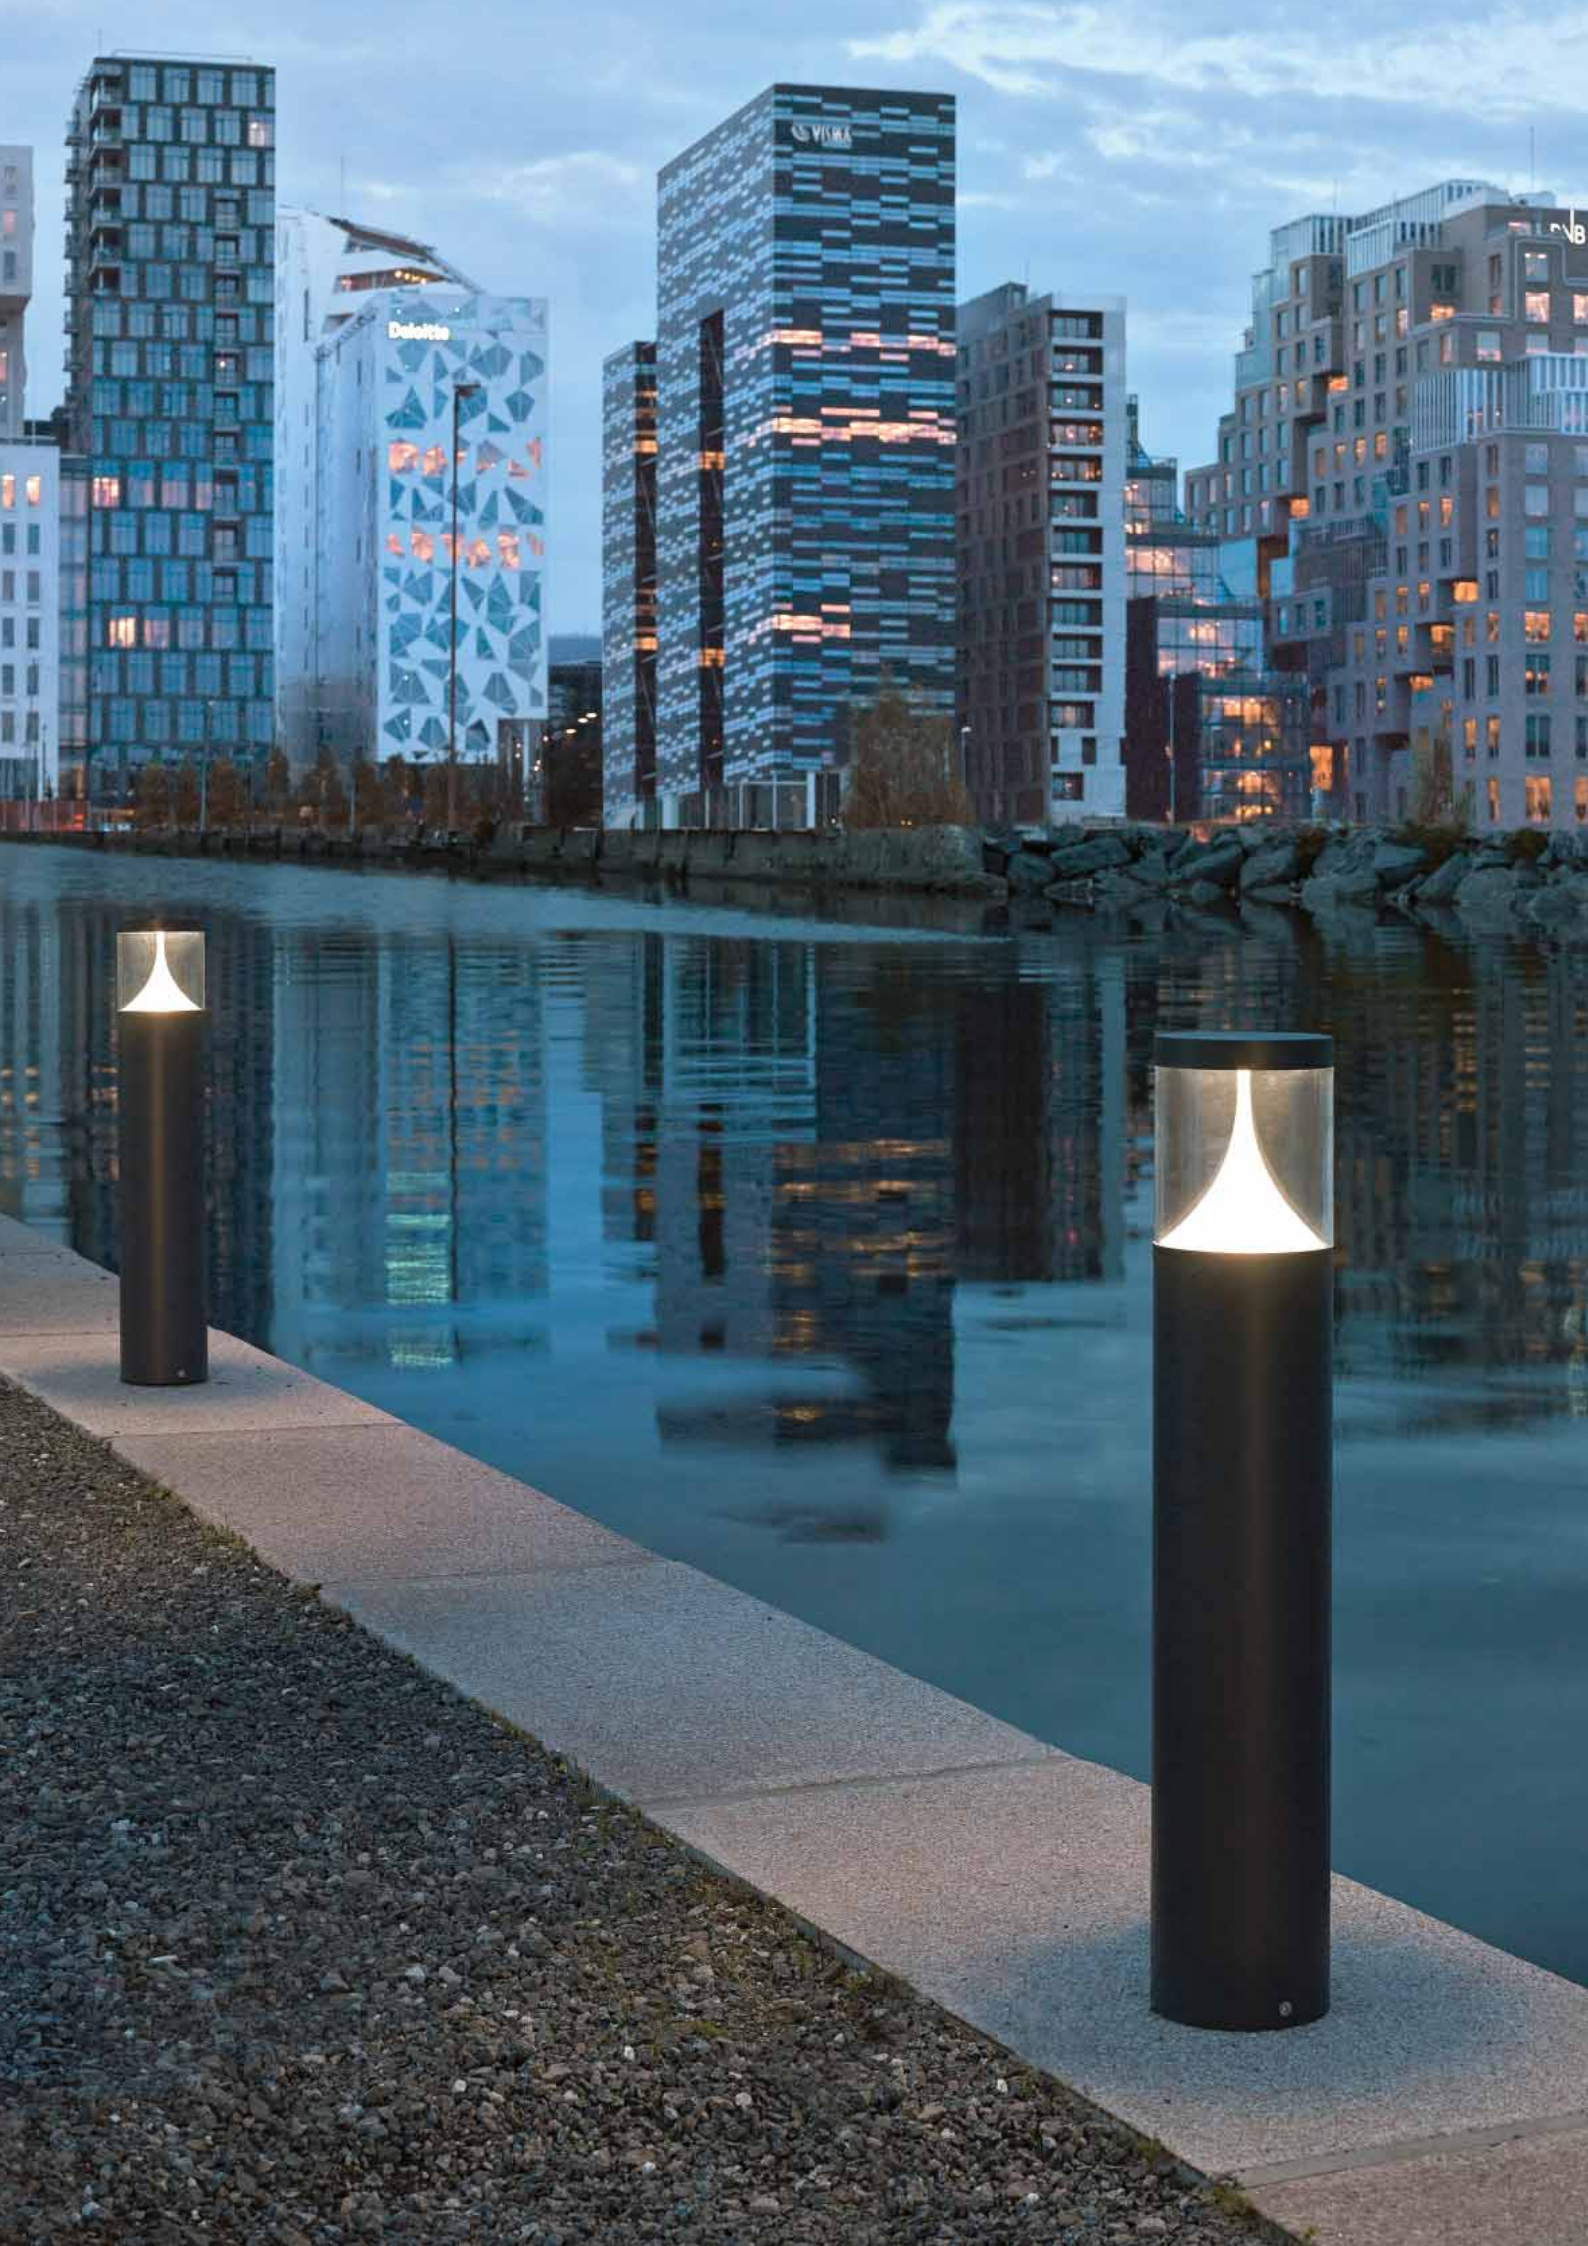





## NARVIK



### NARVIK


IP65, class I  
Heavy duty bollard.  
Powder coated aluminium  
bollard. Glare free with  
indirect light effect on  
internal conical tube. Lens  
stabilised polycarbonate,  
vandal resistant.

Concreting anchor:  
included.

### Art. 552

35W HIT-CE, G12  
Aluminium, 552AL  
Graphite, 552GR  
White, 552W  
EEI: A++

### Art. 557

24,9W LED   
Aluminium, 557AL  
Graphite, 557GR  
White, 557W  
LED module: 3100 lm,  
3000K, 50000h, EEI: A++

\* Narvik with 4000K  
available by request,  
contact your supplier.



## ARVIKA



G12 GX24q-2



### ARVIKA IP44, class I

Arvika can be delivered with normal jack contacts automatic fuses and earth fault. See Art 894 or 895

**Accessories**  
Supplied with concrete anchor kit as standard.

**Art. 890**  
35W, G12  
Galvanized steel, 890GA  
Black, 890B  
EEI: A+

**Art. 892**  
18W, Gx24 q-2  
(OSRAM DULUX T/E included)  
Galvanized steel, 892GA  
Black, 892B  
EEI: B


**Art. 894** (normal jack contacts)  
35W, G12  
Galvanized steel, 894GA  
Black, 894B  
EEI: A+


**Art. 895** (normal jack contacts)  
18W, Gx24 q-2  
(OSRAM DULUX T/E included)  
Galvanized steel, 895GA  
Black, 895B  
EEI: B

\* Option with LED will be ready during summer 2017  
Check web for updates of new Art.nr or contact your supplier.



# SANDE

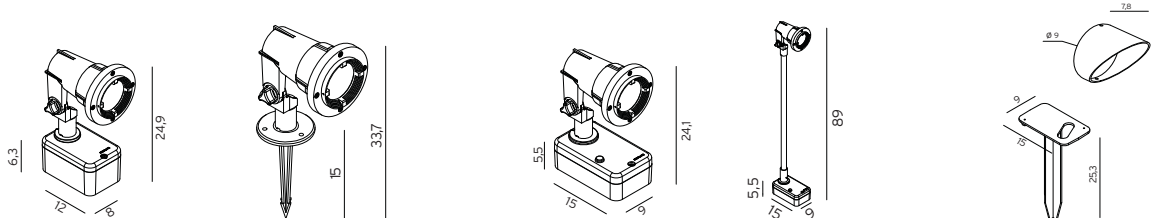

**SANDE series**   
IP65, class I

Landscape and shop lighting fixture in aluminium. Adjustable head for tilting.

**Important**  
During 2017: 4W, GU10, 272lm, 3000K will be replaced by 5,4W, GU10 402 lm

**Art. 1590**  
(Wall, short arm)  
4W, LED, GU10, 40D  
Graphite, 1590GR  
Black, 1590B  
4W LED GU10 included, 272 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1591**  
(Wall, short arm)  
7W, LED  
Graphite, 1591GR  
Black, 1591B  
LED module: 750 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1592**  
(5m cable and plug incl. spike)  
4W, LED, GU 10  
Graphite, 1592GR  
Black, 1592B  
4W LED GU10 included, 272 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1593**  
(5m cable and plug incl. spike)  
7W, LED  
Graphite, 1593GR  
Black, 1593B  
LED module: 750 lm, 3000K, 50000h, 40D, EEL: A+  
**(For use as wall application remove spike)**

**Art. 1594**  
(Ground, short arm)  
7W, LED  
Graphite, 1594GR  
Black, 1594B  
LED module: 750 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1598**  
4W, LED, GU10, 40D  
Graphite, 1598GR  
Black, 1598B  
4W LED GU10 included, 272 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1596**  
(Ground, long arm)  
7W, LED  
Graphite, 1596GR  
Black, 1596B  
LED module: 750 lm, 3000K, 50000h, 40D, EEL: A+

**Art. 1599**  
4W, LED, GU10, 40D  
Graphite, 1599GR  
Black, 1599B  
4W LED GU10 included, 272 lm, 3000K, 50000h, 40D, EEL: A+

**Accessories**  
**Art. 1233**  
Cap

**Accessories**  
**Art. 1234**  
Spike for:  
Art. 1594  
Art. 1596  
Art. 1598  
Art. 1599






4B




VOSS




**VOSS**  
IP 54, Class I


Die cast aluminium  
up and down wall light.




**ART. 783**  
70W HIT-CE, G12  
Aluminium, 783AL  
Graphite, 783GR




**ART. 780**  
70W HIT-CE, G12  
Aluminium, 780AL  
Graphite, 780GR



**ART. 784**  
70W HIT-CE, G12  
Aluminium, 784AL  
Graphite, 784GR



**ART. 785**  
70W HIT-CE, G12  
Aluminium, 785AL  
Graphite, 785GR

**ART. 1950**   
21,6W LED  
Aluminium, 1950AL  
Graphite, 1950GR  
LED module: 1830 lm,  
3000K, 50000h, EE: A+

**ART. 1951**   
14,9W LED  
Aluminium, 1951AL  
Graphite, 1951GR  
LED module: 1220 lm,  
3000K, 50000h, EE: A+












# LILLEHAMMER




LED



**Lillehammer**  
IP 65, Class I


Die cast aluminium.  
Clear glass.  
Art 1580, 1582 and  
1584 can be turned  
both ways.



**Art. 1580**   
2x3,7W LED  
Aluminium, 1580AL  
Graphite, 1580GR  
White, 1580W  
Black, 1580B  
LED module: 2x305 lumen,  
3000K, 50000h, EEL: A+



**Art. 1581**   
2x3,7W LED  
Aluminium, 1581AL  
Graphite, 1581GR  
White, 1581W  
Black, 1581B  
LED module: 2x305 lumen,  
3000K, 50000h, EEL: A+



**Art. 1582**   
3,7W LED  
Aluminium, 1582AL  
Graphite, 1582GR  
White, 1582W  
Black, 1582B  
LED module: 305 lumen,  
3000K, 50000h, EEL: A+



**Art. 1583**   
2x3,7W LED  
Aluminium, 1583AL  
Graphite, 1583GR  
White, 1583W  
Black, 1583B  
LED module: 2x305 lumen,  
3000K, 50000h, EEL: A+






**Art. 1584**   
3,7W LED  
Aluminium, 1584AL  
Graphite, 1584GR  
White, 1584W  
Black, 1584B  
LED module: 305 lumen,  
3000K, 50000h, EEL: A+

\* Lillehammer with 4000K available by request, contact you supplier.

# HELSINKI



# KIRUNA



**KIRUNA**  
IP 66, class II  
Heavy duty anti vandal  
fixture. Powder coated  
aluminium. Supplied with  
a 4mm anti vandal opal  
UV polycarbonate lens.

Art. 594 opal lens.

(Options also available  
with clear glass, contact  
your supplier.)

**Art. 594**  
26W, G24d-3  
Aluminium, 594AL  
Graphite, 594GR  
EEI: A+..B

**HELSINKI**  
IP 54  
Powder coated  
aluminium wall  
light. Available in  
a bent or straight  
arm option.

Supplied with  
clear poly-  
carbonate lens.

**Art. 882**  
77W Halo. max, E27  
class II  
Aluminium, 882AL  
Graphite, 882GR  
White, 882W  
EEI: A+..D

**Accessories**  
**Art. 156**  
Corner bracket for  
art 882.  
Aluminium, 156AL  
Graphite, 156GR  
White, 156W

**Art. 886**  
77W Halo. max, E27  
class I  
Aluminium, 886AL  
Graphite, 886GR  
White, 886W  
EEI: A+..D

**Accessories**  
**Art. 158**  
Corner bracket for  
art 886.  
Aluminium, 158AL  
Graphite, 158GR  
White, 158W





# NAMSOS



LED







# NAMSOS MINI

NEW



LED



**NAMSOS/NAMSOS MINI**  
IP 65, class I  
Recessed wall lighting and bollard.  
Wall fixture incl. recessing box.

**Namsos Art. 1930**   
13,2W LED  
Aluminium, 1930AL  
Graphite, 1930GR  
LED modul: 1376 lm, 3000K  
50000h, EE: A++

**Namsos Art. 1931**   
13,2W LED  
Aluminium, 1931AL  
Graphite, 1931GR  
LED modul: 1376 lm, 3000K  
50000h, EE: A++

**Namsos Art. 1932**   
13,2W LED  
Aluminium, 1932AL  
Graphite, 1932GR  
LED modul: 1376 lm, 3000K  
50000h, EE: A++

**Namsos Mini Art. 1340**   
4W LED  
Aluminium, 1340AL  
Graphite, 1340GR  
White, 1340W  
LED modul: 352 lm, 3000K  
50000h, dimmable (Triac), EE: A

\* Namsos wall and bollard with 4000K available by request, contact you supplier.

## Accessories for 1931 and 1932

**Art. 112**  
Concreting anchor for Art. 1931 and 1932

**Art. 113**  
Concreting anchor for Art. 1931 and 1932





**NEW!**







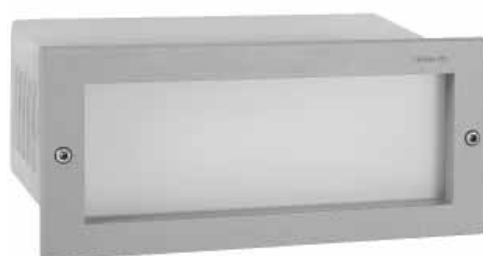

# GRIMSTAD



**GRIMSTAD**  
IP 65, class I  
Recessed wall lighting  
fixture incl. recessing  
box.

**Art. 1544**   
6W LED  
Open frame, white  
tempered safety glass.  
Aluminium, 1544AL  
Graphite, 1544GR  
LED Module: 628 lm, 3000K,  
50000h, EEI: A++

**Art. 1545**   
9,2W LED  
Louvered frame, white  
tempered safety glass.  
Aluminium, 1545AL  
Graphite, 1545GR  
LED Module: 981 lm, 3000K,  
60000h, EEI: A++

**Art. 1546**  
46W Halo. max, E14  
Aluminium, 1546AL  
Graphite, 1546GR  
EEI: A+..D

**Art. 1547**  
46W Halo. max, E14  
Aluminium, 1547AL  
Graphite, 1547GR  
EEI: A+..D










# RENA



GU10 GU10 LED




## RENA

IP 68, class I  
Cast aluminium inground  
lighting fixture.  
Tempered safety glass (max.  
2000Kg), stainless steel  
316L cover ring.

3m connecting cable  
included. (PG in stainless  
steel for cable 8-12mm)  
Polypropylene box for  
installation included.


### Art. 1550

Round model   
5,4W LED, GU 10  
Clear glass  
Stainless steel, 1550ST  
5,4W LED, GU10 included  
402 lm, 3000K, 50000h, 40D,  
EEI: A+

### Art. 1552

Round model  
6W max., GU 10  
Clear glass  
Stainless steel, 1552ST  
EEI: A+..D


### Art. 1554

Round model   
5,4W LED, GU 10  
Frosted glass  
Stainless steel, 1554ST  
5,4W LED, GU10 included  
402 lm, 3000K, 50000h, 40D,  
EEI: A+

### Art. 1556

Round model  
6W max., GU 10  
Frosted glass  
Stainless steel, 1556ST  
EEI: A+..D


### Art. 1551

Square model   
5,4W LED, GU 10  
Clear glass  
Stainless steel, 1551ST  
5,4W LED, GU10 included  
402 lm, 3000K, 50000h, 40D,  
EEI: A+

### Art. 1553

Square model  
6W max., GU 10  
Clear glass  
Stainless steel, 1553ST  
EEI: A+..D


### Art. 1555

Square model   
5,4W LED, GU 10  
Frosted glass  
Stainless steel, 1555ST  
5,4W LED, GU10 included  
402 lm, 3000K, 50000h, 40D,  
EEI: A+

### Art. 1557

Square model  
6W max., GU 10  
Frosted glass  
Stainless steel, 1557ST  
EEI: A+..D





**ASKER WALL**

IP 65, class I.  
Cast aluminium powder coated wall light.  
Supplied with structure polycarbonate lens

For best light distribution we recommend version with LED or 18W.



**Art. 1513**

E27, 46W Halo. max.  
Aluminium, 1513AL  
Graphite, 1513GR  
White, 1513W  
Black, 1513B  
EEI: A+..D



**Art. 1510**

8,6W LED  
Aluminium, 1510AL  
Graphite, 1510GR  
White, 1510W  
Black, 1510B  
LED Module: 800 lm,  
3000K, 50000h, EEI: A+



**Art. 1514**

E27, 46W Halo. max.  
Aluminium, 1514AL  
Graphite, 1514GR  
White, 1514W  
Black, 1514B  
EEI: A+..D



**Art. 1511**

8,6W LED  
Aluminium, 1511AL  
Graphite, 1511GR  
White, 1511W  
Black, 1511B  
LED Module: 800 lm,  
3000K, 50000h, EEI: A+

**Art. 1516**

18W, G24q-2, TC-DEL  
Aluminium, 1516AL  
Graphite, 1516GR  
White, 1516W  
Black, 1516B  
EEI: A+..B

**Art. 1517**


18W, G24q-2, TC-DEL  
Aluminium, 1517AL  
Graphite, 1517GR  
White, 1517W  
Black, 1517B  
EEI: A+..B

# ASKER



# ASKER BOLLARD

NEW



**ASKER WALL (Big)**  
IP65, klasse I

Cast aluminium powder coated wall light. Supplied with structure polycarbonate lens

\* Asker Big wall with 4000K available by request, contact you supplier.  
**NEW!**




**Art. 1300**  
9,3W LED  
Aluminium, 1300AL  
Graphite, 1300GR  
White, 1300W  
Black, 1300B  
LED Module: 2x628 lm, 3000K, 50000h, EEI: A++

**Art. 1303**  
E27, 46W Halo. max.  
Aluminium, 1303AL  
Graphite, 1303GR  
White, 1303W  
Black, 1303B  
EEI: A+..D



**Art. 1302**  
6W LED  
Aluminium, 1302AL  
Graphite, 1302GR  
White, 1302W  
Black, 1302B  
LED Module: 628 lm, 3000K, 50000h, EEI: A++

**Art. 1305**  
E27, 46W Halo. max.  
Aluminium, 1305AL  
Graphite, 1305GR  
White, 1305W  
Black, 1305B  
EEI: A+..D



**ASKER BOLLARD**  
IP65, klasse I

Powder coated aluminium bollard. Ideal for path-way-lighting where light pollution is an issue.  
**NEW!**


**Art. 1311**  
11,3W LED  
Aluminium, 1311AL  
Graphite, 1311GR  
Black, 1311B  
LED Module: 1100 lm, 3000K, 50000h, EEI: A+

**Accessories for 1311 and 1312**  
**Art. 1907**  
Concreting anchor

**Art. 1908**  
Anchoring support

**Art. 1312 (Dali)**  
11,6W LED  
Aluminium, 1312AL  
Graphite, 1312GR  
Black, 1312B  
LED Module: 1100 lm, 3000K, 50000h, EEI: A+  
Dali, dimmable, 1..100% dali interface  
**\*By request**


# GENEVE



**GENEVE**  
 IP 54, class I  
 Cast aluminium powder coated  
 up and down wall light, supplied  
 with opal polycarbonate lens.

\* For best light distribution we  
 recommend version with LED

**ART. 874**  
 E27, 46W Halo. max  
 Aluminium, 874AL  
 Graphite, 874GR  
 White, 874W  
 Black, 874B  
 EEI: A+..D

**Art. 879**   
 8,6W LED  
 Aluminium, 879AL  
 Graphite, 879GR  
 White, 879W  
 Black, 879B  
 LED Module: 800 lm,  
 3000K, 50000h, EEI: A+












# SANDVIK



**SANDVIK**  
class I  
Powder coated aluminium.  
Tempered glass.

Art. 791 and 792  
Up and down wall light  
IP 65

Art. 793 and 794  
Down wall light  
IP 65

Art. 795 and 796  
Down ceiling light.  
IP 54

**ART. 791**  
2x25W max, GU 10  
Aluminium, 791AL  
Graphite, 791GR  
White, 791W  
Black, 791B  
EEL: A+..D

**ART. 792**  
2x4W, LED, GU 10   
Aluminium, 792AL  
Graphite, 792GR  
White, 792W  
Black, 792B  
2x4W LED GU10 included, 2x250 lm,  
2700K, 50000h, 25D, EEL: A+

**ART. 793**  
25W max, GU 10  
Aluminium, 793AL  
Graphite, 793GR  
White, 793W  
Black, 793B  
EEL: A+..D


**ART. 794**  
4W, LED, GU 10   
Aluminium, 794AL  
Graphite, 794GR  
White, 794W  
Black, 794B  
4W LED GU10 included, 250 lm,  
2700K, 50000h, 25D, EEL: A+

**ART. 795**  
25W max, GU 10  
Aluminium, 795AL  
Graphite, 795GR  
White, 795W  
Black, 795B  
EEL: A+..D

**ART. 796**  
4W, LED, GU 10   
Aluminium, 796AL  
Graphite, 796GR  
White, 796W  
Black, 796B  
4W LED GU10 included, 250 lm,  
2700K, 50000h, 25D, EEL: A+



## VASA





### VASA IP65, class I

Powder coated cast aluminium up and down wall light. Supplied with optical structure polycarbonate lens to give even light distribution.

**Art. 120**  
E27, 57W Halo. max  
Aluminium, 120AL  
Graphite, 120GR  
White, 120W  
Black, 120B  
EEI: A+..D

**Art. 126**  
26W, G24q-3, TC-DEL  
Aluminium, 126AL  
Graphite, 126GR  
White, 126W  
Black, 126B  
EEI: A+..B

**Art. 127**   
E27, 8,5W  
Aluminium, 127AL  
Graphite, 127GR  
White, 127W  
Black, 127B  
8,5W LED E27 included, 806 lm,  
2700K, 25000h, dimmable, EEI: A+

**Art. 128**   
9,3W LED  
Aluminium, 128AL  
Graphite, 128GR  
White, 128W  
Black, 128B  
LED Module: 2x628 lm,  
3000K, 50000h, EEI: A++












# HALDEN





**HALDEN**  
IP65, class I  
Powder coated cast aluminium wall light. Supplied with optical structure polycarbonate lens to give even light distribution.

**Available on request:**  
Special finish in Black Copper.

**Art. 510**  
E27, 57W Halo. max  
Aluminium, 510AL  
Graphite, 510GR  
White, 510W  
Black, 510B  
EEI: A+..D

**Art. 516**  
18W, G24q-2, TC-DEL  
Aluminium, 516AL  
Graphite, 516GR  
White, 516W  
Black, 516B  
EEI: A+..B

**Art. 515**   
E27, 8,5W  
Aluminium, 515AL  
Graphite, 515GR  
White, 515W  
Black, 515B  
8,5W LED E27 included, 806 lm,  
2700K, 25000h, dimmable, EEI: A+

**Art. 517**   
9,1W LED  
Aluminium, 517AL  
Graphite, 517GR  
White, 517W  
Black, 517B  
LED Module: 1027 lm,  
3000K, 50000h, EEI: A++



\* Halden with 4000K available  
by request, contact you supplier.



# RONDANE



# BORNHOLM



**RONDANE**  
IP65, class I


Powder coated aluminium wall light supplied with polycarbonate lens. Rondane is suitable for wall and ceiling mounting.

**RONDANE**  
**Art. 531**  
18W, G24q-2, TC-DEL  
Aluminium, 531AL  
Graphite, 531GR  
White, 531W  
EE: A+..B

**Art. 537**   
11,3W LED  
Aluminium, 537AL  
Graphite, 537GR  
White, 537W  
LED Module: 1100 lm,  
3000K, 50000h, EE: A+

**RONDANE**  
**Art. 538**  
9W max, E27, LED  
Aluminium, 538AL  
Graphite, 538GR  
White, 538W  
EE: A+..D  
**Only for use with LED retrofit lamps. Not included.**


**BORNHOLM**  
IP65, class I  
Powder coated aluminium wall light supplied with polycarbonate lens. Bornholm is suitable for wall and ceiling mounting.

**BORNHOLM**   
**Art. 541**  
11,3W LED  
Aluminium, 541AL  
Graphite, 541GR  
White, 541W  
LED Module: 1100 lm,  
3000K, 50000h, EE: A+





## BERN





### BERN IP54, class I

Wallplate in aluminium. Front in Galvanized steel, stainless steel, powder coated black steel or copper. Massive copper reveals a nice and natural patina with age. Heavy clear or frosted glass. We use stainless steel 316L. An oil application from time to time insures long time beauty of the fixture.

**Art. 650**  
E27, 46W Halo. max  
clear glass  
Stainless steel, 650ST  
Galvanized, 650GA  
Black, 650B  
EEI: A+..D

**Art. 651**  
E27, 46W Halo. max  
frosted glass  
Stainless steel, 651ST  
Galvanized, 651GA  
Black, 651B  
Copper, 651CO  
EEI: A+..D

**Art. 655**   
6W LED  
frosted glass  
Stainless steel, 655ST  
Galvanized, 655GA  
Black, 655B  
LED Module: 628 lm, 3000K  
50000h, EEI: A++


**Art. 656**   
13W LED  
frosted glass  
Stainless steel, 656ST  
Galvanized, 656GA  
Black, 656B  
LED Module: 1010 lm, 3000K







# BASEL



**BASEL**  
IP54, class I

Wallplate in aluminium. Front in galvanized steel, stainless steel, powder coated black steel or copper.

Massive copper reveals a nice and natural patina with age. Heavy clear or frosted glass. We use stainless steel 316L. An oil application from time to time insures long time beauty of the fixture.

\*Also available (on request) models with motion detectors.

**Art. 660**  
E27, 57W Halo. max clear glass  
Stainless steel, 660ST  
Galvanized, 660GA  
Black, 660B  
EEI: A+.D



**Art. 661 \***  
E27, 57W Halo. max frosted glass  
Stainless steel, 661ST  
Galvanized, 661GA  
Black, 661B  
Copper, 661CO  
EEI: A+.D

**Art. 668**   
6W LED  
frosted glass  
Stainless steel, 668ST  
Galvanized, 668GA  
Black, 668B  
LED Module: 628 lm, 3000K  
50000h, EEI: A++

**Art. 669**   
13W LED  
frosted glass  
Stainless steel, 669ST  
Galvanized, 669GA  
Black, 669B  
LED Module: 1010 lm, 3000K  
39000h, EEI: A



# BODEN

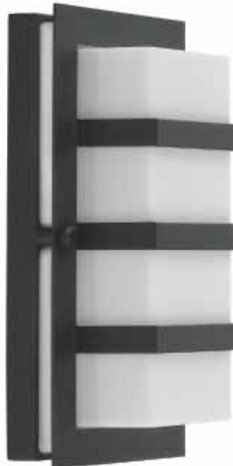


**BODEN**  
IP54, class I.  
Art. 860, 866:  
Opal polycarbonate

Art. 862: Clear  
polycarbonate

**Art.860**  
E27, 46W Halo. max  
Galvanized steel, 860GA  
Black, 860B  
EEI: A+..D

**Art.862**  
E27, 46W Halo. max  
Galvanized steel, 862GA  
Black, 862B  
EEI: A+..D

**Art. 866**   
8,6W LED  
Galvanized, 866GA  
Black, 866B  
LED Module: 800lm, 3000K,  
50000h, EEI: A+












# NORDLAND



G24q-1 G24q-3 LED



**NORDLAND**  
IP65, class I  
Powder coated aluminium  
wall light supplied with  
opal polycarbonate lens.


Nordland is suitable  
for wall and ceiling  
mounting.


**Art. 713**  
2x13W, G24q-1, TC-DEL  
Aluminium, 713AL  
Graphite, 713GR  
White, 713W  
EEI: A+..B

**Art. 714**  
26W, G24q-3, TC-DEL  
Aluminium, 714AL  
Graphite, 714GR  
White, 714W  
EEI: A+..B

**Art. 715**  
2x26W, G24q-3, TC-DEL  
Aluminium, 715AL  
Graphite, 715GR  
White, 715W  
EEI: A+..B

**Art. 71200**  
2x max 9W, E27, LED  
Aluminium, 71200AL  
Graphite, 71200GR  
White, 71200W  
EEI: A+..D  
**Only for use with  
LED retrofit lamps.  
Not included.**

**Art. 718**   
11,3W LED  
Aluminium, 718AL  
Graphite, 718GR  
White, 718W  
LED Module: 1100 lm,  
3000K, 50000h, EEI: A+

**Art. 719**   
12,9W LED  
Aluminium, 719AL  
Graphite, 719GR  
White, 719W  
LED Module: 1500lm,  
3000K, 50000h, EEI: A+


**Art. 5040**   
13,6W LED  
Aluminium, 5040AL  
Graphite, 5040GR  
White, 5040W  
LED Module: 1500lm,  
3000K, 50000h, EEI: A+

**Light engine with  
integrated HF sensor  
(motion, dimming,  
auto off at daylight)  
NEW!**

\* Nordland with 4000K available by request, contact your supplier.



# NORDKAPP



**NORDKAPP**  
 IP65, class I  
 Powder coated aluminium  
 wall light supplied with  
 opal polycarbonate lens.

Nordkapp is suitable  
 for wall and ceiling  
 mounting.

**Art. 1490**  
 2x26W, G24q-3, TC-DEL  
 Aluminium, 1490AL  
 Graphite, 1490GR  
 White, 1490W  
 EEI: A+..B

**Art. 1620**   
 11,3W LED  
 Aluminium, 1620AL  
 Graphite, 1620GR  
 White, 1620W  
 LED Module: 1100 lm,  
 3000K, 50000h, EEI: A+

\*Nordkapp with 4000K available  
 by request, contact you supplier.






# OPPLAND

NEW



LED



**OPPLAND**  
IP65, klasse I  
Powder coated aluminium  
bollard. Ideal for path-way-  
lighting where light  
pollution is an issue.  
**NEW!**

**Art. 1321**   
10,9W LED  
Aluminium, 1321AL  
Graphite, 1321GR  
LED module: 1180 lm,  
3000K, 50000h, EEI: A++

**Accessories for Art. 1321**

**Art. 205**  
Concreting anchor

**Art. 206**  
Anchoring support












# MOLDE



LED



**MOLDE**  
 IP54, classe I  
 Powder coated aluminium bollard.  
 Ideal for path-way-lighting where  
 light pollution is an issue.

**Art. 1901**   
 8,6W LED  
 Aluminium, 1901AL  
 Graphite, 1901GR  
 LED Module: 800 lm,  
 3000K, 50000h, EEI: A+

**Accessories**  
**Art. 1906**  
 Reinforced galvanized  
 metal foot for Molde

**Art. 1907**  
 Concreting anchor  
 for Molde

**Art. 1908**  
 Anchoring support  
 for Molde

# SCANDINAVIAN WOOD



Our new range of wooden bollards fits perfectly to all projects combining modern lighting in harmony with natural materials.  
We use a selection of first class Scandinavian pine wood, impregnated for protection.  
Easy maintenance: painted twice during production, refresh the surface with oil paint.

**Special marked with \*:**


Impregnated only: without painting on request to allow customized colours.




HALMSTAD

STOCKHOLM


ALTA



**Art. 1400**  
E27, 46W Halo. max  
Galvanized, 1400GA  
Black, 1400B  
EEI: A+




**Art. 1410**  
E27, 46W Halo. max  
Galvanized, 1410GA  
Black 1410B  
EEI: A+




**Art. 1420**  
E27, 46W Halo. max  
Galvanized, 1420GA  
Black 1420B  
EEI: A+



**Art. 1430**  
E27, 46W Halo. max  
Galvanized, 1430GA  
Black 1430B  
EEI: A+



**Art. 1440**  
E27, 46W Halo. max  
Galvanized, 1440GA  
Black 1440B  
EEI: A+




**Art. 1450**  
E27, 46W Halo. max  
Galvanized, 1450GA  
Black 1450B  
EEI: A+

**Scandinavian Wood**  
IP65, class II

**Accessories for  
Scandinavian  
wood.**

**Art. 205**  
Concreting anchor  
for wood series.

**Art. 206**  
Anchoring support  
for wood series.



**Scandinavian Wood**  
IP65, class II  
Impregnated only.


**Accessories for Scandinavian wood.**

**Art. 205**  
Concreting anchor  
for wood series.  
**Art. 206**  
Anchoring support  
for wood series.


**Art. 1403 \***  
E27, 46W Halo. max  
Galvanized, 1403GA  
Black, 1403B  
EEI: A+




**Art. 1413 \***  
E27, 46W Halo. max  
Galvanized, 1413GA  
Black, 1413B  
EEI: A+




**Art. 1423 \***  
E27, 46W Halo. max  
Galvanized, 1423GA  
Black, 1423B  
EEI: A+



**Art. 1433 \***  
E27, 46W Halo. max  
Galvanized, 1433GA  
Black, 1433B  
EEI: A+



**Art. 1443 \***  
E27, 46W Halo. max  
Galvanized, 1443GA  
Black, 1443B  
EEI: A+



**Art. 1453 \***  
E27, 46W Halo. max  
Galvanized, 1453GA  
Black, 1453B  
EEI: A+

\* Impregnated only; without painting on request to allow customized colours.



# HALMSTAD




**HALMSTAD**  
IP65, class II.  
**Bollards with LED MODULE: class I**

Galvanized heavy duty steel bollard supplied with opal polycarbonate lens.

**Accessories for Halmstad range**  
**Art. 205**

Concreting anchor


**Art. 206**  
Anchoring support





**Art. 210**  
E27, 46W Halo. max  
Galvanized, 210GA  
Black, 210B  
EEI: A+..d

**Art. 211**   
10W LED  
Galvanized, 211GA  
Black, 211B  
LED module > 900 lm,  
3000k, 50000h, EEI: A+  
dimmable (Triac)

**Art. 295**  
E27, 46W Halo. max  
Galvanized, 295GA  
Black, 295B  
EEI: A+..d


**Art. 1488**   
E27, 8,5W  
Galvanized, 1488GA  
Black, 1488B  
8,5W LED E27 included,  
806 lm, 2700K, 25000h,  
dimmable, EEI: A+




**Art. 1489**   
10W LED  
Galvanized, 1489GA  
Black 1489B  
LED module > 900 lm,  
3000k, 50000h, EEI: A+  
dimmable (Triac)



**Art. 296**  
E27, 46W Halo. max  
Galvanized, 296GA  
Black, 296B  
EEI: A+..d

**Art. 1483**   
E27, 8,5W  
Galvanized, 1483GA  
Black, 1483B  
8,5W LED E27 included,  
806 lm, 2700K, 25000h,  
dimmable, EEI: A+




**Art. 1482**   
10W LED  
Galvanized, 1482GA  
Black 1482B  
LED module > 900 lm,  
3000k, 50000h, EEI: A+  
dimmable (Triac)

\* With 4000K available by request, contact you supplier.





# ALTA



**ALTA**  
IP65, class II


**Bollards with LED MODULE: class I**

Galvanized steel bollard supplied with opal polycarbonate lens.

**Accessories**

- Art. 205**  
Concreting anchor for Alta range.
- Art. 206**  
Anchoring support for Alta range.


**Art. 291**  
E27, 46W Halo. max Galvanized, 291GA  
Black 291B  
EEI: A+


**Art. 1475**   
E27, 8,5W Galvanized, 1475GA  
Black, 1475B  
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

**Art. 1479**   
10W LED Galvanized, 1479GA  
Black 1479B  
LED module > 900 lm, 3000k, 50000h, EEI: A+ dimmable (Triac)

\* With 4000K available by request, contact you supplier.

**Art. 293**  
E27, 46W Halo. max Galvanized, 293GA  
Black 293B  
EEI: A+

**Art. 1477**   
E27, 8,5W Galvanized, 1477GA  
Black, 1477B  
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+

**Art. 1476**   
10W LED Galvanized, 1476GA  
Black 1476B  
LED module > 900 lm, 3000k, 50000h, EEI: A+ dimmable (Triac)








# STOCKHOLM



STOCKHOLM FAMILY →



**STOCKHOLM BOLLARD**  
Galvanized steel bollard.  
IP65, class II


**Bollards with LED module : class I**

**Accessories**


**Art. 205**  
Concreting anchor for Stockholm range.  
**Art. 206**  
Anchoring support for Stockholm range.

**Art. 288**  
E27, 46W Halo. max, Opal  
Galvanized, 288GA  
Black, 288B  
EEI: A+..D

**Art. 297**  
E27, 46W Halo. max Clear  
Galvanized, 297GA  
Black, 297B  
EEI: A+..D

**Art. 1265**   
10W LED  
Opal  
Galvanized, 1265GA  
Black 1265B  
LED module > 900 lm, 3000k, 50000h, dimmable triac, EEI: A+  
\* With 4000K available by request, contact you supplier


**Art. 1464**   
E27, 8,5W  
Opal  
Galvanized, 1464GA  
Black, 1464B  
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+



**Art. 289**  
E27, 46W Halo. max, Opal  
Galvanized, 289GA  
Black, 289B  
EEI: A+..D


**Art. 298**  
E27, 46W Halo. max Clear  
Galvanized, 298GA  
Black, 298B  
EEI: A+..D

**Art. 1260**   
10W LED  
Opal  
Galvanized, 1260GA  
Black 1260B  
LED module > 900 lm, 3000k, 50000h, dimmable Triac, EEI: A+

**Art. 1469**   
E27, 8,5W  
Opal  
Galvanized, 1469GA  
Black, 1469B  
8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEI: A+



**Art. 299**  
E27, 46W Halo. max, Opal  
Galvanized, 299GA  
Black, 299B  
EEI: A+..D

**Art. 1268**   
10W LED  
Opal  
Galvanized, 1268GA  
Black 1268B  
LED module > 900 lm, 3000k, 50000h, dimmable triac, EEI: A+










# STOCKHOLM



STOCKHOLM FAMILY →



**Stockholm flush**  
IP54, class I


Aluminium back plate. Front detail in powder coated or galvanized steel.

Art. 220, 1600  
Opal polycarbonate

Art. 226 :  
Clear polycarbonate

**Art. 220**  
E27, 46W Halo. max.  
Galvanized, 220GA  
Black, 220B  
EEI: A+..D

**Art. 226**  
E27, 46W Halo. max  
Galvanized, 226GA  
Black, 226B  
EEI: A+..D


**Art. 1600**   
8,6W LED  
Galvanized, 1600GA  
Black, 1600B  
LED Module: 800 lm,  
3000K, 50000h, EEI: A+



## STOCKHOLM



E27

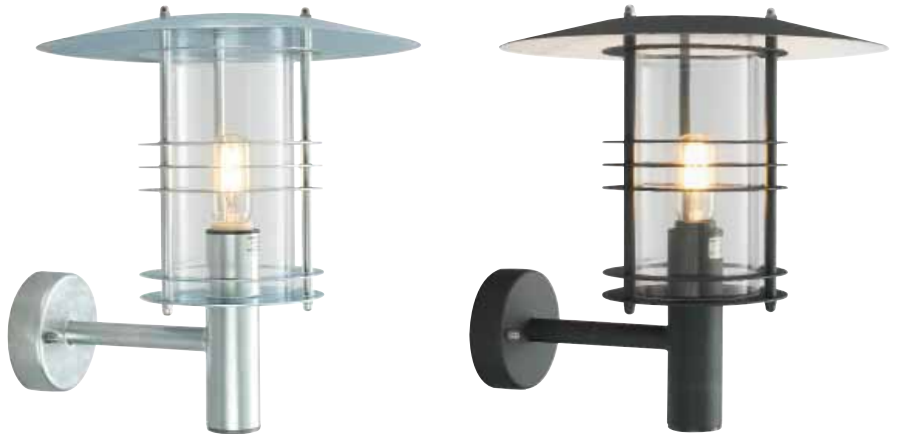


STOCKHOLM FAMILY →

### Stockholm

IP54, class II

Supplied with clear polycarbonate lens as standard. Natural copper option will age over time.

(Opal lens available as an option).




#### Art. 280

E27, 46W Halo. max. clear polycarbonate. Galvanized steel, 280GA  
Black, 280B  
White, 280W  
Copper, 280CO  
EEI: A+..D

#### Accessories

##### Art. 153

Corner bracket for Art. 280. Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO



#### Art. 286

E27, 77W Halo. max. clear polycarbonate. Galvanized steel, 286GA  
Black, 286B  
White, 286W  
EEI: A+..D

#### Accessories

##### Art. 153

Corner bracket for Art. 286. Galvanized steel, 153GA  
Black, 153B  
White, 153W







# STOCKHOLM




E27




**Art. 284**  
E27, 46W Halo. max. clear polycarbonate. Galvanized, 284GA  
Black, 284B  
White, 284W  
EEI: A+..D




**Art. 287**  
E27, 77W Halo. max. clear polycarbonate. Galvanized, 287GA  
Black, 287B  
White, 287W  
EEI: A+..D



**Art. 285**  
E27, 46W Halo. max. clear polycarbonate. Galvanized, 285GA  
Black, 285B  
White, 285W  
EEI: A+..D



**Art. 281**  
E27, 77W Halo. max. clear polycarbonate. Galvanized, 281GA  
Black, 281B  
White, 281W  
EEI: A+..D



**Art. 283**  
E27, 2x77W Halo. max. clear polycarbonate. Galvanized, 283GA  
Black, 283B  
White, 283W  
EEI: A+..D

**Stockholm**  
IP54, class II

Supplied with clear polycarbonate lens as standard.

Opal lens available as accessory.

## Accessories

**Art. 405** Concreting anchor for Art. 281 and 283.

**Art. 406** Anchoring support for Art. 281 and 283.

Concreting anchor included for Art. 284, 287 and 285

*Art. 284 round foot, diameter 11,5cm.*

*Art. 285 and 287 round foot, diameter 17cm.*

*Art. 281 and 283. Diameter foot 23,5 cm. The distance between bolt holes (3 bolts) for post Art. 281 and 283 is 18 cm.*













## BREMEN



E27 LED

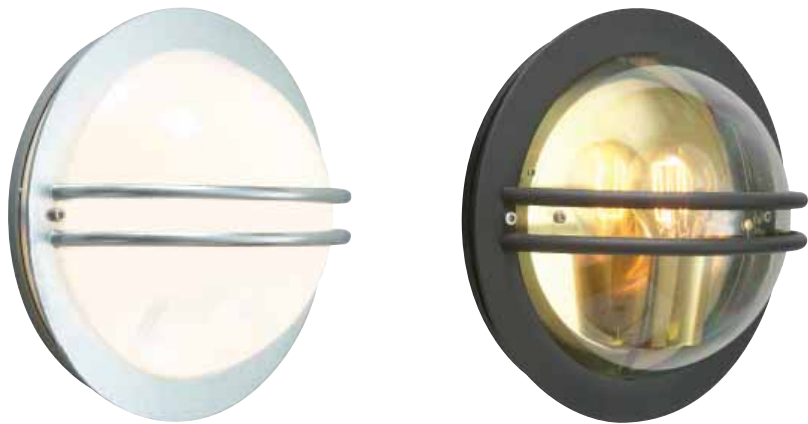

### BREMEN

IP54, class I

The front cover is made of steel and mounted on an aluminium backplate.  
Option of smoked or opal lens.

**Available on request:**  
Special finish in Black  
Copper.

**Art. 630**  
E27, 46W Halo. max.  
clear polycarbonate.  
Galvanized, 630GA  
Black, 630B  
EEI: A+.D



**Art. 631**  
E27, 46W Halo. max.  
opal polycarbonate.  
Galvanized, 631GA  
Black, 631B  
EEI: A+.D

**Art. 637**   
11,3W LED  
opal polycarbonate.  
Galvanized, 637GA  
Black, 637B  
LED Module: 1100 lm,  
3000K, 50000h, EEI: A+

## BERLIN



## HAMBURG



### BERLIN IP54, class I

Cast aluminium wall light with clear or opal polycarbonate lens options.

**Available on request:**  
Special finish in Black Copper.

**BERLIN  
Art. 610**  
E27, 46W Halo. max., clear polycarbonate.  
Black, 610B  
White, 610W  
Aluminium, 610AL  
EEI: A+..D

**Art. 611**  
E27, 46W Halo. max., opal polycarbonate.  
Black, 611B  
White, 611W  
Aluminium, 611AL  
EEI: A+..D

**BERLIN  
Art. 617**  
11,3W LED  
opal polycarbonate.  
Black, 617B  
White, 617W  
Aluminium, 617AL  
LED Module: 1100 lm,  
3000K, 50000h, EEI: A+



### HAMBURG IP54, class I

Cast aluminium wall light with clear or opal polycarbonate lens options.

**Available on request:**  
Special finish in Black Copper.

**HAMBURG  
Art. 620**  
E27, 46W Halo. max., clear polycarbonate.  
Black, 620B  
White, 620W  
Aluminium, 620AL  
EEI: A+..D

**Art. 621**  
E27, 46W Halo. max., opal polycarbonate.  
Black, 621B  
White, 621W  
Aluminium, 621AL  
EEI: A+..D










# LUND



E27



**LUND**  
IP55, Class II,  
Clear polycarbonate.

Art. 274, 275, 290  
Can be ordered with  
frosted glass or clear  
polycarbonate as  
accessories.

**Art. 290**  
E27, 57W Halo. max.  
Galvanized, 290GA  
Black, 290B  
EEI: A+..D

**Accessories**  
**Art. 153**  
Corner bracket  
for Art 290.  
Galvanized steel, 153GA  
Black, 153B

**Art. 274**  
E27, 57W Halo. max.,  
Galvanized, 274GA  
Black, 274B  
EEI: A+..D

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art. 274  
**Art. 406**  
Anchoring support  
for Art. 274

**Art. 275**  
E27, 2x57W Halo. max.  
Galvanized, 275GA  
Black, 275B  
EEI: A+..D

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art. 275  
**Art. 406**  
Anchoring support  
for Art. 275









# OSLO



E27



## OSLO

IP55, class II  
Clear polycarbonate.

All Oslo models can be ordered with frosted glass or clear polycarbonate as accessories.  
The copper will age naturally over time.

### Art. 240

E27, 57W Halo. max.  
Galvanized, 240GA  
Black, 240B  
White, 240W  
Copper, 240CO  
EEI: A+..D

### Accessories

**Art. 153**  
Corner bracket for Art 240.  
Galvanized, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO

### Art. 242

E27, 2x57W Halo. max.  
clear glass.  
Galvanized, 242GA  
Black, 242B  
White, 242W  
EEI: A+..D

### Accessories

**Art. 405**  
Concreting anchor for Art. 242.  
**Art. 406**  
Anchoring support for Art. 242

### Art. 245

E27, 57W Halo. max.  
clear glass  
Galvanized, 245GA  
Black, 245B  
White, 245W  
EEI: A+..D

### Accessories

Concreting anchor included.

*Art. 245 round foot, diameter 17cm.*

### ART. 240A (chain)



E27, 57W Halo. max.  
Galvanized steel, 240A/GA  
Black, 240A/B  
White, 240A/W  
Copper, 240A/CO  
EEI: A+..D







# PARIS





**PARIS**  
IP43, class I

This down light gives a subtle wash of light. Over time the copper will age naturally and acquire an antique brown patina.

**Art. 160**  
E27, 30W Halo. max.  
Galvanized, 160GA  
Black, 160B  
White, 160W  
Copper, 160CO  
EEI: A+..D

**Art. 163**  
E27, 46W Halo. max.  
Galvanized, 163GA  
Black, 163B  
White, 163W  
EEI: A+..D



**Art. 1495**   
6W LED  
Galvanized, 1495GA  
Black, 1495B  
White, 1495W  
LED Module: 628 lm,  
3000K, 50000h, EEI: A++

**Art. 1496**   
6W LED  
Galvanized, 1496GA  
Black, 1496B  
White, 1496W  
LED Module: 628 lm,  
3000K, 50000h, EEI: A++

# KARLSTAD



E27



## KARLSTAD

IP55, class II  
Supplied with Clear polycarbonate.

All Karlstad models can be ordered with frosted glass or clear polycarbonate as accessories.  
The copper will age naturally over time.

## Art. 230

E27, 57W Halo. max.  
Galvanized, 230GA  
Black, 230B  
White, 230W  
Copper, 230CO  
EEI: A+..D

## Accessories

### Art. 153

Corner bracket for Art 230.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO

## Art. 230A (chain)

E27, 57W Halo. max.  
Galvanized, 230A/GA  
Black, 230A/B  
White, 230A/W  
Copper, 230A/CO  
EEI: A+..D










## BERGEN



## VANSBRO



**BERGEN**  
IP55, Class II  
Supplied with clear polycarbonate lens.

Art. 270 and 271  
Can be ordered with frosted glass or clear polycarbonate as accessory.

**BERGEN**  
**Art. 270**  
E27, 57W Halo. max.  
Galvanized, 270GA  
Black, 270B  
White, 270W  
EEI: A+..D

**Accessories**  
**Art. 153**  
Corner bracket for Art 270.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W

**BERGEN**  
**Art. 271**  
E27, 57W Halo. max.  
Galvanized, 271GA  
Black, 271B  
White, 271W  
EEI: A+..D

**VANSBRO**  
IP55, class II  
Supplied with clear polycarbonate lens.  
  
The copper will age naturally over time.

**VANSBRO**  
**Art. 1920**  
E27, 57W Halo. max.  
Galvanized, 1920GA  
Black, 1920B  
White, 1920W  
Copper, 1920CO  
EEI: A+..D

**Accessories**  
**Art. 153**  
Corner bracket for Art 1920.  
Galvanized steel, 153GA  
Black, 153B  
White, 153W  
Copper, 153CO










# CHELSEA




E27




CHELSEA FAMILY →




**Art. 950**  
E27, 77W Halo. max.  
Copper, 950CO  
EEI: A+..D




**Art. 962**  
E27, 57W Halo. max.  
Copper, 962CO  
EEI: A+..D



**Art. 963**  
E27, 57W Halo. max.  
Copper, 963CO  
EEI: A+..D



**Art. 955**  
E27, 77W Halo. max.  
Copper, 955CO  
EEI: A+..D




**Art. 954**  
E27, 77W Halo. max.  
Copper, 954CO  
EEI: A+..D

**CHELSEA RANGE**  
IP44, class II  
Fabricated from copper and supplied with clear polycarbonate lens.  
Copper fittings are supplied in a raw finish to allow natural patina over time.  
Brackets and posts manufactured in aluminium and powder coated in black.


**Accessories**  
**Art. 152**  
Corner bracket for Art. 954.  
Black, 152B




# CHELSEA




**Art. 960**  
E27, 77W Halo. max.  
Copper, 960CO  
EEI: A+.D




**Art. 964**  
E27, 77W Halo. max.  
Copper, 964CO  
EEI: A+.D  
**NEW!**



**Art. 961**  
E27, 77W Halo. max.  
Copper, 961CO  
EEI: A+.D



**Art. 956**  
E27, 77W Halo. max.  
Copper, 956CO  
EEI: A+.D



**Art. 957**  
E27, 77W Halo. max.  
Copper, 957CO  
EEI: A+.D

**CHELSEA RANGE**  
IP44, class II  
Fabricated from copper and supplied with clear polycarbonate lens.  
Copper fittings are supplied in a raw finish to allow natural patina over time.  
Brackets and posts manufactured in aluminium and powder coated in black.

**Accessories**  
**Art. 152**  
Corner bracket for Art 960.

Black, 152B


**Accessories**  
**Art. 307**  
Concreting anchor for Art. 956

**Accessories**  
**Art. 307**  
Concreting anchor for Art. 957

# CHELSEA




E27



**Art. 951**  
E27, 77W Halo. max.  
Copper, 951CO  
EEI: A+..D

- Accessories**  
**Art. 305**  
Concreting anchor for Art. 951  
**Art. 306**  
Anchoring support for Art. 951

*Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm.*



**Art. 953**  
E27, 2x77W Halo. max.  
Copper, 953CO  
EEI: A+..D

- Accessories**  
**Art. 305**  
Concreting anchor for Art. 953  
**Art. 306**  
Anchoring support for Art. 953

*Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm.*



## GENOVA MINI



E27



## GENOVA




E27



## VENEDIG




E27



**GENOVA MINI**  
**Art. 175**

E27, 46W Halo. max.  
IP 54, class II,  
clear polycarbonate.


Black, 175B  
White, 175W  
EEI: A+..D



**GENOVA**  
**Art. 170**

E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 170B  
White, 170W  
EEI: A+..D



**VENEDIG**  
**Art. 261**

E27, 46W Halo. max.  
IP54, class II,  
clear polycarbonate.

Black, 261B  
White, 261W  
EEI: A+..D



ART. 170







## GLASGOW



E27



## LATINA




E27



## ROMA




E27




**GLASGOW**  
**Art. 730**  
 E27, 46W Halo. max.  
 IP54, class II,  
 clear polycarbonate.

Black, 730B  
 White, 730W  
 EEI: A+..D



**LATINA**  
**Art. 105**  
 E27, 46W Halo. max.  
 IP44, class II,  
 frosted polycarbonate.

Black, 105B  
 White, 105W  
 EEI: A+..D



**ROMA**  
**Art. 169**  
 E27, 46W Halo. max.  
 IP54, class II,  
 clear polycarbonate.




Black, 169B  
 White, 169W  
 EEI: A+..D

# LOFOTEN

NEW



E27



**LOFOTEN**  
IP44, classe II

Classic outdoor wall, pedestal or ceiling fixture with clear glass.

**Art. 1940**  
**Wall**  
E27, 57W Halo. max.  
Black, 1940B  
EEI: A+..D

**Art. 1941**  
**Pedestal**  
E27, 57W Halo. max.  
Black, 1941B  
EEI: A+..D  
**NEW!**

**Art. 1942**  
**Ceiling**  
E27, 57W Halo. max.  
Black, 1942B  
EEI: A+..D  
**NEW!**






# LONDON



E27




LONDON FAMILY →




**Art. 480**  
E27, 77W Halo. max.  
Black, 480B  
White, 480W  
EEI: A+.D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 480.  
Black, 152B  
White, 152W




**Art. 490**  
E27, 77W Halo. max.  
Black, 490B  
White, 490W  
EEI: A+.D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 490.  
Black, 152B  
White, 152W




**Art. 481**  
E27, 77W Halo. max.  
Black, 481B  
White, 481W  
EEI: A+.D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 481.  
Black, 152B  
White, 152W



**Art. 493**  
E27, 77W Halo. max.  
Black, 493B  
White, 493W  
EEI: A+.D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 493.  
Black, 152B  
White, 152W



**Art. 497**  
E27, 57W Halo. max.  
Black, 497B  
White, 497W  
EEI: A+.D

All London range.  
Supplied with lightly tinted  
polycarbonate lens

Art 480, 481, 490 and 493:  
IP54, class II

Art 497:  
IP65, class II



ART. 490








# LONDON




E27




LONDON FAMILY →




**Art. 484**  
E27, 77W Halo. max.  
Black, 484B  
White, 484W  
EEI: A+..D




**Art. 494**  
E27, 77W Halo. max.  
Black, 494B  
White, 494W  
EEI: A+..D



**Art. 485**  
E27, 77W Halo. max.  
Black, 485B  
White, 485W  
EEI: A+..D



**Art. 481A**  
E27, 77W Halo. max.  
Black, 481A/B  
White, 481A/W  
EEI: A+..D



**Art. 493A**  
E27, 77W Halo. max.  
Black, 493A/B  
White, 493A/W  
EEI: A+..D

All London range.  
IP54, class II.  
Supplied with lightly tinted polycarbonate lens

**Art. 484 and 485**  
square base- 16,5 cm. Distance between the two holes 9 cm.  
**Art. 494**  
square base- 20 cm. Distance between the two holes 9 cm.

#### Accessories

**Art. 307**  
Concreting anchor for Art. 484

#### Accessories

**Art. 307**  
Concreting anchor for Art. 494.


#### Accessories

**Art. 307**  
Concreting anchor for Art. 485.


# LONDON




E27




**Art. 491**  
E27, 77W Halo. max.  
Black, 491B  
White, 491W  
EEI: A+..D




**Art. 492**  
E27, 2x77W Halo. max.  
Black, 492B  
White, 492W  
EEI: A+..D



**Art. 483**  
E27, 3x77W Halo. max.  
Black, 483B  
White, 483W  
EEI: A+..D



**Art. 482**  
E27, 2x77W Halo. max.  
Black, 482B  
White, 482W  
EEI: A+..D



**Art. 495**  
E27, 3x77W Halo. max.  
Black, 495B  
White, 495W  
EEI: A+..D

All London range.  
IP54, class II.  
Supplied with lightly tinted polycarbonate lens.  
*Hexagonal foot. Distance between the three holes is 20,5 cm.*

## Accessories London Range

### Art. 305

Concreting anchor for Art. 482, 483, 491, 492 and 495

### Art. 306

Anchoring support for Art. 482, 483, 491, 492 and 495










## MODENA



E27




MODENA FAMILY →




**Art. 351**  
E27, 77W Halo. max.  
Black, 351B  
White, 351W  
EEI: A+..D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 351.  
Black, 152B  
White, 152W




**Art. 381**  
E27, 77W Halo. max.  
Black, 381B  
White, 381W  
EEI: A+..D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 381.  
Black, 152B  
White, 152W



**Art. 350**  
E27, 77W Halo. max.  
Black, 350B  
White, 350W  
EEI: A+..D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 350.  
Black, 152B  
White, 152W



**Art. 380**  
E27, 77W Halo. max.  
Black, 380B  
White, 380W  
EEI: A+..D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 380.  
Black, 152B  
White, 152W












# MODENA



MODENA FAMILY →



Art. 351A



Art. 381A



**Art. 300**  
E27, 77W Halo. max.  
Black, 300B  
White, 300W  
EEI: A+..D



**Art. 384**  
E27, 77W Halo. max.  
Black, 384B  
White, 384W  
EEI: A+..D



**Art. 304**  
E27, 77W Halo. max.  
Black, 304B  
White, 304W  
EEI: A+..D

All Modena range.  
IP 54, class II.  
Supplied with lightly tinted polycarbonate lens

**Art. 381A BIG (chain)**  
E27, 77W Halo. max.  
Black, 381A/B  
White, 381A/W  
EEI: A+..D

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 300


**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 384

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 304


# MODENA




E27




**Art. 301**  
E27, 77W Halo. max.  
Black, 301B  
White, 301W  
EEI: A+..D




**Art. 382**  
E27, 2x77W Halo. max.  
Black, 382B  
White, 382W  
EEI: A+..D



**Art. 303**  
E27, 3x77W Halo. max.  
Black, 303B  
White, 303W  
EEI: A+..D



**Art. 302**  
E27, 2x77W Halo. max.  
Black, 302B  
White, 302W  
EEI: A+..D



**Art. 397**  
E27, 3x77W Halo. max.  
Black, 397B  
White, 397W  
EEI: A+..D

All Modena range.  
IP 54, class II.  
Supplied with lightly tinted polycarbonate lens

## Accessories for Modena

### Art. 305

Concreting anchor for Art. 301, 302, 303, 382 and 397

### Art. 306

Anchoring support for Art. 301, 302, 303, 382 and 397









# BOLOGNA



E27



**Art. 360**  
tinted globe.  
E27, 46W Halo max.  
Black, 360B  
White, 360W  
EEI: A+..D



**Art. 310**  
tinted globe.  
E27, 46W Halo max.  
Black, 310B  
White, 310W  
EEI: A+..D



**Art. 310A**  
tinted globe.  
E27, 46W Halo max.  
Black, 310A/B  
White, 310A/W  
EEI: A+..D

Bologna range.  
Globe: Clear tinted polycarbonate  
or opal polycarbonate globe.  
Class II, IP54.

### Accessories

#### Art. 152

Corner bracket for  
Art. 360, 361, 310 and 311  
Black, 152B  
White, 152W

**Art. 361**  
opal globe.  
E27, 46W Halo max.  
Black, 361B  
White, 361W  
EEI: A+..D

**Art. 311**  
opal globe.  
E27, 46W Halo max.  
Black, 311B  
White, 311W  
EEI: A+..D




**Art. 311A,**  
opal globe.  
E27, 46W Halo max.  
Black, 311A/B  
White, 311A/W  
EEI: A+..D



## BOLOGNA



E27



Bologna range.  
Globe: Clear tinted polycarbonate  
or opal polycarbonate globe.  
Class II, IP54.

### Accessories

**Art. 305**, Concreting anchor  
for Art. 362, 363, 364 and 365.

**Art. 306**, Anchoring support  
for Art. 362, 363, 364 and 365.

**Art. 307**  
Concreting anchor for  
Art. 312, 313, 314 and 315.

**Art.312**  
tinted globe.  
E27, 46W Halo max.  
Black, 312B  
White, 312W  
EEI: A+..D

**Art.313**,  
opal globe.  
E27, 46W Halo max.  
Black, 313B  
White, 313W  
EEI: A+..D

**Art. 314**  
tinted globe.  
E27, 46W Halo max.  
Black, 314B  
White, 314W  
EEI: A+..D

**Art. 315**  
opal globe.  
E27, 46W Halo max.  
Black, 315B  
White, 315W  
EEI: A+..D

**Art. 362**,  
tinted globe.  
E27, 2x46W Halo max.  
Black, 362B  
White, 362W  
EEI: A+..D

**Art. 363**,  
opal globe.  
E27, 2x46W Halo max.  
Black, 363B  
White, 363W  
EEI: A+..D

**Art. 364**  
tinted globe.  
E27, 3x46W Halo max.  
Black, 364B  
White, 364W  
EEI: A+..D

**Art. 365**  
opal globe.  
E27, 3x46W Halo max.  
Black, 365B  
White, 365W  
EEI: A+..D


**Art. 362, 363, 364 and 365** Hexagonal foot. 3 holes for anchoring. Distance between holes: 20,5 cm. (three bolts).  
**Art. 312, 313, 314 and 315** has a square feet 16,5 cm. Distance between the two bolt holes is 9 cm.



# COMO




E27




**Art. 370**  
E27, 57W Halo. max.  
Black, 370B  
White, 370W  
EEI: A+..D

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 370.  
Black, 152B  
White, 152W




**Art. 375**  
E27, 57W Halo. max.  
Black, 375B  
White, 375W  
EEI: A+..D

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 375




**Art. 371**  
E27, 57W Halo. max.  
Black, 371B  
White, 371W  
EEI: A+..D

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 371  
**Art. 306**  
Anchoring support for  
Art. 371



**Art. 372**  
E27, 2x57W Halo. max.  
Black, 372B  
White, 372W  
EEI: A+..D

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 372  
**Art. 306**  
Anchoring support for  
Art. 372



**Art. 373**  
E27, 3x57W Halo. max.  
Black, 373B  
White, 373W  
EEI: A+..D

**Accessories**  
**Art. 305**  
Concreting anchor for  
Art. 373  
**Art. 306**  
Anchoring support for  
Art. 373

All Como range.  
IP54, class II.  
Lightly tinted polycarbonate.  
Opal polycarbonate on request.

**Art. 371, 372 og 373:** Hexagonal foot. Distance between the three holes is 20,5 cm.  
**Art. 375:** Square base- 16,5 cm. Distance between the two holes 9 cm.






## FIRENZE




E27




**Art. 800A**  
E27, 57W Halo. max.  
Black, 800A/B  
White, 800A/W  
EEI: A+..D




**Art. 800**  
E27, 57W Halo. max.  
Black, 800B  
White, 800W  
EEI: A+..D




**Art. 805**  
E27, 57W Halo. max.  
Black, 805B  
White, 805W  
EEI: A+..D



**Art. 810**  
E27, 57W Halo. max.  
Black, 810B  
White, 810W  
EEI: A+..D



**Art. 820**  
E27, 2x57W Halo. max.  
Black, 820B  
White, 820W  
EEI: A+..D



**Art. 830**  
E27, 3x57W Halo. max.  
Black, 830B  
White, 830W  
EEI: A+..D

All Firenze range.  
IP54, class II.  
Lightly tinted  
polycarbonate.  
Opal polycarbonate  
on request.

**Accessories**  
**Art. 152**  
Corner bracket for  
Art. 800  
Black, 152B  
White, 152W

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 805

**Accessories**  
**Art. 305**  
Concreting anchor for Art. 810, 820 and 830  
**Art. 306**  
Anchoring support for Art. 810, 820 and 830




**Art. 810, 811, 820:** Hexagonal foot. Distance between the three holes is 20,5 cm.  
**Art. 805:** Square base- 16,5 cm. Distance between the two holes 9 cm.



# RIMINI / MILANO



E27



Concerns Rimini/ Milano range.  
Glass: clear polycarbonate lens.  
Class II, IP 54.

Rimini range contains of art.  
259, 2591, 250, 402, 403 and 404.

Milano range contains of art. 401

**Art. 259**  
E27, 46W Halo max.  
Black, 259B  
White, 259W  
EEI: A+..D

**Accessories**  
**Art. 150**  
Corner bracket for  
Art. 259 and 2591

Black, 150B  
White, 150W

**Art. 2591**  
E27, 46W Halo max.  
Black, 2591B  
White, 2591W  
EEI: A+..D

**Accessories**  
**Art. 150**  
Corner bracket for  
Art. 259 and 2591

Black, 150B  
White, 150W


**Art. 250**  
E27, 46W Halo max.  
Black, 250B  
White, 250W  
EEI: A+..D

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 250 and  
404.

# RIMINI / MILANO




E27




**Art. 404**  
E27, 46W Halo max.  
Black, 404B  
White, 404W  
EEI: A+..D

**Accessories**  
**Art. 307**  
Concreting anchor  
for Art. 250 and  
404.




**Art. 401**  
E27, 77W Halo max.  
Black, 401B  
White, 401W  
EEI: A+..D

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art.401  
**Art. 406**  
Anchoring support  
for Art. 401



**Art. 402**  
E27, 2x46W Halo max.  
Black, 402B  
White, 402W  
EEI: A+..D

**Accessories**  
**Art. 405**  
Concreting anchor for  
Art.402  
**Art. 406**  
Anchoring support  
for Art. 402



**Art. 403**  
E27, 3x46W Halo max.  
Black, 403B  
White, 403W  
EEI: A+..D

**Accessories**  
**Art. 405**  
Concreting anchor  
for Art.403  
**Art. 406**  
Anchoring support for  
Art. 403


Rimini/ Milano range.  
Glass: clear polycarbonate lens.  
Class II, IP 54.

Rimini range contains of art. 259,  
259I, 250, 402, 403 og 404.


Milano range contains of art. 401




# ACCESSORIES FOR NORLYS LAMPS




**Art. 150**  
Corner bracket  
Rimini




**Art. 152**  
Corner bracket  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 153**  
Corner bracket  
Stockholm  
Oslo  
Lund  
Bergen  
Karlstad  
Vansbro




**Art. 154**  
Arm for  
Visby  
Nice




**Art. 156**  
Corner bracket  
Helsinki  
(Only 880, 882,  
883)




**Art. 158**  
Corner bracket  
Helsinki  
Koster




**Art. 205**  
Concreting anchor  
Halmstad bollard  
Stockholm bollard  
Alta Bollard  
Scandinavian wood  
Egersund Mini  
Oppland




**Art. 206**  
Anchoring support  
Halmstad bollard  
Stockholm bollard  
Alta Bollard  
Scandinavian wood  
Egersund Mini  
Oppland




**Art. 307**  
Concreting anchor  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 305**  
Concreting anchor  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 306**  
Anchoring support  
Chelsea  
Bologna  
London  
Modena  
Como  
Firenze




**Art. 505**  
Concreting anchor  
Narvik




**Art. 405**  
Concreting anchor  
Stockholm  
Oslo  
Lund  
Rimini/Milano  
Koster  
Helsinki




**Art. 406**  
Anchoring support  
Stockholm  
Oslo  
Lund  
Rimini/Milano  
Koster  
Helsinki




**Art. 1128**  
Concreting anchor  
Oslo 245  
Arvika 890-897  
Stockholm 285, 287




**Art. 1230**  
Concreting anchor  
Stavanger  
Egersund




**Art. 1231**  
Anchoring support  
Stavanger  
Egersund




**Art. 1906**  
Reinforced galvanized  
metal foot for Molde




**Art. 1907**  
Concreting anchor  
Molde  
Asker




**Art. 1908**  
Anchoring support  
Molde  
Asker



**Art. 112**  
Anchoring support  
Namsos




**Art. 113**  
Concreting anchor  
Namsos

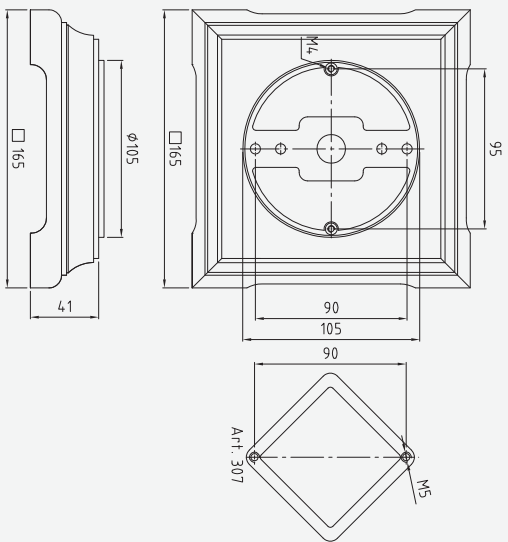

**Dimensions of base art.**

Bologna	312
Bologna	313
Bologna	314
Bologna	315
Chelsea	956
Chelsea	957
Como	375
Firenze	805
London	484
London	485
Modena	300
Modena	304


(165mm)

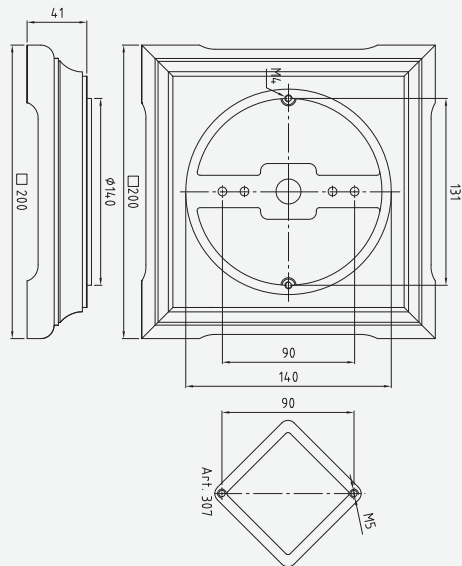

**Dimensions of base art.**


London	494
Modena	384

(200mm)

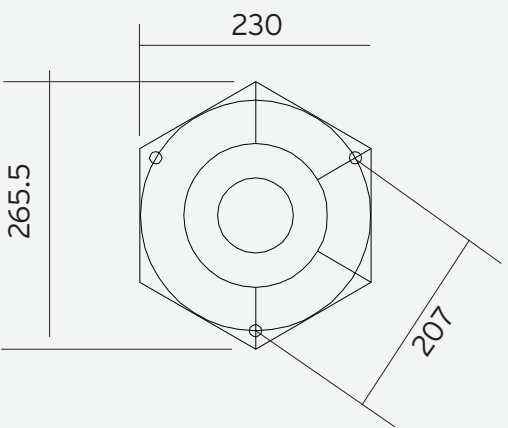

**Dimensions of base art.**

Bologna	362
Bologna	363
Bologna	364
Bologna	365
Chelsea	951
Chelsea	953
Como	371
Como	372
Como	373
Firenze	810
Firenze	820
Firenze	830
London	482
London	483
London	491
London	492
Mondena	301
Mondena	302
Mondena	303
Mondena	382

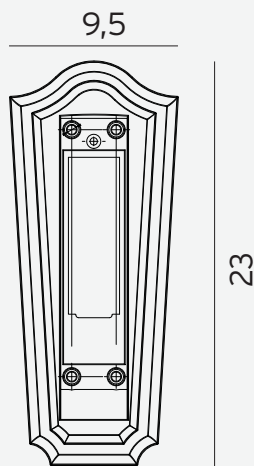

**Dimensions of wall bracket**

Bologna	310
Bologna	311
Bologna	360
Bologna	361
Chelsea	954
Chelsea	960
Como	370
Firenze	800
London	480
London	481
London	490
London	493
Modena	350
Modena	351
Modena	380
Modena	381

Norlys AS  
P.B 1014 Hoff, 0218 Oslo  
Hovfaret 4B, 0275 Oslo  
Norway  
Tel. +47 24 12 40 10  
Fax. +47 24 12 40 11  
[www.norlys.com](http://www.norlys.com)  
E-mail: [firmapost@norlys.no](mailto:firmapost@norlys.no)