



NORLYS

Brightening your life with our passion for light

Inspired by the simplicity and timeless aesthetics of Scandinavian design, we draw from nature to craft lighting fixtures that exude elegance and sophistication. NORLYS products embody the core values of Scandinavian design, embracing minimalism, functionality and enduring beauty. With NORLYS, you can trust that our lighting solutions will effortlessly integrate into any space, elevating its ambiance and leaving a lasting impression.



30 + _____ years on the market

300 + _____ team members

24 _____ countries

5 mln _____ unit sold

We're focused on our core values

At NORLYS, our values are at the core of everything we do. They shape our culture, inspire our actions, and drive our passion for delivering the best lighting solutions. We believe that by upholding these values, we can make a positive impact on the world of lighting.



For people

We're field experts who enjoy sharing knowledge and cherish long lasting customer relationships.


Commitment to our Clients has been our path for years, and we tread it with confidence. We support with pre-sales advice and information, and we follow up after the purchase. They can count on our openness and professionalism. They can rely on us. We put the Clients at the center of everything we do. We strive to deeply understand their varied needs, to allay fears, and surpass expectations with a wide range of diverse and unique products and services tailored to individual needs.



Responsibility

We shape the world with gentle passion, showcasing its beauty in the finest light, because it deserves nothing less.

We can't operate any other way. We want to leave the world as we found it, with all its beauty and diversity. We responsibly use renewable resources, continuously improve energy-efficient production methods, and create top-quality luminaries with a minimal impact on the environment. Building a responsible and ethical company is a continuous, long-term effort on processes without compromises or half measures.



Passion for light

We focus on the future, emphasizing sustainability and our impact on future generations.

We strive to create extraordinary places, providing unique lighting experiences. By combining cutting-edge innovations, professionalism, enthusiasm, and the experience of our team, we obtain a powerful tool. A tool for extracting the best qualities and meanings from spaces. Our commitment to designing unique and practical lighting solutions enriches and invigorates space.



Over 30 years of experience

NORLYS is the embodiment of the Scandinavian spirit. It was born in the frosty North in Norway, reflecting its simplicity, resilience, and naturalness. NORLYS is the answer to the long polar nights, the harshness of nature, and the need for safety. That is why we have been lighting spaces for 30 years. It is our passion and mission.

Today our main production plant and stock facilities are established in Poland and Sweden. We have our own aluminium foundry, a press department for the production of steel luminaires, and a hot-dip galvanising department. Apart from that, we have a machining department which includes CNC machining, a powder-coating department, and assembly departments. Our pride is our own Testing Laboratory equipped with specialised equipment of the highest class for the testing of luminaires. This lab performs measurements according to the requirements specific to ENEC and in accordance with the ISO 17025 standard.

We are an international company. Our subsidiaries located in Norway, Sweden, France, Italy and Poland are accompanied by an extensive worldwide sales network of professional distributors. This year, we are proud to announce that we have achieved the EcoVadis Bronze certification, reaffirming our commitment to sustainable development and corporate social responsibility.



Brand new production hall (1998)



Swedish warehouse (2011)



Die casting and tool shop (2011)



New warehouse and assembly (2015)

How to read the catalogue?




Diagram illustrating the layout of a catalogue page for a luminaire, with labels pointing to various sections:

- Main studio picture**: Points to the large central image area.
- Luminaire application**: Points to the word "Wall".
- Luminaire name**: Points to the large "Name" text.
- Luminaire style**: Points to the "Modern" label.
- Technical icons - you'll find icon index on page 419**: Points to the grid of technical icons including CE, 220-240V, IP65, IK08, LED, E14, GL, and AI.
- Extra photos**: Points to the two smaller square images below the technical icons.
- Available colours**: Points to the "Colour:" section listing Graphite and Black.
- Colour temperature**: Points to the 2700K and 4000K section with a color gradient bar.
- Special features**: Points to the icons for extreme conditions and replaceable electrical kit.
- Accessories**: Points to the "Accessories:" section at the bottom.

Wall

Modern

Name

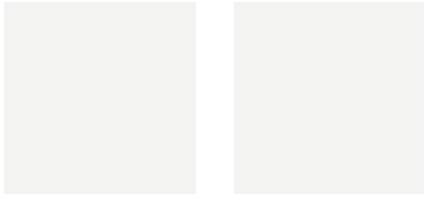

Colour:
Graphite
Black

Available colours

Colour temperature:
2700K 4000K


Special features

Luminaire suitable for extreme conditions.

Fully replaceable electrical kit.

Accessories:

Art. XXX
Type of accessorie.



Families

A p.43 Alta
 p.19 Arendal
 p.13 Arendal Mini
 p.295 Arvika
 p.23 Asker
B p.299 Basel
 p.241 Bergen
 p.244 Berlin
 p.303 Bern
 p.307 Boden
 p.348 Bologna
 p.51 Borg
 p.59 Bornholm
 p.246 Bremen
C p.335 Chelsea
 p.358 Como
E p.73 Egersund
 p.63 Egersund Mini
 p.75 Egersund Park
F p.365 Florence
G p.81 Geneva
 p.373 Genoa
 p.375 Glasgow
 p.87 Glode
 p.85 Grimstad
H p.99 Halden
 p.89 Halmstad
 p.109 Hammerfest
 p.101 Hellvik
 p.107 Hitra
K p.311 Karlstad
 p.113 Kisa
 p.119 Koster
L p.262 Larvik
 p.395 Latina
 p.129 Lillehammer
 p.133 Lillesand
 p.249 Lofoten
 p.377 London
 p.316 Lund
 p.137 Lysfjord
M p.321 Mandal
 p.415 Milano
 p.397 Modena
 p.142 Molde
 p.147 Mora
 p.149 Moss
N p.169 Namsos
 p.165 Narvik

p.181 Nice
 p.163 Nidaros
 p.159 Nordland
 p.183 Oppland
 p.264 Oslo
 p.325 Paris
 p.417 Poles
R p.189 Rena
 p.411 Rimini
 p.197 Rondane
S p.205 Sande
 p.199 Sandvik
 p.330 Ski
 p.202 Skara
 p.207 Sol
 p.211 Stavanger
 p.272 Stockholm
T p.227 Torp
 p.229 Trysil
 p.333 Vansbro
 p.219 Vasa
 p.409 Venice
 p.225 Varberg
 p.221 Visby
 p.215 Voss

Modern

Classic

Industrial

Loft

Wall

Arendal



p.15

Asker



p.25

Asker Big



p.29

Basel



p.299

Bergen



p.241

Berlin



p.245

Bern



p.303

Boden



p.307

Bologna



p.349

Bologna



p.349

Borholm



p.59

Bremen



p.247

Chelsea




p.337

Chelsea



p.337

Chelsea



p.339

Chelsea Big



p.339

Como



p.359

Florence



p.365

Geneva



p.81

Genoa



p.373

Genoa Mini



p.373

Glasgow



p.375

Halden



p.99

Hitra



p.105

Karlstad



p.311

Koster



p.121

Larvik



p.263

Latina



p.395

Lillehammer



p.129

Lofoten



p.249

Lofoten



p.254

London



p.377

London



p.383

London Big



p.379

Lund



p.317

Lysfjord



p.137

Mandal



p.323

Mandal



p.323

Modena



p.397

Modena Big



p.397

Modena Big



p.397

Molde



p.142

Namsos



p.171

Nordland



p.159

Oslo



p.265

Paris




p.327

Paris Big



p.329

Rimini



p.413

Rondane



p.197

Sandvik



p.199

Sandvik



p.199

Ski



p.331

Stockholm



p.273

Stockholm



p.275

Stockholm Big



p.275

Torp



p.227

Vansbro



p.333

Vasa



p.219

Venice



p.409

Voss



p.215


Bollard

Alta



p.45

Alta




p.45

Alta



p.49

Alta



p.49

Arendal



p.19

Arendal



p.19

Arendal



p.19

Arendal Mini



p.17

Arendal Mini



p.17

Arvika



p.295

Arvika



p.295

Asker



p.33

Asker



p.33

Bologna



p.351

Bologna



p.351

Borg



p.53

Borg



p.53

Borg



p.53

Borg



p.53

Chelsea



p.343

Chelsea




p.343

Chelsea Big



p.343

Chelsea Big



p.343

Como



p.361

Egersund



p.73

Egersund



p.73

Egersund Mini




p.65

Egersund Mini



p.65

Egersund Mini



p.69

Egersund Mini



p.69

Egersund Park



p.77

Egersund Park



p.77

Florence



p.369

Glode



p.87

Glode



p.87

Halmstad



p.89

Index

Halmstad  p.89	Halmstad  p.89	Halmstad  p.95	Halmstad  p.95	Hellvik  p.101	Hellvik  p.101
Kisa  p.115	Lillesand  p.133	Lillesand  p.133	Lillesand  p.135	Lillesand  p.135	Lofoten  p.257
Lofoten  p.259	London  p.387	London  p.387	London Big  p.387	Modena  p.401	Modena  p.401
Modena Big  p.401	Molde  p.145	Molde  p.145	Namsos  p.173	Namsos  p.173	Narvik  p.165
Oppland  p.185	Oppland  p.187	Oslo  p.267	Rimini  p.411	Rimini  p.411	Skara  p.203
Stavanger  p.211	Stavanger  p.211	Stavanger  p.211	Stockholm  p.279	Stockholm  p.279	Stockholm  p.279
Stockholm  p.283	Stockholm  p.283	Stockholm  p.287	Stockholm  p.287	Stockholm Big  p.287	Trysil  p.231

Pole

Asker



Asker




Bologna



Borg



Chelsea



Como



Egersund Park



Florence



Hammerfest



Karlstad



Kisa



Koster



Lofoten



London



London Big




Lund



Milano



Modena



Modena Big



Mora




Nice



Oslo



Poles



Rimini



Stockholm



Visby



Trysil



Ceiling

Bornholm  p.59	Nordland  p.159	Nidaros  p.163	Nidaros  p.163	Nidaros  p.163	Sandvik  p.201
Sol  p.207	Bergen  p.243	Lofoten  p.254	Lofoten  p.254	Lofoten  p.255	Oslo  p.271
Karlstad  p.313	Chelsea  p.345	Florence  p.367	London  p.385	London Big  p.385	Latina  p.395
Modena  p.399	Modena Big  p.399				

Recessed & Spot

Grimstad  p.85	Grimstad  p.85	Moss  p.151	Moss  p.151	Moss  p.153	Moss  p.153
Moss  p.155	Moss  p.155	Moss  p.155	Moss  p.157	Moss  p.157	Namsos  p.177
Namsos  p.177	Namsos Mini  p.179	Rena  p.189	Rena  p.193	Sande  p.205	Varberg  p.225

Arendal Mini

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. In a modern design combining crystal with steel, the Arendal Mini will work well in a wide variety of space settings. The soft, harmonious light filtered through the satin-finished glass will introduce a pleasant atmosphere wherever it is used. The wall version of the lamp, made of aluminium, will be perfect as entrance lighting.





Arendal Mini



Colour:

- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Fully replaceable electrical kit.




Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1251BL	LED	4W	330lm	3000K	> 50 000h	Dimmable
1251GR				4000K		
1252BL						
1252GR						
1250BL	E14	-	-	-	-	-
1250GR						



Arendal Mini

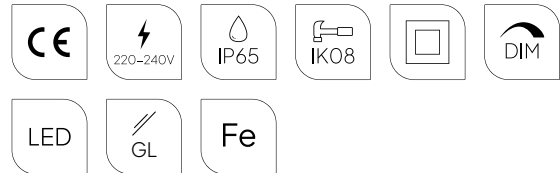

Colour:


- Graphite
- Galvanized
- Black

Colour temperature:

- 2700K*
 - 3000K
 - 4000K
- *2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Product Eco-friendly.

Accessories:


Art. 204


Ground anchor.



Art. 203

Concreting anchor.



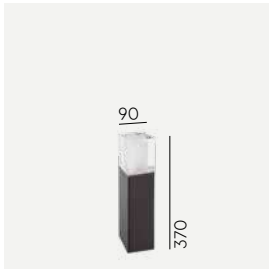

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1566BL	LED	4W	330 lm	3000K	>50 000h	Dimmable
1566GA						
1566GR			345 lm	4000K		
1567BL						
1567GA						
1567GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1561BL	LED	4W	330 lm	3000K	>50 000h	Dimmable
1561GA						
1561GR			345 lm	4000K		
1562BL						
1562GA						
1562GR						



Arendal

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. Three different heights make it easier to choose the right lamp for the garden path, driveway, terrace or house access. The effect will be even more intriguing when used together in the arrangement. The crystal shade used in the luminaire, additionally satin-finished on the inside, provides a gentle beam of light. Arendal is modern elegance and this design never gets old.





Arendal



Colour:

- Graphite
- Galvanized
- Black

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support





Art	Type of light source
1560BL	E27
1560GA	
1560GR	



Art	Type of light source
1565BL	E27
1565GA	
1565GR	



Art	Type of light source
1569BL	E27
1569GA	
1569GR	




Asker

Modern buildings need new solutions. The modern Asker luminaire family is ideally suited to this. Unconventional, minimalist lamps work well on a concrete or brick façade. But of course not only. The minimalist design makes it possible to match them to many variants of wall finishes, and the durable and proven materials used in the lamps guarantee many years of trouble-free use in difficult weather conditions. The lamps are also available in bollard and pole versions. The bold yet simple shapes have always been and will continue to be attractive to professional designers and individual investors alike.






Asker

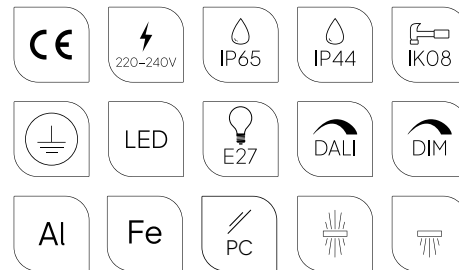


Colour:

- Graphite
- Aluminium
- Galvanized
- Black
- White


Colour temperature:



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1510AL	LED	8,8W	312lm	3000K	50 000h	Dimmable
1510BL						
1510GR						
1510WH						
5102AL						
5102BL						
5102GR		8,4W	798lm	3000K	>70 000h	
5102WH						
1720AL						
1720BL						
1720GR						
1720WH						
5150AL		8,3W	901lm	4000K	>70 000h	
5150BL						
5150GR						
5150WH						
5160AL						
5160BL						
5160GR	9,9W	852lm	3000K	>70 000h		
5160WH						
1721AL						
1721BL						
1721GR						
1721WH						
1513AL	E27	-	-	-	-	
1513BL						
1513GR						
1513WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1700GA	LED	8,4W	360lm	3000K	50 000h	Dimmable
5100GA			367lm	4000K		
1702GA	E27	-	-	-	-	-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1511AL	LED	8.8W	156lm	3000K	50 000h	Dimmable
1511BL						
1511GR						
1511WH						
5103AL						
5103BL		5.4W	164lm	4000K		
5103GR						
5103WH						
1726AL						
1726BL						
1726GR	5.5W	429lm	3000K	70 000h		
1726WH						
5151AL						
5151BL						
5151GR						
5151WH						
5157AL						
5157BL						
5157GR						
5157WH						
1727AL	E27	-	-	-	-	
1727BL						
1727GR						
1727WH						
1514AL						
1514BL						
1514GR						
1514WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1705GA	LED	8W	165lm	3000K	50 000h	Dimmable
5101GA			183lm	4000K		
1707GA	E27	-	-	-	-	-



Asker Big



CE	220-240V	IP65	IK08	Grounding symbol
LED	E27	DALI	DIM	PC
Al	Fe	Light bulb icon	Light bulb icon	



Colour:

- Graphite
- Aluminium
- Galvanized
- Black
- White


Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




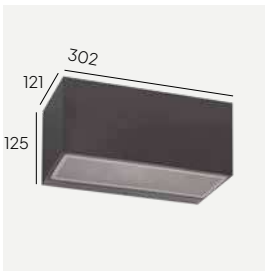

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1300AL	LED	8,3W	547lm	3000K	>72 000h	Dimmable	
1300BL							
1300GR							
1300WH							
5080AL		19,4W	1669lm	3000K	>72 000h	DALI2	
5080BL							
5080GR							
5080WH							
5086AL		19,3W	1942lm	4000K	>70 000h	DALI2	
5086BL							
5086GR							
5086WH							
5018AL		8,5W	550lm	4000K	>70 000h	DALI2	
5018BL							
5018GR							
5018WH							
1306AL	13,7W	1280lm	3000K	>70 000h	Dimmable		
1306BL							
1306GR							
1306WH							
5105AL		1313lm	4000K			>70 000h	Dimmable
5105BL							
5105GR							
5105WH							
1303AL	E27	-	-	-	-		
1303BL							
1303GR							
1303WH							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1710GA	LED	7,1W	649lm	3000K	70 000h	Dimmable
1712GA	E27	-	-	-	-	-




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1302AL	LED	5,2W	306lm	3000K	>70 000h	Dimmable
1302BL						
1302GR						
1302WH						
5104AL						
5104BL						
5104GR		13,6W	656lm	4000K	>70 000h	Dimmable
5104WH						
5106AL						
5106BL						
5106GR						
5106WH						
1308AL		10,2W	843lm	3000K	>72 000h	DALI2
1308BL						
1308GR						
1308WH						
5085AL						
5085BL						
5085GR						
5085WH						
5087AL	960lm	4000K	4000K	>70 000h	DALI2	
5087BL						
5087GR						
5087WH						
1305AL	E27	-	-	-	-	
1305BL						
1305GR						
1305WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1717GA	E27	-	-	-	-	-
1715GA	LED	5,3W	347lm	3000K	70 000h	Dimmable

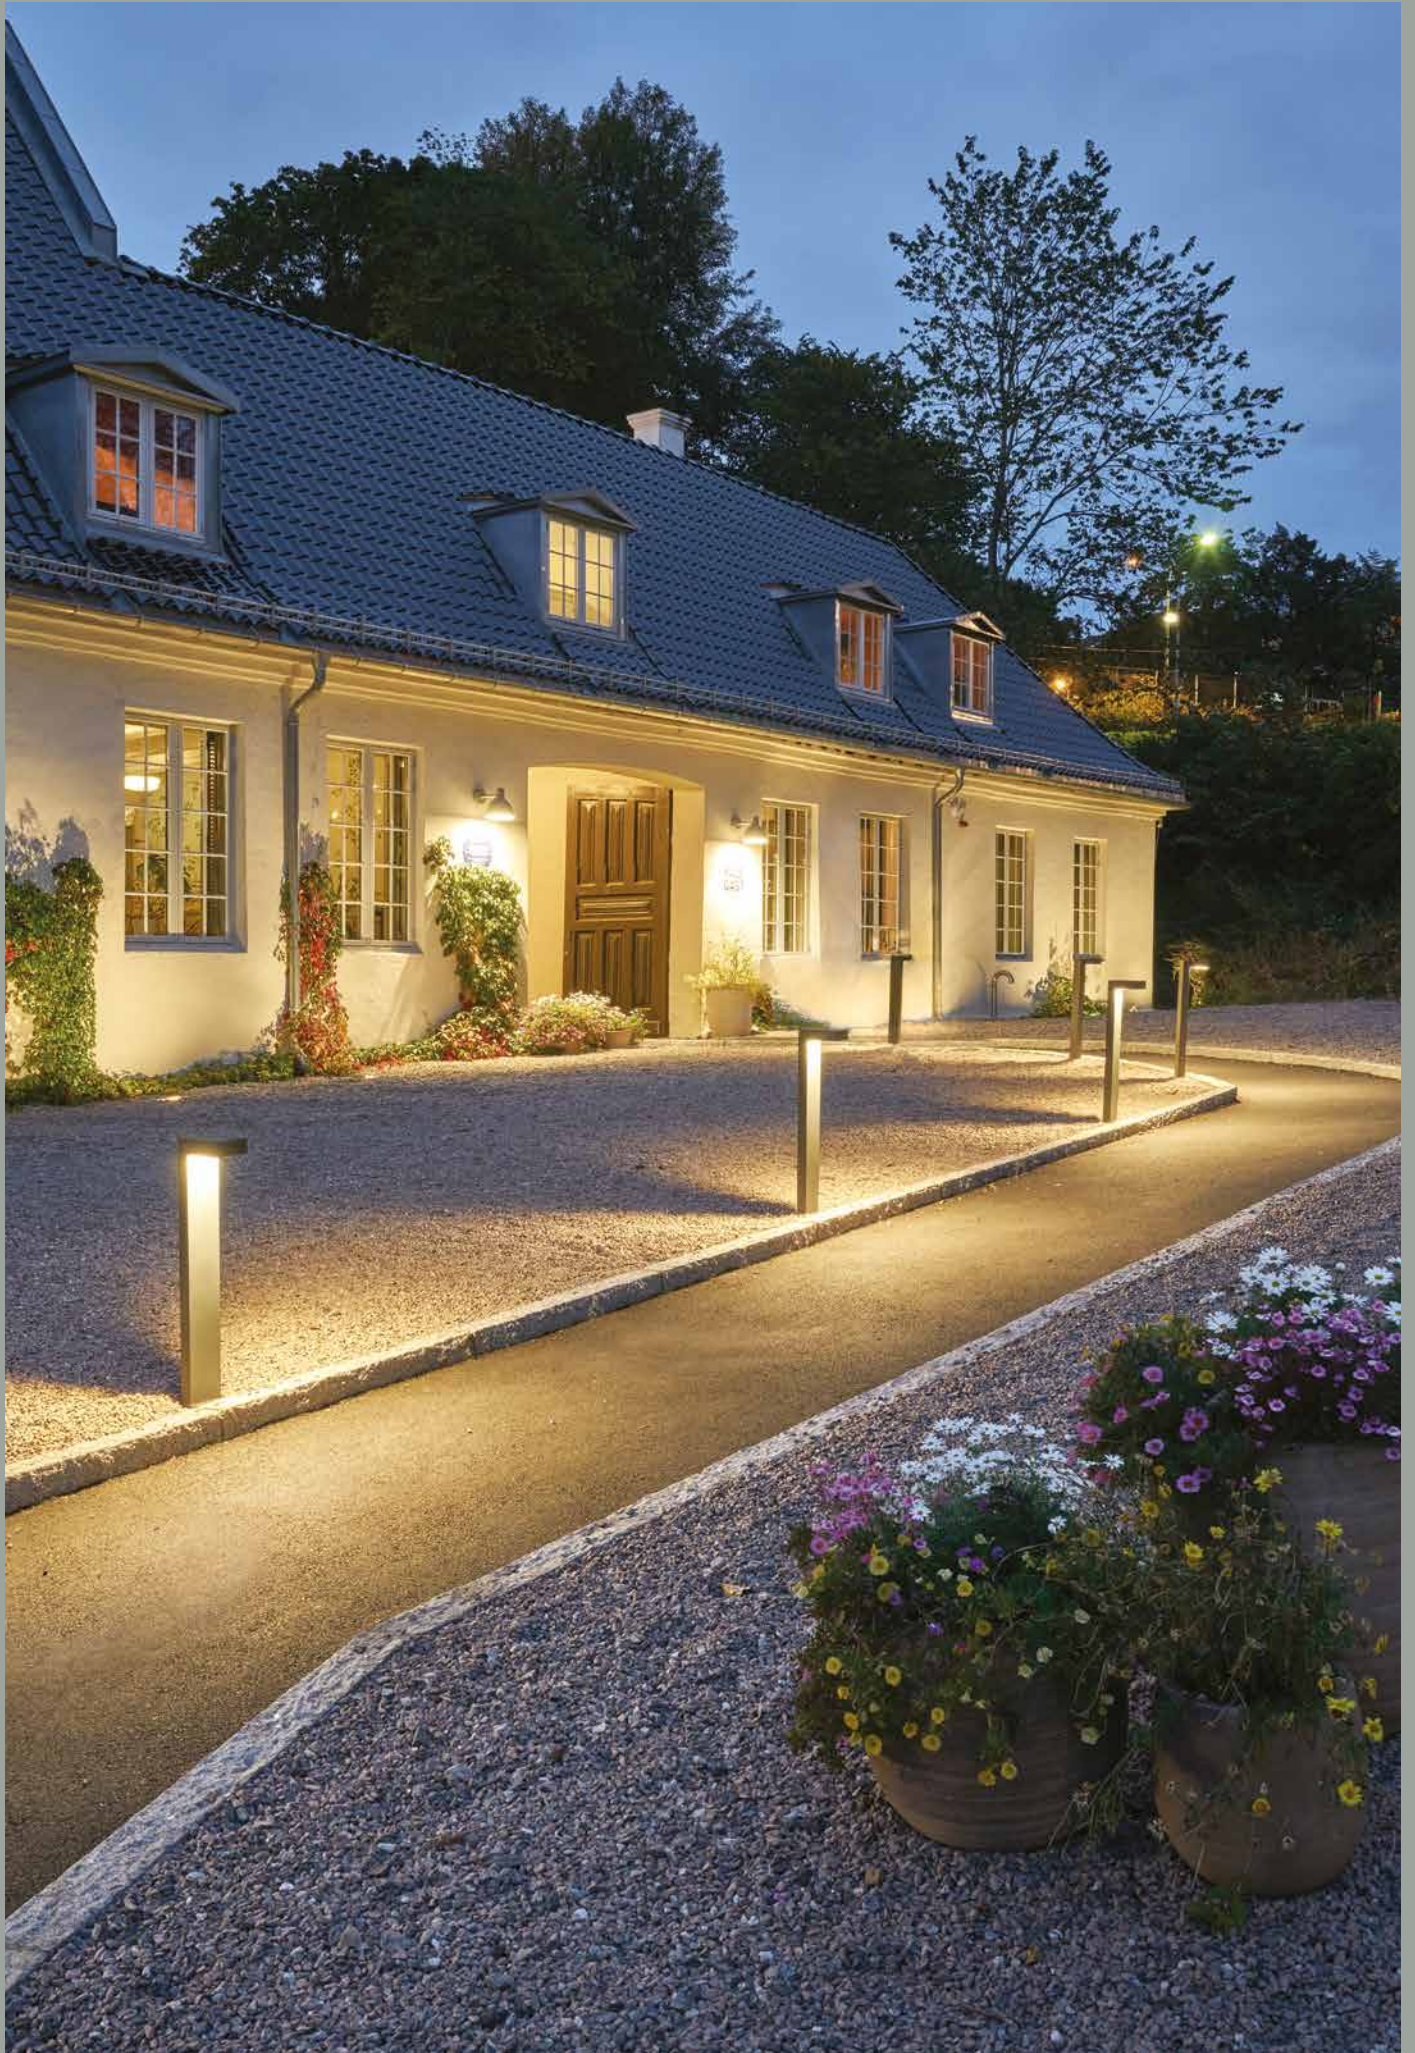

Asker Bollard

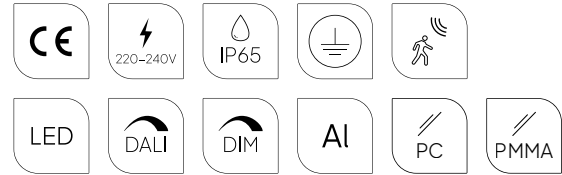

Colour:


- Graphite
- Aluminium
- Black

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1907


Concreting anchor



Art. 1908

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK	
1311AL	LED	9,5W	585lm	3000K	50 000h	-	-	IK10	
1311BL									
1311GR									
1314AL		7,7W	697lm		3000K	> 109 000h	Dimmable	IESNA type II/III	IK08
1314BL									
1314GR									
1315AL									
1315BL									
1315GR									
1316AL		7,7W	604lm		3000K	> 109 000h	Dimmable	IESNA type V	
1316BL									
1316GR									
1317AL									
1317BL									
1317GR									
1318AL		7,7W	724lm		4000K	> 109 000h	Dimmable	IESNA type II/III	
1318BL									
1318GR									
1319AL									
1319BL									
1319GR									
1320AL	7,7W	617lm	4000K	> 109 000h	Dimmable	IESNA type V			
1320BL									
1320GR									
1322AL									
1322BL									
1322GR									
5210AL	10W	394lm	3000K	> 55 000h	Dimmable	-	IK10		
5210BL									
5210GR									
5211AL		457lm	4000K						
5211BL									
5211GR									




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1338AL	LED	9,7W	585lm	3000K	50 000h	PIR
1338BL						
1338GR						
1339AL			640lm	4000K		
1339BL						
1339GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK
1310AL	LED	9,5W	585lm	3000K	50 000h	On/Off		IK10
1310BL								
1310GR								
5120AL								
5120BL								
5120GR								
5212AL		10W	394lm	3000K	> 55 000h			IK10
5212BL								
5212GR								
5213AL								
5213BL								
5213GR								
5214AL		7,7W	682lm	3000K	>109 000h	Dimmable	IESNA type II/III	IK08
5214BL								
5214GR								
5215AL								
5215BL			654lm	4000K				
5215GR								
5216AL	604lm		3000K					
5216BL								
5216GR								
5217AL								
5217BL	654lm	4000K						
5217GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1336AL	LED	9,7W	585lm	3000K	50 000h	PIR
1336BL						
1336GR						
1337AL			636lm	4000K		
1337BL						
1337GR						

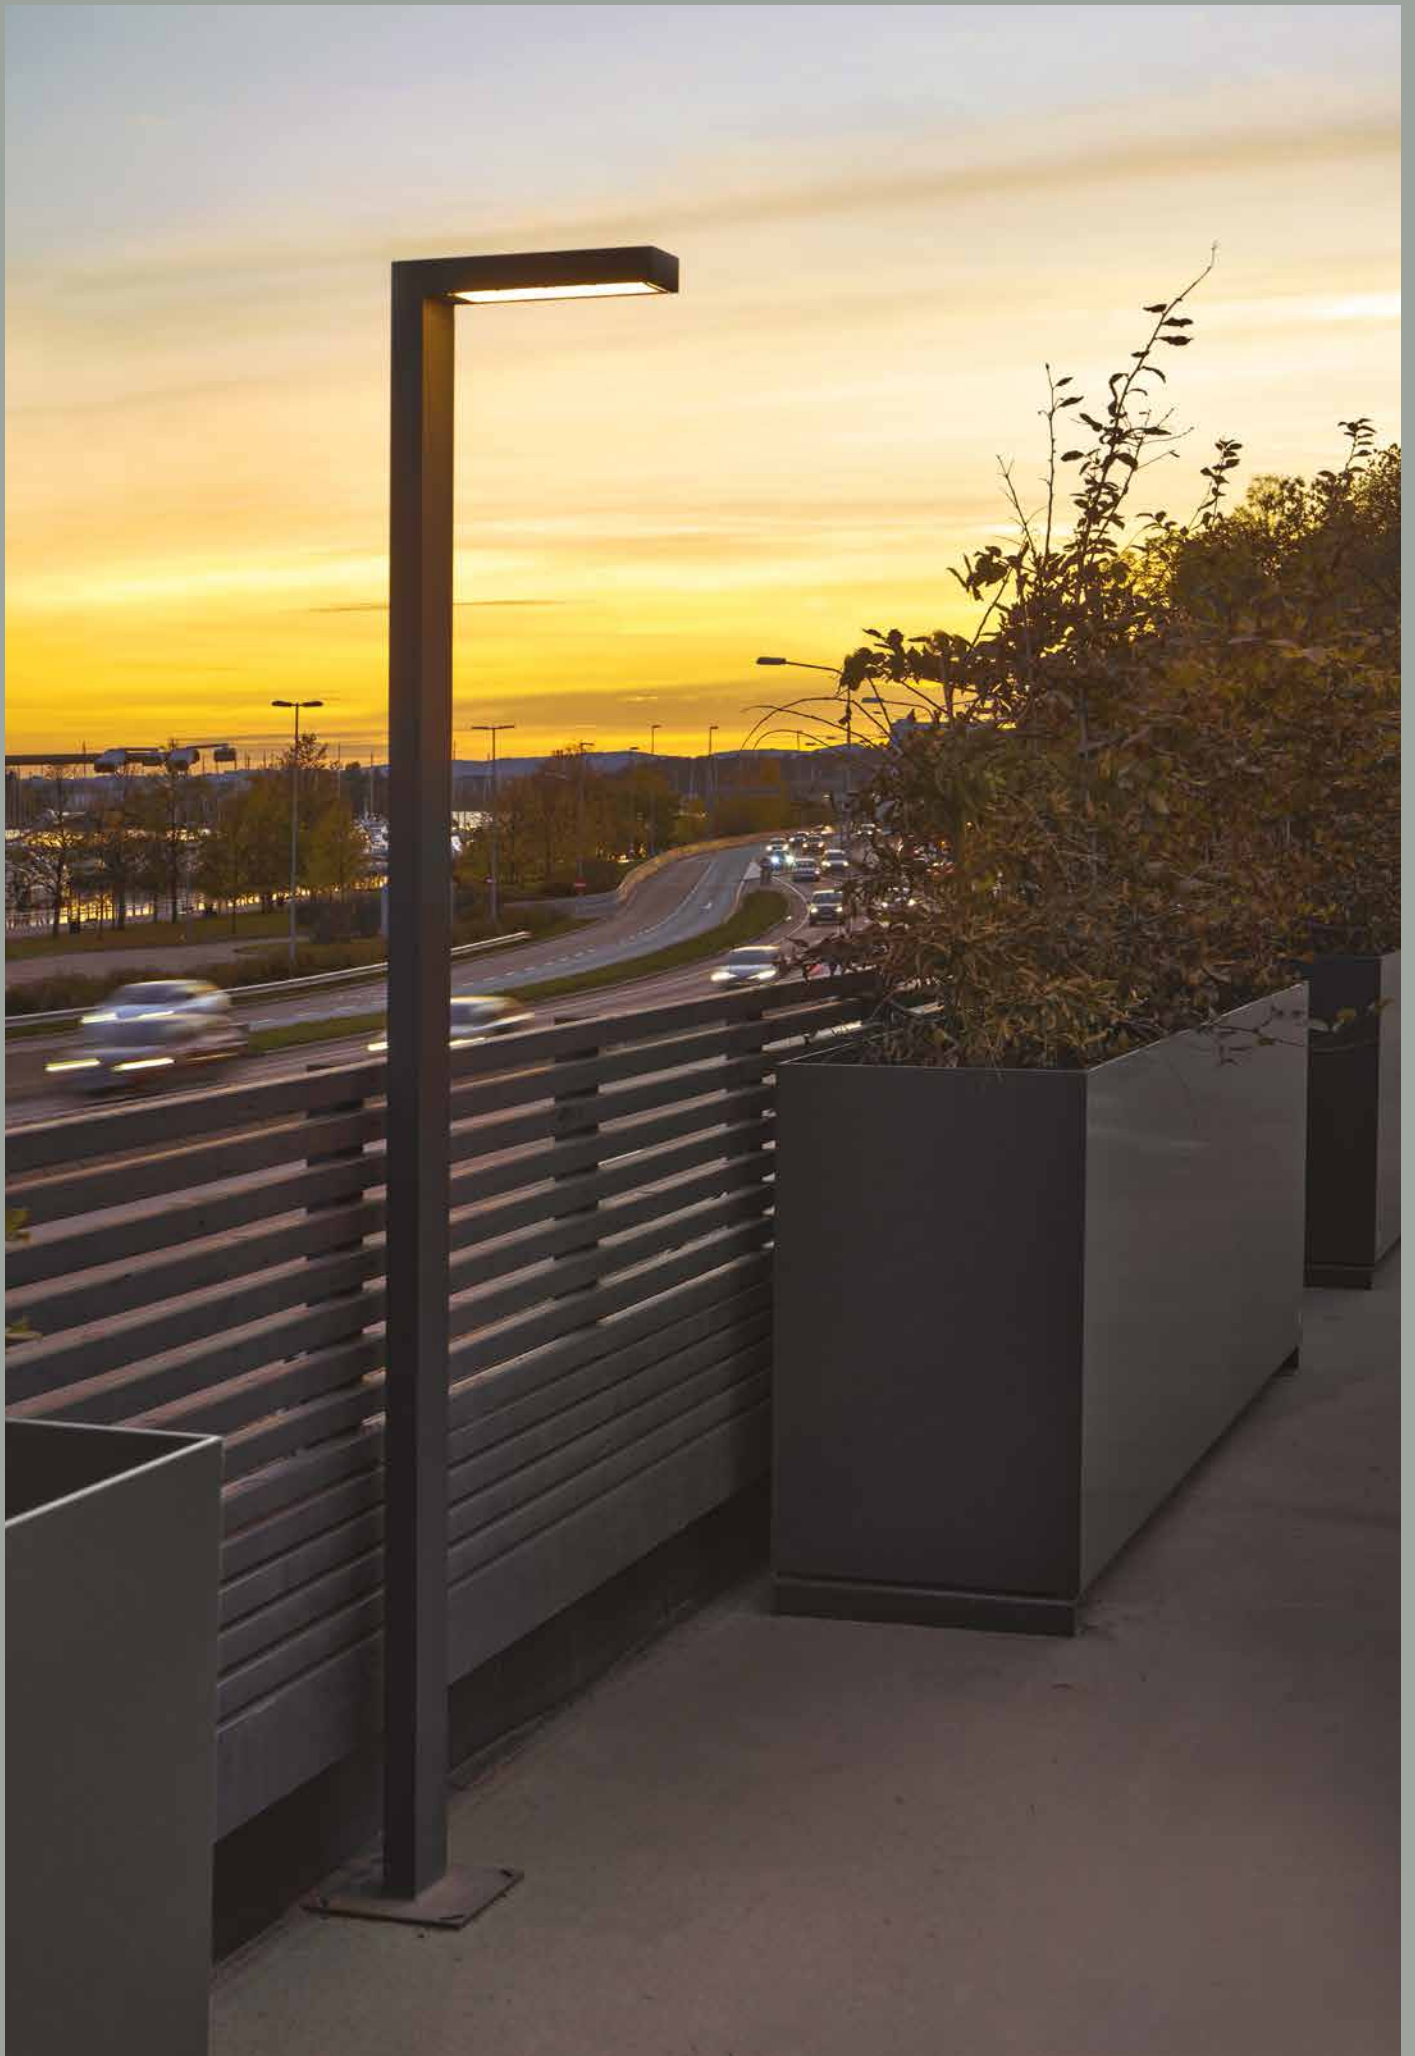

Asker Pole




Colour:

- Aluminium
- Black
- Graphite

Colour temperature:

- 2700K* 3000K 4000K
-
- *2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 116

Concreting anchor
For 2160 & 2360 height




Art. 117


Anchoring support
For 2160 & 2360 height.



Art. 3091


Concreting anchor



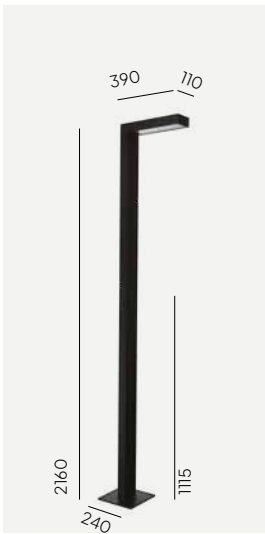



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1360AL	LED	12 W	1128lm	3000K	>72 000h	Dimmable	-
1360BL							
1360GR							
1361AL		8,4W	1081lm		>100 000h	DALI2 / NightDim	IESNA type V
1361BL							
1361GR							
1362AL		8,5W	1081lm		>120 000h	DALI2 / NightDim	IESNA type III
1362BL							
1362GR							
1366AL		8,4W	1018lm		>120 000h	-	IESNA type III
1366BL							
1366GR							
1368AL	8,7W	1018lm	>120 000h	DALI2 / NightDim	IESNA type III		
1368BL							
1368GR							

*All indexes also available in 4000K and 2700K versions.

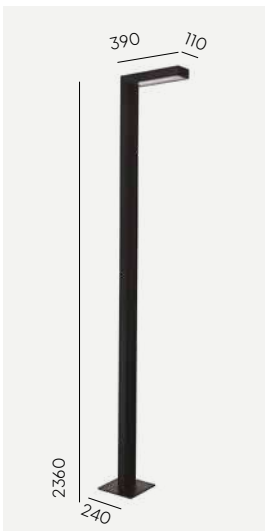


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1364AL	LED	8,4W	1033lm	3000K	>100 000h	-	IESNA type V
1364BL							
1364GR							
1365AL		8,5W	1085lm		>120 000h	DALI2 / NightDim	IESNA type III
1365BL							
1365GR							
1367AL		8,4W	1018lm		>120 000h	-	IESNA type III
1367BL							
1367GR							
1369AL		8,7W	1081lm		>120 000h	DALI2 / NightDim	IESNA type III
1369BL							
1369GR							

*All indexes also available in 4000K and 2700K versions.

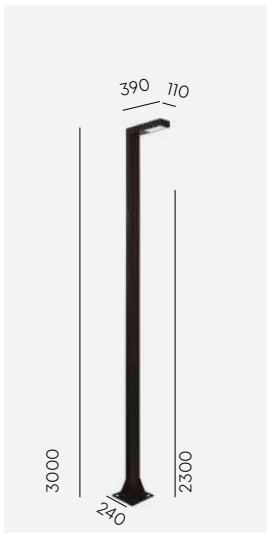

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
5222AL	LED	19,5W	2667lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V
5222BL							
5222GR							
5224AL			2660lm			Dimmable	
5224BL							
5224GR							
5226AL		2646lm	DALI2 / NightDim		IESNA type III		
5226BL							
5226GR							
5228AL		19,6W	2666lm			Dimmable	
5228BL							
5228GR							

*All indexes also available in 4000K and 2700K versions.

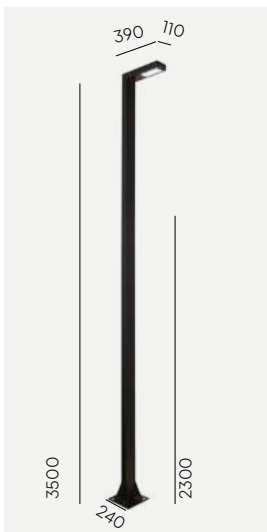

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IP	
5200AL	LED	19,9W	2620lm	3000K	> 120 000h	DALI2 / NightDim	IESNA type V	IP55/65	
5200BL									
5200GR									
5202AL		19,5W	2660lm		Dimmable	> 100 000h		Dimmable	IP65
5202BL									
5202GR									
5204AL		19,9W	2620lm		DALI2 / NightDim	IESNA type III	> 120 000h	DALI2 / NightDim	IP55/65
5204BL									
5204GR									
5206AL		19,6W	2666lm		Dimmable		> 100 000h	Dimmable	IP65
5206BL									
5206GR									

*All indexes also available in 4000K and 2700K versions.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
4322AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III	
4322BL								
4322GR								
4323AL			2742lm	4000K				IESNA type V
4323BL								
4323GR								
4362AL			2711lm	3000K			IESNA type V	
4362BL								
4362GR								
4363AL			2832lm	4000K				IESNA type V
4363BL								
4363GR								

*Other two mounting options Ø76mm and Ø50mm available on request



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
4332AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III	
4332BL								
4332GR								
4333AL			5723lm	4000K				IESNA type V
4333BL								
4333GR								
4372AL			5723lm	3000K			IESNA type V	
4372BL								
4372GR								
4373AL			6015lm	4000K				IESNA type V
4373BL								
4373GR								


*Other two mounting options Ø76mm and Ø50mm available on request



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
4342AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III	
4342BL								
4342GR								
4343AL			2742lm	4000K				IESNA type V
4343BL								
4343GR								
4382AL			2711lm	3000K			IESNA type V	
4382BL								
4382GR								
4383AL			2832lm	4000K				IESNA type V
4383BL								
4383GR								

*Other two mounting options Ø76mm and Ø50mm available on request

Asker Head

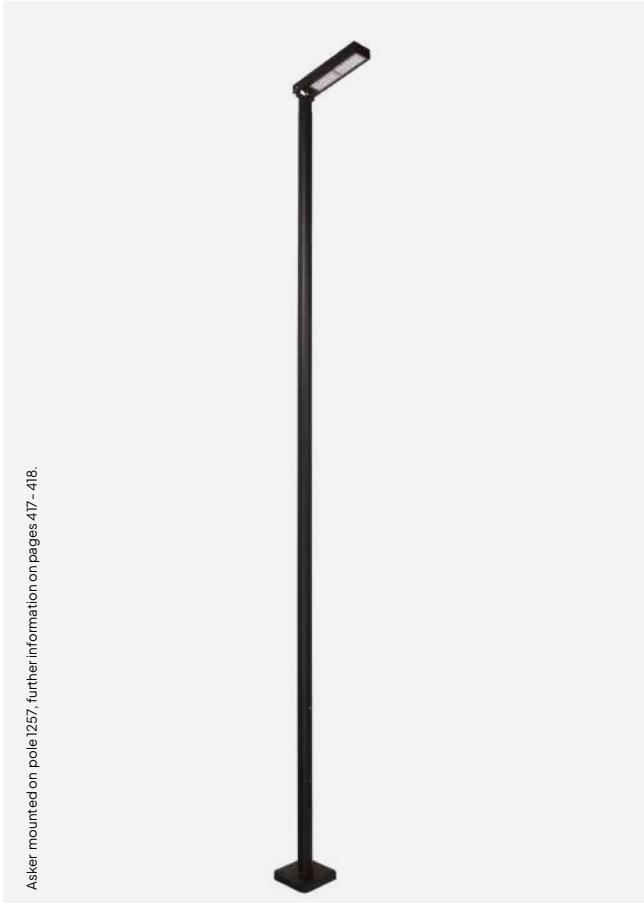

Asker mounted on pole 1257, further information on pages 417 - 418.

- CE
- 220-240V
- IP65
- IK10
- LED
- DALI
- Al
- PC
- 6m




Colour:

- Aluminium
- Black
- Graphite


Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Wide range of light direction adjustment.



Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4352AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2 / NightDim	IESNA type II/III
4352BL							
4352GR							
4353AL				4000K			
4353BL							
4353GR							
4392AL			5723lm	3000K			IESNA type V
4392BL							
4392GR							
4393AL				4000K			
4393BL							
4393GR							

*Other two mounting options Ø76mm and Ø50mm available on request




Alta

Gardens and terraces are often extension of domestic spaces which require illumination. Oases of greenery and places of respite after daily chores require the right setting. This is where we spend time with family and friends, indulge in garden hobbies or celebrate moments of peace and quiet in solitude. It is worth emphasizing the qualities of our favourite places with gentle light. The Alta lamps, a subtle combination of wood and steel, are perfect for the garden and terrace. The interesting solution of light diffusion gives the desired effect of a sense of calm and harmony. A garden subtly illuminated by Alta luminaires is a tested way to truly relax.





Alta

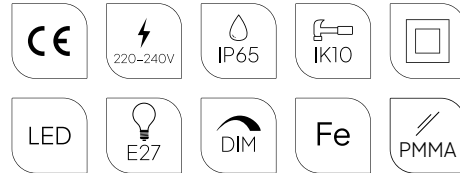

Colour:


- Black
- Galvanized

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
291BL	E27	-	-	-	-	-
291GA						
1475BL	LED E27	5,9W	100lm	2700K	25 000h	Dimmable
1475GA						
1479BL	LED	8,5W	146lm	3000K	> 50 000h	
1479GA			151lm	4000K		
5021BL						
5021GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
293BL	E27	-	-	-	-	-
293GA						
1477BL	LED E27	5,9W	100lm	2700K	25 000h	Dimmable
1477GA						
1476BL	LED	8,5 W	146lm	3000K	>50 000h	
1476GA			151lm	4000K		
1468BL						
1468GA						

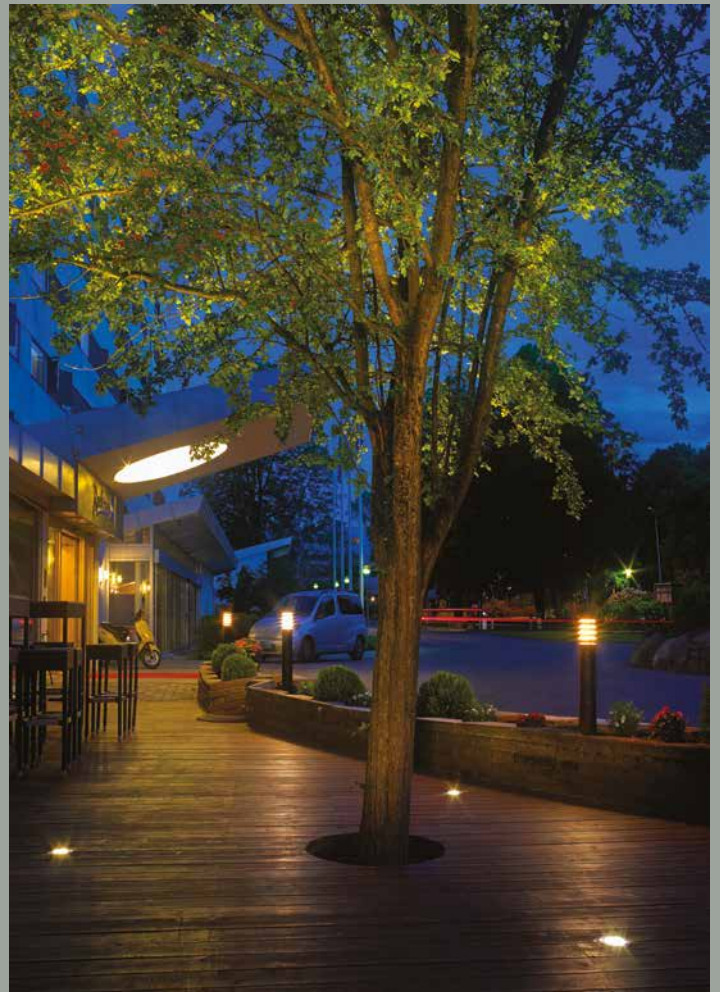



Alta

scandinavian wood



- CE
- 220-240V
- IP65
- IK10
- DIM
- E27
- LED
- Fe
- PMMA



Colour:

- Black
- Galvanized

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.




Luminaire housing made of natural wood.




Product Eco-friendly.

Accessories:

Art. 205
Concreting anchor



Art. 206
Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1440BL	E27	-	-	-	-	-
1440GA						
1665BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1665GA			151lm	4000K		
1666BL						
1666GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1450BL	E27	-	-	-	-	-
1450GA						
1669BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1669GA			151lm	4000K		
1670BL						
1670GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1443BL	E27	-	-	-	-	-
1443GA						
1673BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1673GA			151lm	4000K		
1674BL						
1674GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1453BL	E27	-	-	-	-	-
1453GA						
1677BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1677GA			151lm	4000K		
1678BL						
1678GA						

Borg


The Borg luminaires family is a prime example of top quality and modern design. Borg will prove ideal for designing modern solutions to enhance urban living comfort. The Borg will be a great complement to leisurely, plant-filled squares with benches, but it will also fit in well with the landscape of an ordinary street and completely change its look. For many people, the city is a place to work and live. Therefore, designing comfortable urban landscapes requires the right eye-catching lighting. The minimalist and functional Borg will bring a modern style to any urban space.



Photo: panoramahyttene.no



Borg

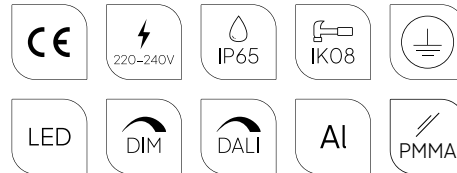


Colour:

- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 202


Anchoring support




Art. 203

Concreting anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6190AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6190GR			1396lm	4000K		
6191AL		17,6W	1358lm	3000K		DALI2/ NightDim
6191GR			1396lm	4000K		
6192AL	LED	17,6W	1358lm	3000K	> 72 000h	DALI2/ NightDim
6192GR			1396lm	4000K		
6193AL			1358lm	3000K		
6193GR	1396lm	4000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6180AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6180GR			1396lm	4000K		
6181AL		15,9W	1396lm	4000K		DALI2/ NightDim
6181GR			1358lm	3000K		
6183AL	LED	17,6W	1358lm	3000K	> 72 000h	DALI2/ NightDim
6183GR			1396lm	4000K		
6182AL			1358lm	3000K		
6182GR	1396lm	4000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6170AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6170GR				4000K		
6171AL			1396lm	4000K		
6171GR						
6173AL		17,6W	1396lm	4000K		DALI2 / NightDim
6173GR						
6172AL			1358lm	3000K		
6172GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6120AL	LED	16,1W	1358lm	3000K	> 72 000h	Dimmable
6120GR				4000K		
6121AL		16W	1396lm	4000K		
6121GR						
6123AL		17,2W	1396lm	4000K		DALI2
6123GR						
6122AL			1358lm	3000K		
6122GR						



Borg



Borg mounted on pole 3004, details on pages 417-418.

CE	220-240V	IP65	IK08	⏚	6m
LED	DALI	Al	PC	60	




- Colour:**
- Aluminium
 - Graphite

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.


Art. 7660

Adapter Ø60 for install on pole Ø76



Art. 154

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6150AL	LED	32W	3735lm	3000K	> 72 000h	-	
6150GR				4000K			
5140AL			3928lm	4000K			
5140GR			3735lm	3000K			
5141AL		32,6W	3970lm	4000K		> 72 000h	DALI2/ NightDim
5141GR				3000K			
5142AL			3970lm	4000K			
5142GR			3970lm	4000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens Control	
6151AL	LED	32W	2996lm	3000K	> 72 000h	-	
6151GR				4000K			
5145AL			3069lm	4000K			
5145GR			2953lm	3000K			
5146AL		32,6	3194lm	4000K		> 72 000h	DALI2/ NightDim
5146GR				3194lm			
5147AL			3194lm	4000K			
5147GR			3194lm	4000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6153AL	LED	53W	6900lm	3000K	> 72 000h	DALI2/Night-Dim	
6153GR						D4i	
6154AL			7200lm	4000K		> 100 000h	DALI2/Night-Dim
6154GR						> 72 000h	D4i
6155AL		7200lm		4000K	> 100 000h	DALI2/Night-Dim	
6155GR					> 72 000h	D4i	
6156AL		7200lm	4000K	> 100 000h	DALI2/Night-Dim		
6156GR				> 72 000h	D4i		


Bornholm

Minimalist design, classic shape. In a word, the captivating simplicity and versatility of this lamp, which offers the possibility of many applications. The Bornholm luminaire is durable and long-lasting, and although it is dedicated to external walls, it is just as suitable for a variety of uses indoors. It can be used as a ceiling or wall light. The milky shade minimizes glare, gives evenly spread light and provides comfort to the eye. The Bornholm will be the perfect piece to bring a warm accent to this type of modern interior. It looks great on raw concrete, but will actually be a good complement to any façade or wall.





Bornholm

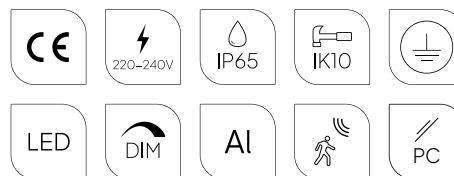


Colour:

- Aluminium
- White
- Graphite

Colour temperature:

- 2700K*
 - 3000K
 - 4000K
- *2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
541AL	LED	7,8W	428lm	3000K	>50 000h	Dimmable			
541GR									
541WH									
5121AL			443lm	4000K					
5121GR									
5121WH									
544AL	LED	10W	417lm	3000K	50 000h	Motion Detector			
544GR									
544WH									
545AL									
545GR	10,5W	464lm	4000K	-	-	-			
545WH									
542AL							17,5W	794lm	3000K
542GR									
542WH									
5122AL								836lm	4000K
5122GR									
5122WH									

Bornholm can be mounted as a ceiling fixture!



Egersund Mini

Energy efficiency, functionality and aesthetics. This rare combination has been achieved in this particular lamp. Innovation happens when it brings economic benefit.

Undoubtedly innovative product providing efficiency, durability and low energy consumption thanks to the state-of-the-art LED technology fitted to these luminaires.

Durable materials enclosed in a minimalist form and an original reflector in the shape of a metallized cone have given the lamp a completely unique appearance. It will be perfect for gardens, driveways and paths and will be a decoration for both traditional and modern homes.







Egersund Mini




Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 205


Concreting anchor





Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1290AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable
1290GR				4000K		
5117AL			917lm	DALI		
5117GR			864lm			
2302AL		864lm				
2302GR		3000K				
2303AL		9,6W	934lm	4000K		
2303GR						

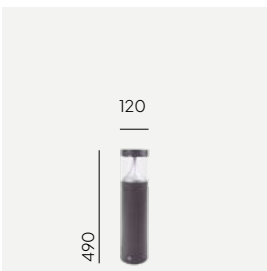


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1291AL	LED	9,1W	864lm	3000K	> 72 000h	Dimmable
1291GR				4000K		
5118AL			917lm	DALI		
5118GR			864lm			
2314AL			864lm			
2314GR			3000K			
2315AL			915lm	4000K		
2315GR						







Egersund Mini

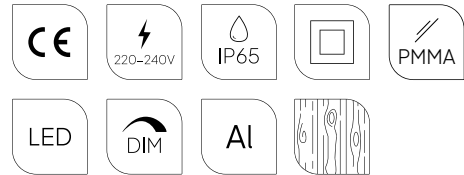

scandinavian wood



Colour:

-  Aluminium
-  Graphite

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2304AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2304GR						
2305AL			873lm	4000K		
2305GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2308AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2308GR						
2309AL			873lm	4000K		
2309GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2316AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2316GR						
2317AL			873lm	4000K		
2317GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2320AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2320GR						
2321AL			873lm	4000K		
2321GR						

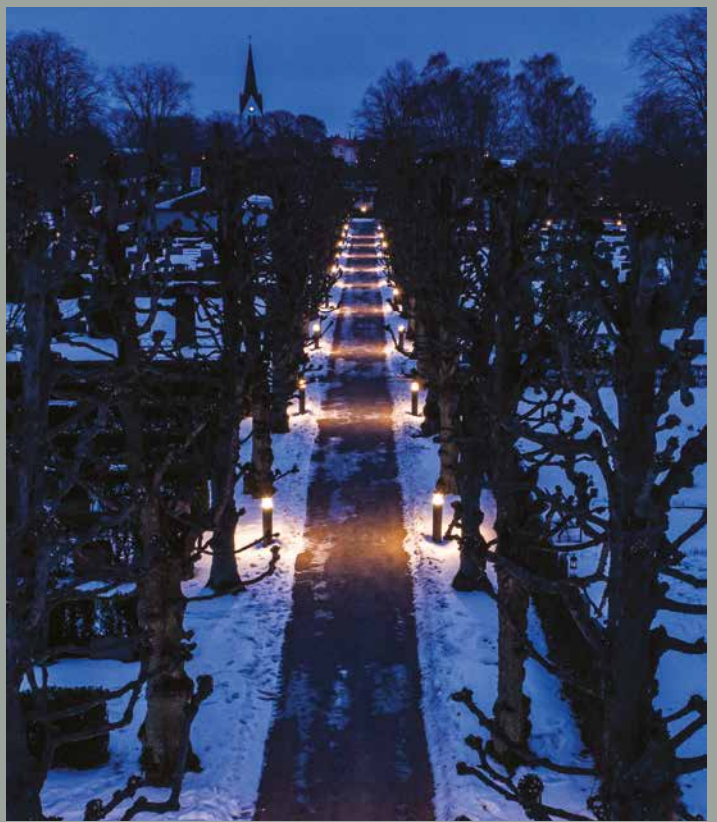



Egersund

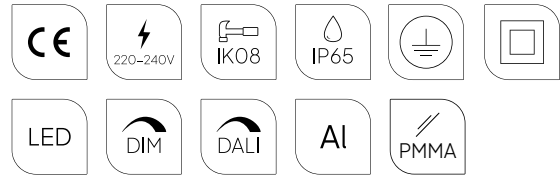

Colour:


- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K

○
○
○

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:

Art. 1230
Concreting anchor



Art. 1231
Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1280AL	LED	20,3W	1681lm	3000K	> 162 000h	Dimmable	II
1280GR							
5068AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5068GR							
5014AL		20,3W	1782lm	4000K		Dimmable	II
5014GR							
5066AL		22W	1782lm	4000K		DALI2 / NightDim	I
5066GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1285AL	LED	22W	1586lm	3000K	> 162 000h	Dimmable	II
1285GR							
5069AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5069GR							
5067AL		1782lm	4000K	4000K		DALI2 / NightDim	I
5067GR							
5015AL		22W	1782lm	4000K		Dimmable	II
5015GR							

Egersund Park

The world takes on different and better colours in the right light. And if, in addition, the light source is stylish, durable and energy-efficient, then we have a complete success. The luminaires from the Egersund Park family are not only intended for park settings and urban greenery. The versatility of the lamps and the possibility of a variety of applications has already been appreciated by many designers. The lightweight construction, simple shape and warm light, radically changes the perception of the space.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6080AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6080GR							
6081AL			935lm	4000K			
6081GR							
6082AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6082GR							
6083AL			2319lm	4000K			
6083GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6090AL	LED	9,1W	907lm	3000K	> 102 000h	Dimmable	II
6090GR							
6091AL			935lm	4000K			
6091GR							
6092AL		23,9W	2258lm	3000K	> 102 000h	DALI2 / NightDim	I
6092GR							
6093AL			2319lm	4000K			
6093GR							

Egersund Park

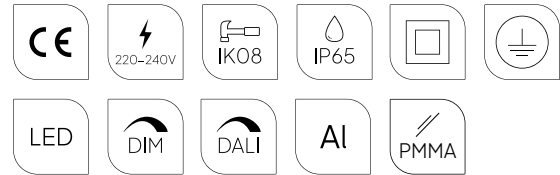


Colour:

- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Egersund Park




Colour:

- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

Accessories:


Art. 6130

Concreting anchor




Art. 6132

Anchoring support 490mm



Art. 6135

Electric box



for Art. 6105, 6107, 6113, 6115



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6105AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6105GR			962lm	4000K			
6107AL							
6107GR							
6113AL		23,7W	2239lm	3000K	> 72 000h	DALI2	I
6113GR							
6115AL		23,9W	2314lm	4000K	> 72 000h	DALI2	I
6115GR							
6117AL		10W	959lm	3000K	>50 000h	Dimmable	II
6117GR							
6118AL			1064lm	4000K			
6118GR							




Geneva

Geneva is a fashionable type of lamp, and is popular with designers and individual investors alike. The hallmark of the Geneva wall lamp is the light emitted in two directions.


Using an innovative plane lighting system, the glare effect has been eliminated.

The Geneva lamp is a luminaire with a wide range of applications. It is ideal for illuminating pillars and large wall areas, especially on public buildings. Geneva can also certainly transform the shape of a single-family house, not only with a modern character.

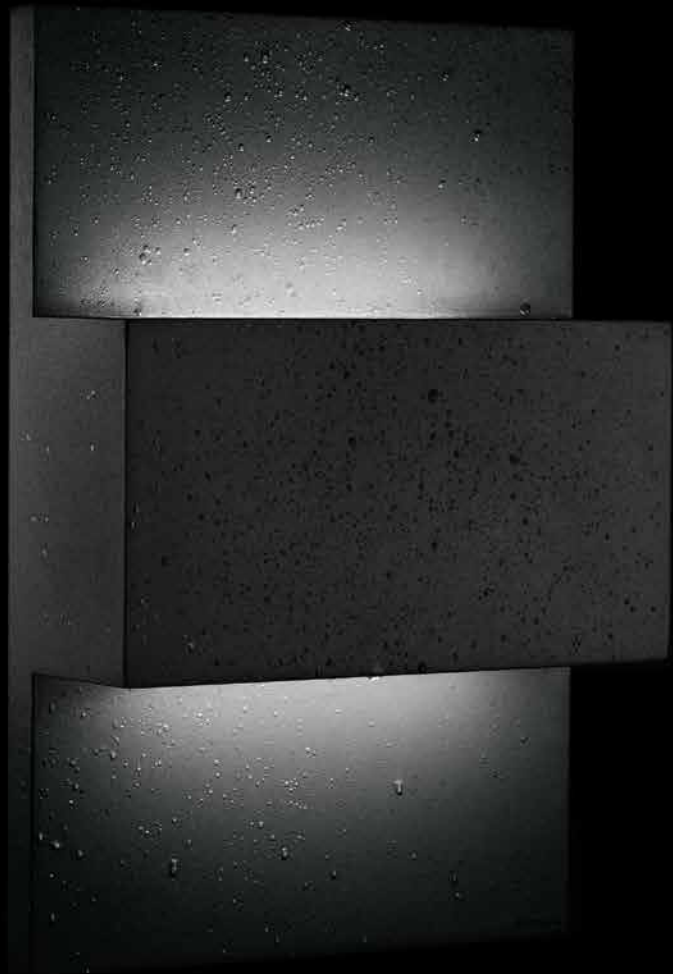



Geneva

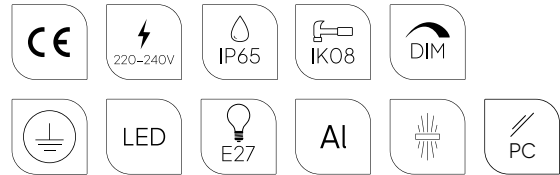


Colour:

- Aluminium
- White
- Graphite

Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1874AL	E27	-	-	-	-	-
1874GR		-	-	-	-	-
1874WH		-	-	-	-	-
1879AL	LED	8,3W	609lm	3000K	> 72 000h	Dimmable
1879GR						
1879WH						
1880AL		8,4W	656lm	4000K		
1880GR						
1880WH						

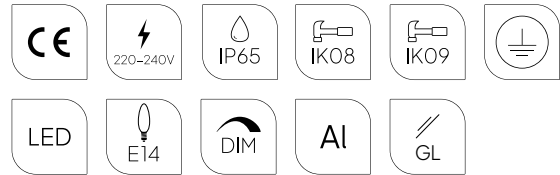

Grimstad



Colour:


-  Aluminium
-  Graphite

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1545AL	LED	8,3W	67lm	3000K	> 100 000h	Dimmable
1545GR						
5025AL		7,4W	72lm	4000K		
5025GR						
1547AL	E14	-	-	-	-	-
1547GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1544AL	LED	5,3W	214lm	3000K	70 000h	Dimmable
1544GR						
1546AL	E14	-	-	-	-	-
1546GR						



Glode

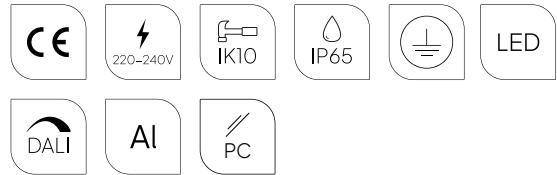

Colour:


- Aluminium
- Graphite
- Black

Colour temperature:

- 2700K* 3000K 4000K
-
- *2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 112

Concreting anchor



Art. 113

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1262AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1262BL							
1262GR							
1261AL							
1261BL							
1261GR							
1281AL		54W	7320lm	3000K		-	
1281BL							
1281GR							
1282AL							
1282BL							
1282GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1264AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1264BL							
1264GR							
1263AL							
1263BL							
1263GR							
1283AL		54W	7320lm	3000K		-	
1283BL							
1283GR							
1284AL							
1284BL							
1284GR							


Halmstad

Thanks to Halmstad luminaires, garden spaces will acquire a unique charm. The bollard made of natural wood and steel works well with shrubs, perennials, stones and, above all, with the wooden architecture of the garden such as arbours, benches, trellises for climbing plants. Lamps in the garden are exposed to snow, sun, frost and moisture. They will serve for as long as possible heavily exposed to the test of time and weather. The elegant design with modern LED technology and the different sizes make it simply worth applying in the garden. The trees will grow larger, the plants will create a life-giving retreat and the reliable Halmstad luminaires will continue to enhance the beauty of the garden.





Halmstad

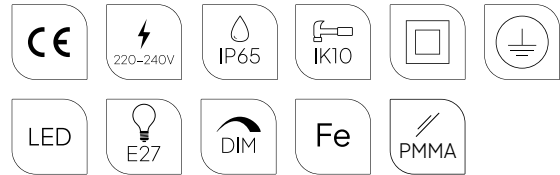

Colour:


- Black
- Graphite
- Galvanized

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor




Art. 206

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
296BL	E27	-	-	-	-	-
296GA						
296GR						
1483BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable
1483GA						
1483GR						
1482BL	LED	8,5W	292lm	3000K	> 50 000h	
1482GA						
1482GR						
5022BL			310lm	4000K		
5022GA						
5022GR						

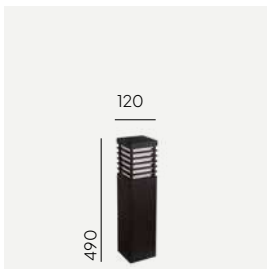

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
295BL	E27	-	-	-	-	-
295GA						
295GR						
1488BL	LED E27	5,9W	252lm	2700K	25 000h	Dimmable
1488GA						
1488GR						
1489BL	LED	8,5W	292lm	3000K	> 50 000h	
1489GA						
1489GR						
1346BL			310lm	4000K		
1346GA						
1346GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
210BL	E27	-	-	-	-	-	II
210GA							
210GR							
212BL	LED E27	5,9W	-	2700K	25 000h	Dimmable	
212GA							
212GR							
211BL	LED	10,5W	295lm	3000K	> 50 000h	-	I
211GA							
211GR							





Halmstad

scandinavian wood



- CE
- 220-240V
- IP65
- IK10
- LED
- E27
- DIM
- Al
- Fe
- PMMA



Colour:

- Black
- Galvanized
- Graphite

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1410BL	E27	-	-	-	-	-
1410GA						
1410GR						
1356BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1356GA				3000K		
1356GR			3000K			
1419BL			292lm	3000K		
1419GA			292lm	3000K		
1419GR	292lm	3000K				




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1400BL	E27	-	-	-	-	-
1400GA						
1400GR						
1353BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1353GA				3000K		
1353GR			3000K			
1409BL			292lm	3000K		
1409GA			292lm	3000K		
1409GR	292lm	3000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1413BL	E27	-	-	-	-	-
1413GA						
1413GR						
1350BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1350GA				3000K		
1350GR			3000K			
1417BL			292lm	3000K		
1417GA			292lm	3000K		
1417GR	292lm	3000K				

Bollard

Modern



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1403BL	E27	-	-	-	-	-
1403GA						
1403GR						
1347BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1347GA						
1347GR						
1407BL			292lm	3000K		
1407GA						
1407GR						






Halden




Colour:

- Aluminium
- White
- Graphite

Colour temperature:



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
510AL	E27	-	-	-	-	-
510GR		-	-	-	-	-
510WH		-	-	-	-	-
515AL	LED E27	5,9W	175lm	2700K	25000h	Dimmable
515GR						
515WH						
5096AL	LED	8,4W	662lm	3000K	> 110 000h	DALI2
5096GR						
5096WH						
517AL	LED	8,5W	682lm	4000K	> 110 000h	Dimmable
517GR						
517WH						
5020AL	LED	8,5W	690lm	4000K	> 110 000h	Dimmable
5020GR						
5020WH						
5097AL	LED	8,8W	696lm	4000K	> 110 000h	DALI2
5097GR						
5097WH						




Hellvik

The original bollard luminaire in a fashionable geometric shape will bring an aura of modernity to any private or public space. The Hellvik lamp is hard to pass by indifferently. Available in several sizes, this bollard offers a range of state-of-the-art light sources and controls to suit the most demanding users. Hellvik is the perfect choice for those who want to combine modernity with reliability and exceptional style. This lamp is a frequent choice of designers. The unusual design will work well in a wide variety of settings. Hellvik likes to play a leading role in the space. It likes to attract attention.

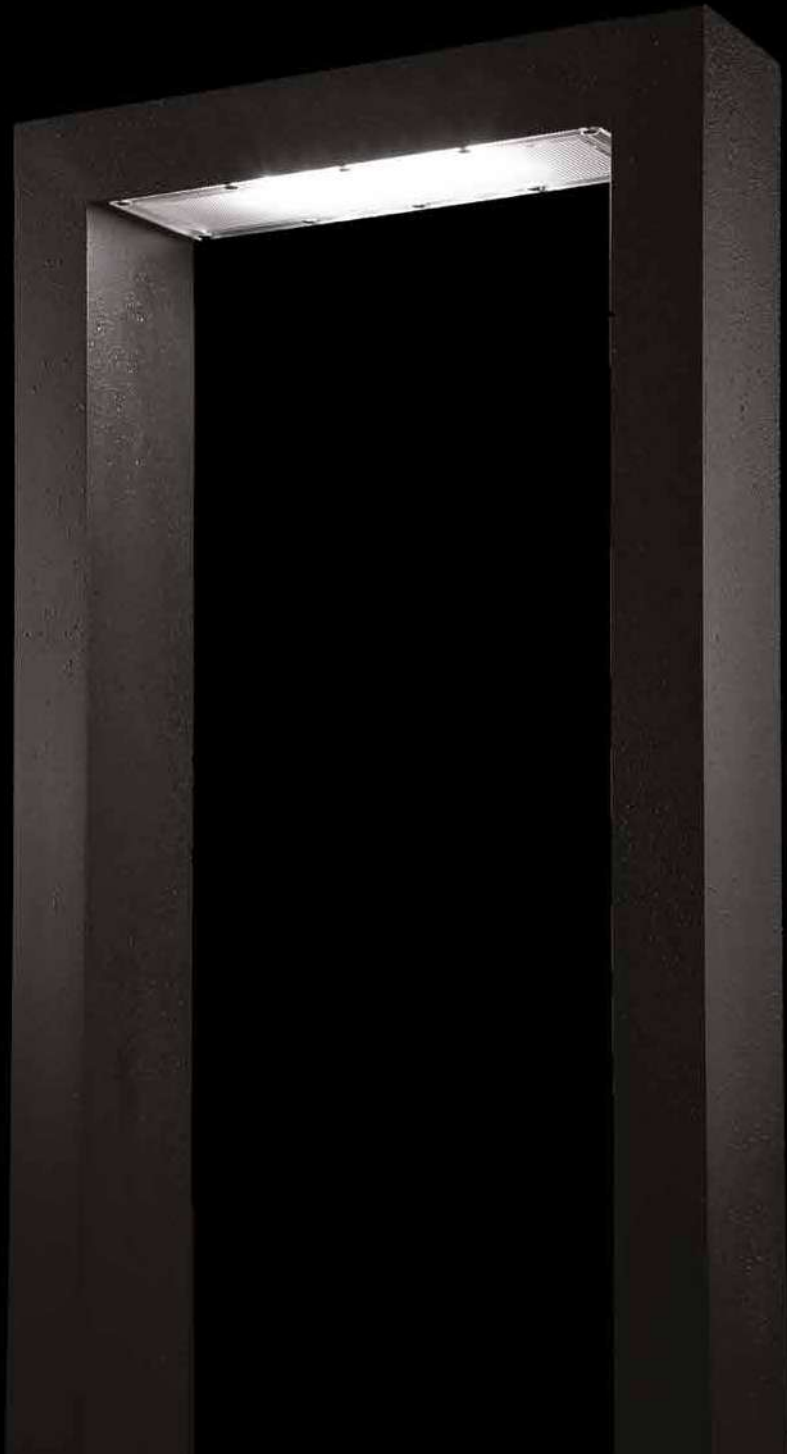

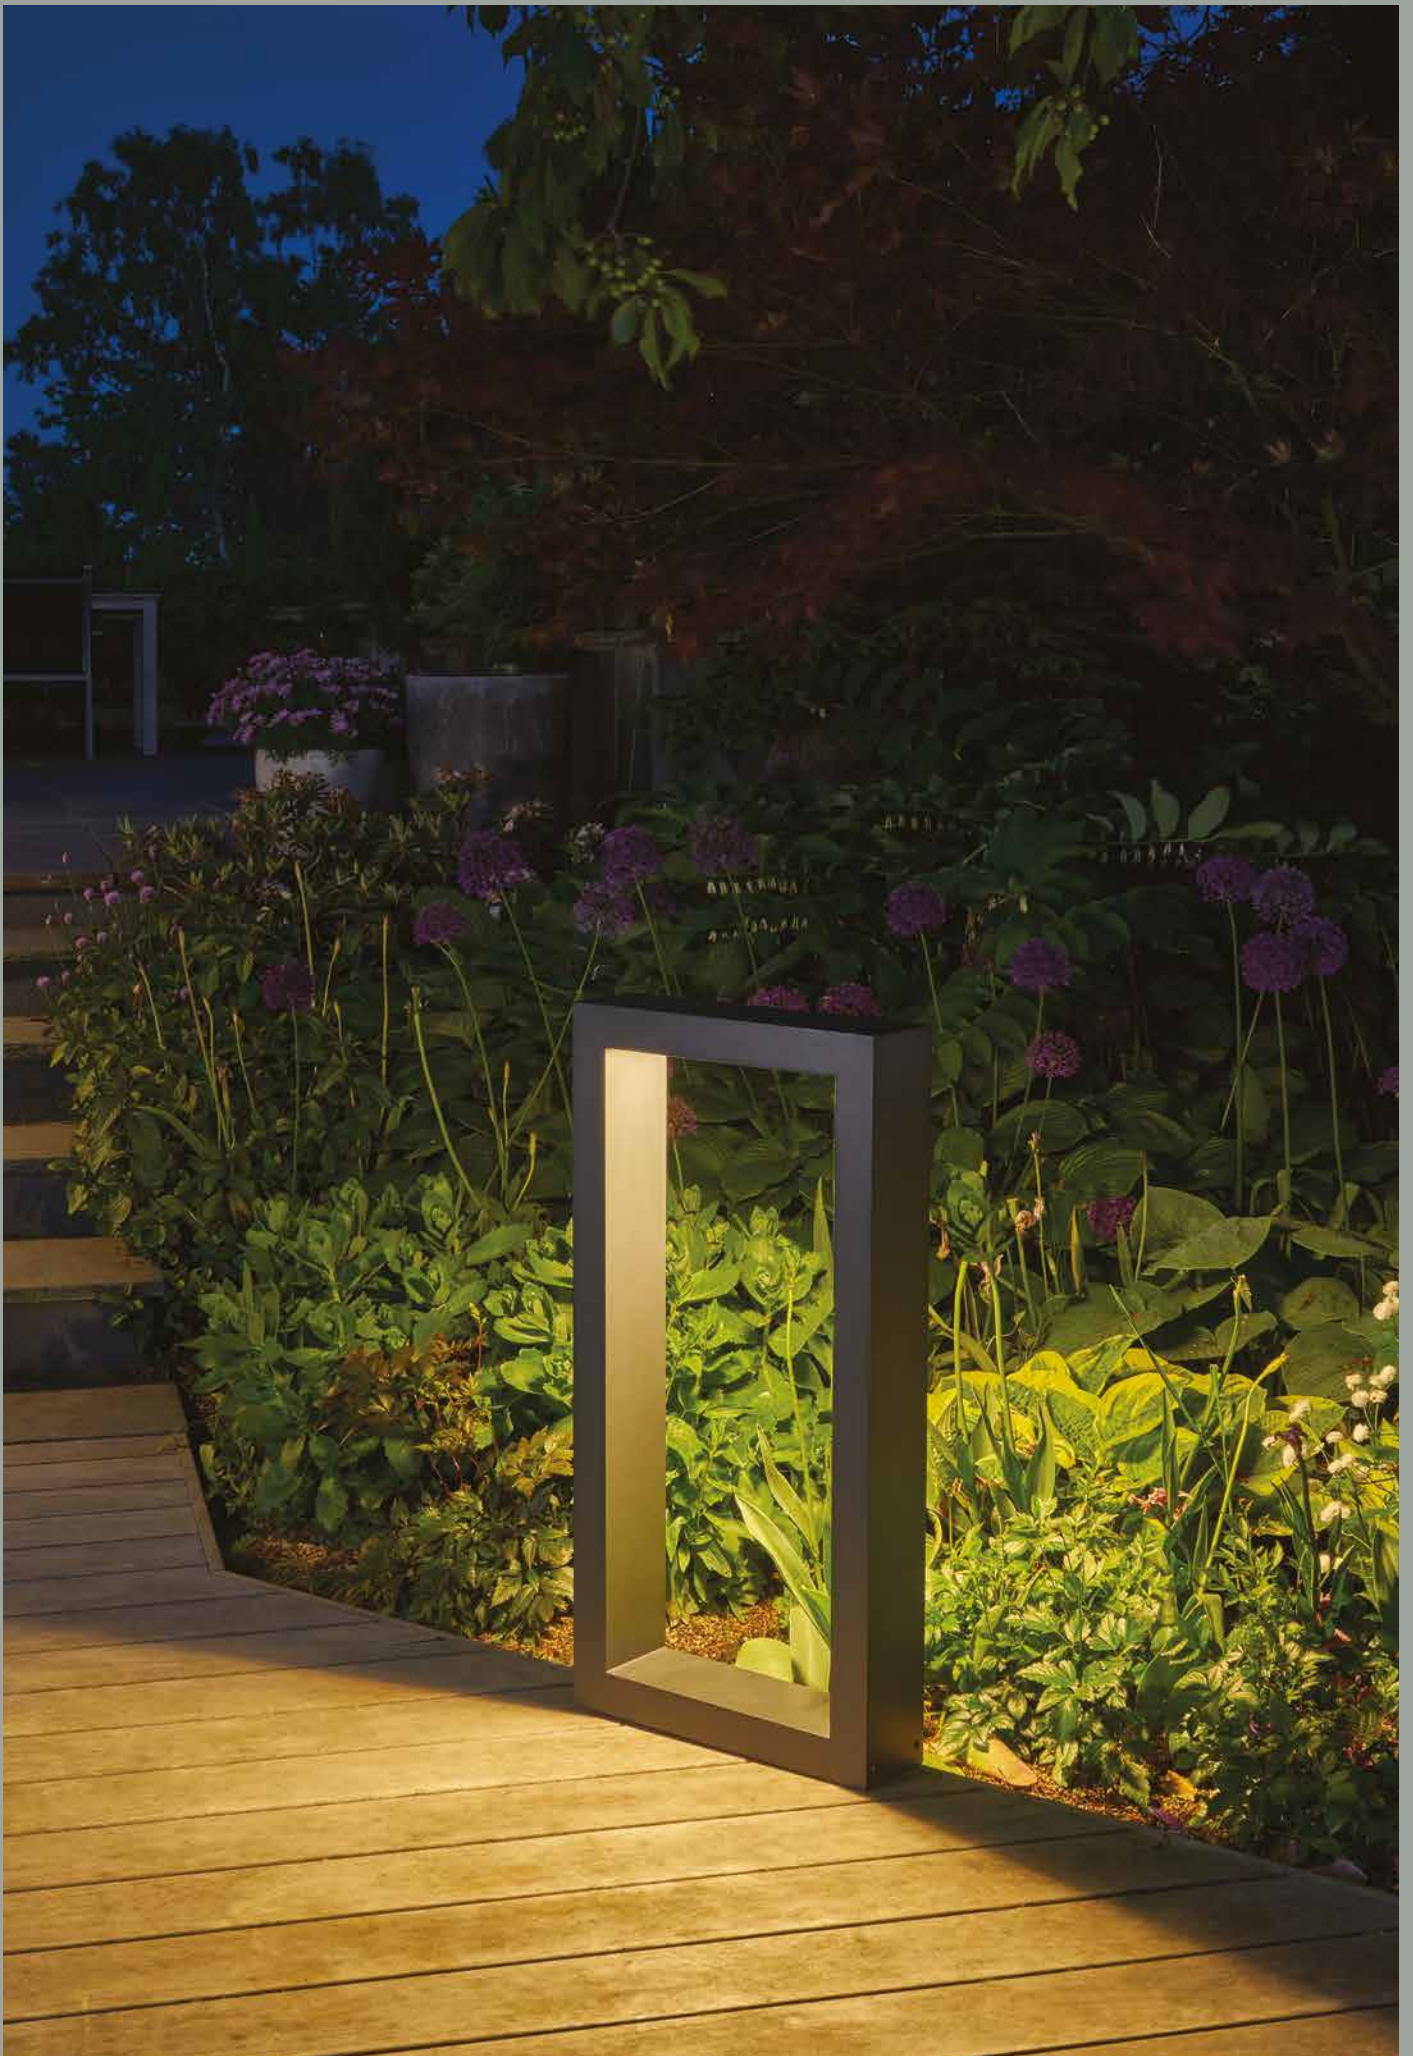

Hellvik

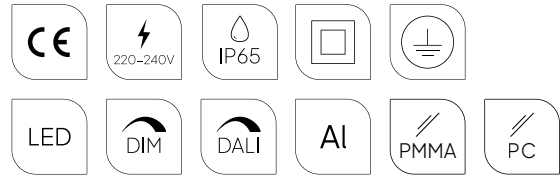

Colour:

- Aluminium
- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 209

Concreting anchor



Art. 2409

Anchoring support
(2 pcs needed)






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class			
2410AL	LED	11,8W	1014lm	3000K	> 72 000h	Dimmable	II			
2410BL										
2410GR			1072lm	4000K						
2411AL										
2411BL										
2411GR										
2412AL		20,2W	1747lm	3000K	> 100 000h	DALI2	I			
2412BL										
2412GR			1803lm	4000K						
2413AL										
2413BL										
2413GR										
2414AL		8W	1038lm	3000K	> 100 000h	Dimmable	II			
2414BL										
2414GR										
2415AL		8,1W	1007lm	4000K				> 100 000h	DALI2	I
2415BL										
2415GR										
2416AL		11,9W	1537lm	3000K	> 100 000h	DALI2	I			
2416BL										
2416GR			1466lm	4000K						
2417AL										
2417BL										
2417GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class			
2400AL	LED	6,9W	531lm	3000K	> 72.000h	Dimmable	II			
2400BL				4000K						
2400GR			575lm	4000K						
2401AL										
2401BL										
2401GR										
2402AL		10,1W	670lm	3000K	> 72.000h	DALI2	I			
2402BL				4000K						
2402GR			808lm	4000K						
2403AL										
2403BL										
2403GR										
2404AL		8W	1038lm	3000K	> 100.000h	Dimmable	II			
2404BL										
2404GR										
2405AL		8,1W	1007lm	4000K				> 100.000h	DALI2	I
2405BL										
2405GR										
2406AL		11,9W	1537lm	3000K	> 100.000h	DALI2	I			
2406BL				4000K						
2406GR			1549lm	4000K						
2407AL										
2407BL										
2407GR										

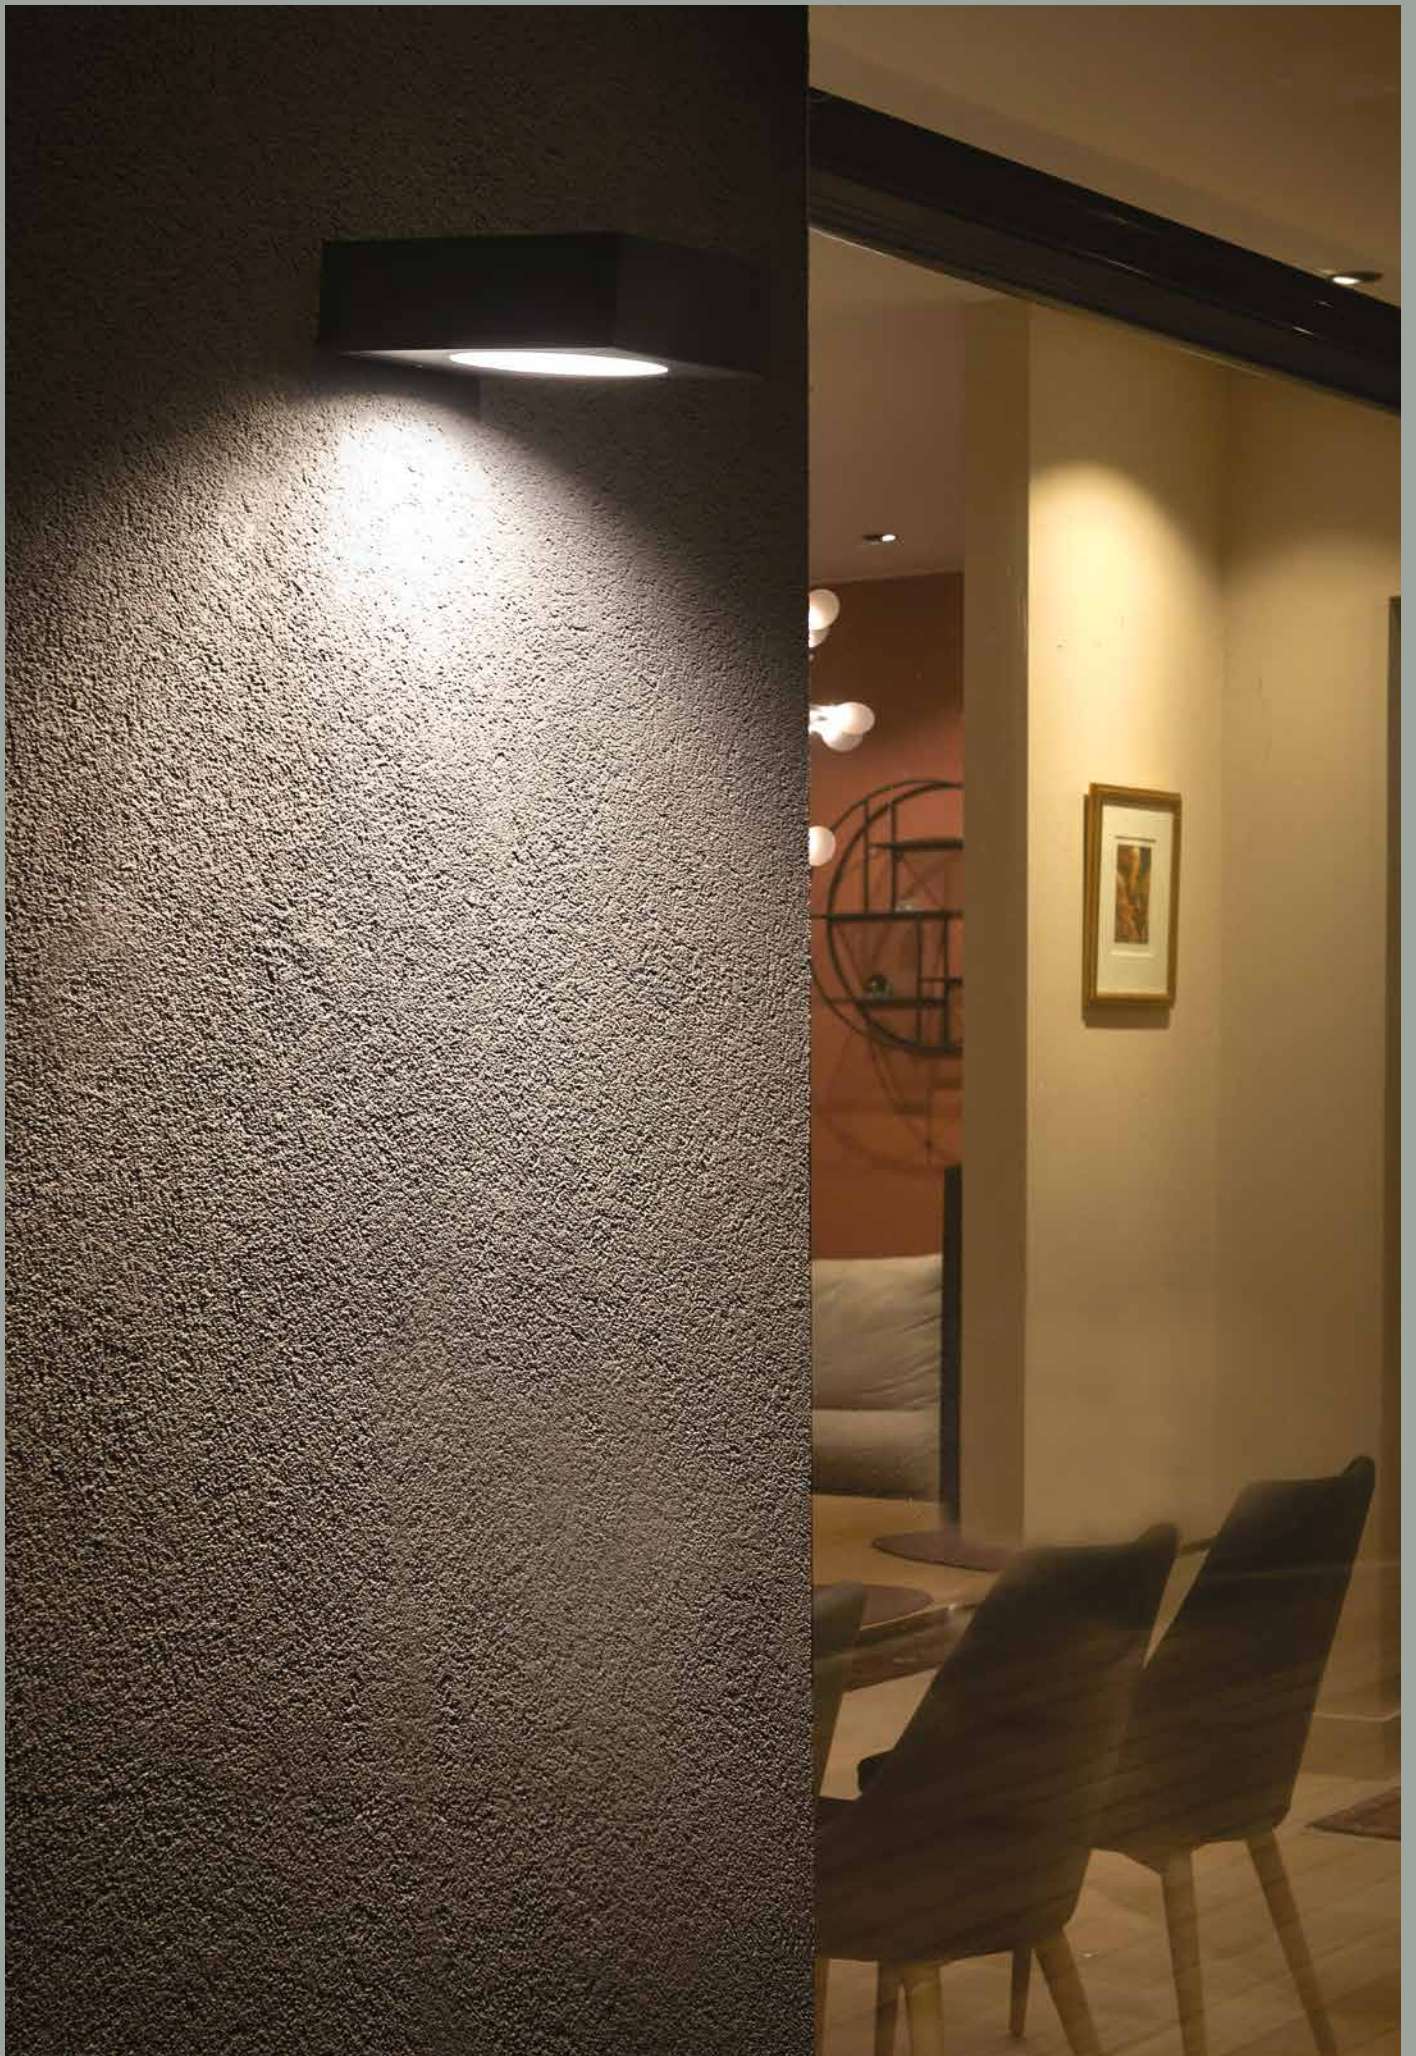

Hitra



Colour:

- Aluminium
- White
- Graphite


Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Product Eco-friendly.

Accessories:

Art. 151

Corner bracket tilt 15//30/45 °



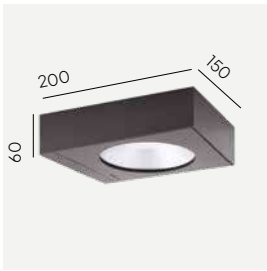


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
1330AL	LED	9,5W	920lm	3000K	50 000
1330GR					
1330WH					
5114AL			979lm	4000K	
5114GR					
5114WH					
1331AL		17,5W	1599lm	3000K	
1331GR					
1331WH					
5115AL			1717lm	4000K	
5115GR					
5115WH					



Hammerfest

A city vibrant with life, yet safe and comfortable is the perfect place for the Hammerfest pole. It refers in style to the classics, but is ultimately thoroughly modern after all. Hammerfest is a modern pole elegant by its minimalism. Thanks to its specially designed luminaire, the lamp has the advantage of illuminating a large area with a harmonious beam of light. Designers of urban spaces have the choice of a satin or milk glass diffuser, with which the urban evening space of streets, parks, promenades and squares can be balanced perfectly. Good lighting does not compete with architecture in the city. The task of successful illumination is to highlight its most significant qualities.



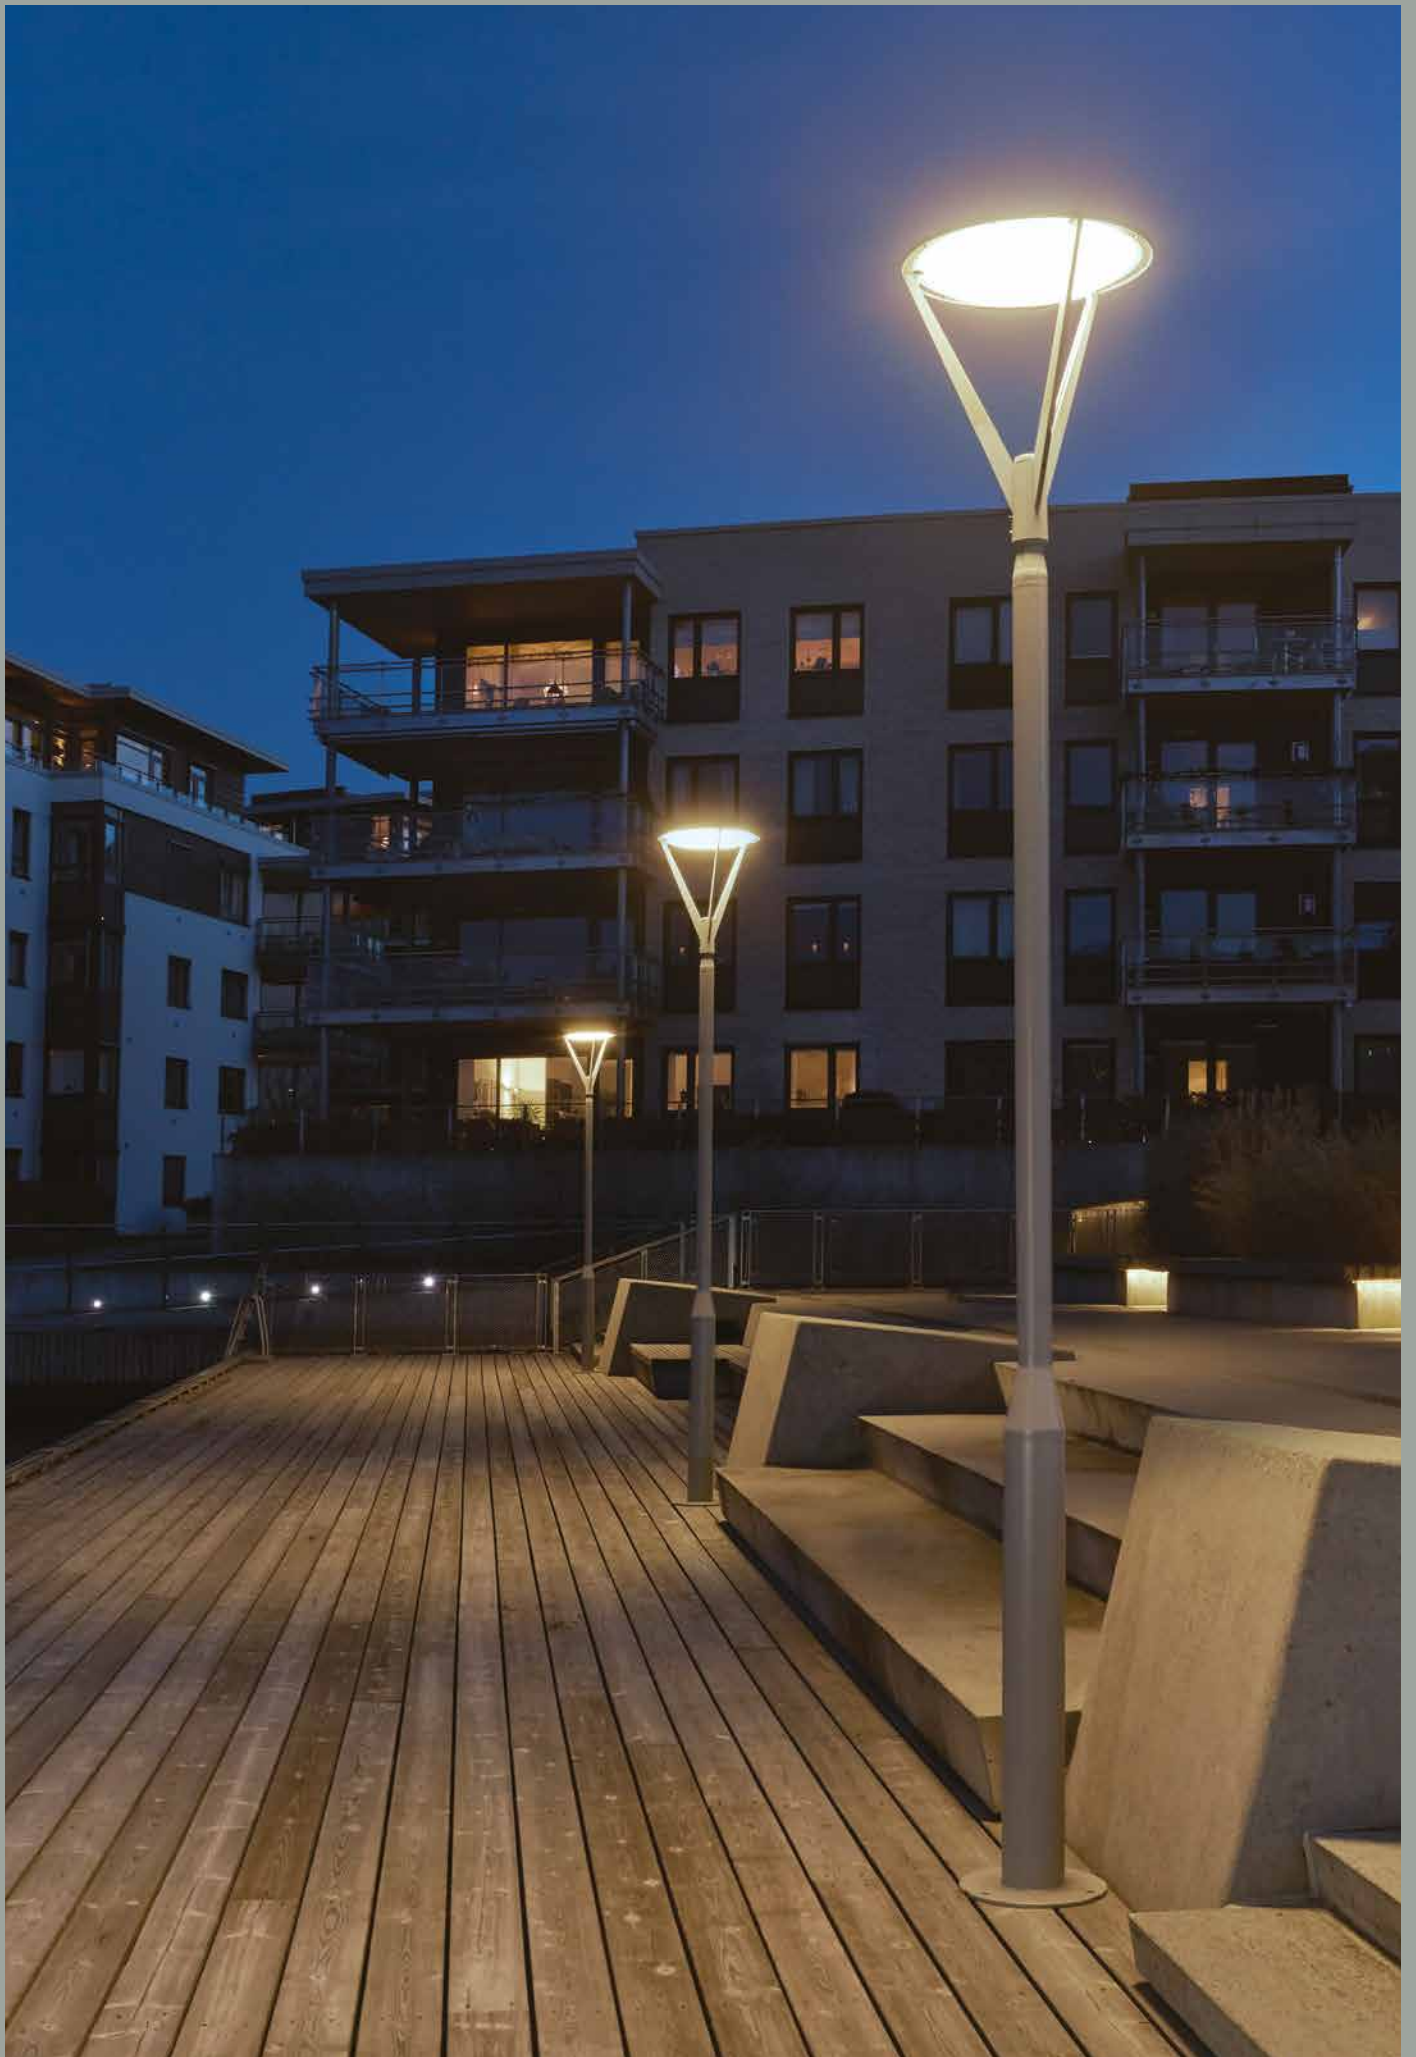

Hammerfest



Hammerfest mounted on pole 3004, further information on pages 417-418.

CE	220-240V	IP65	Grounding symbol	DIM	DALI
LED	Al	PMMA	6m	D4I	60



Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417-418.


Art. 7665

Adapter Ø60 for install on pole Ø76



Art. 154

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5135AL	LED	32,3W	3320lm	4000K	> 72 000h	-	
5135GR				3000K		DALI2/ NightDim	
5136AL		32,5W	3117lm	4000K			
5136GR			3310lm				
5137AL		32,7W	3227lm	3000K			> 50 000h
5137GR				4000K			
6141AL							
6141GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5130AL	LED	32W	3933lm	4000K	> 72 000h	-	
5130GR				3000K		DALI2/ NightDim	
5131AL		32,5W	3974lm	4000K			
5131GR			3721lm				
5132AL		26,4W	3321lm	3000K			> 54 000h
5132GR				4000K			
6140AL							
6140GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
6146AL	LED	53W	6519lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type V	
6146GR				4000K				
6148AL				6802lm				4000K
6148GR								
6147AL			6545lm	3000K		D4i		
6147GR								
6149AL			7375lm	4000K				
6149GR								

Kisa

Proven, robust, practical and at the same time suitable for illuminating the driveway is the Kisa luminaire equipped with the latest LED technology. The Kisa lamp in both bollard and pole versions utilizes a huge range of LED applications, offering several control versions and light directions. Light sources must be glare-free as this is a priority for safety and convenience. In Kisa this is ensured by the milky diffuser, giving an intense but non-glare beam of light. The luminaire is also ideal for energy-saving illumination in garden settings and walkway lighting.



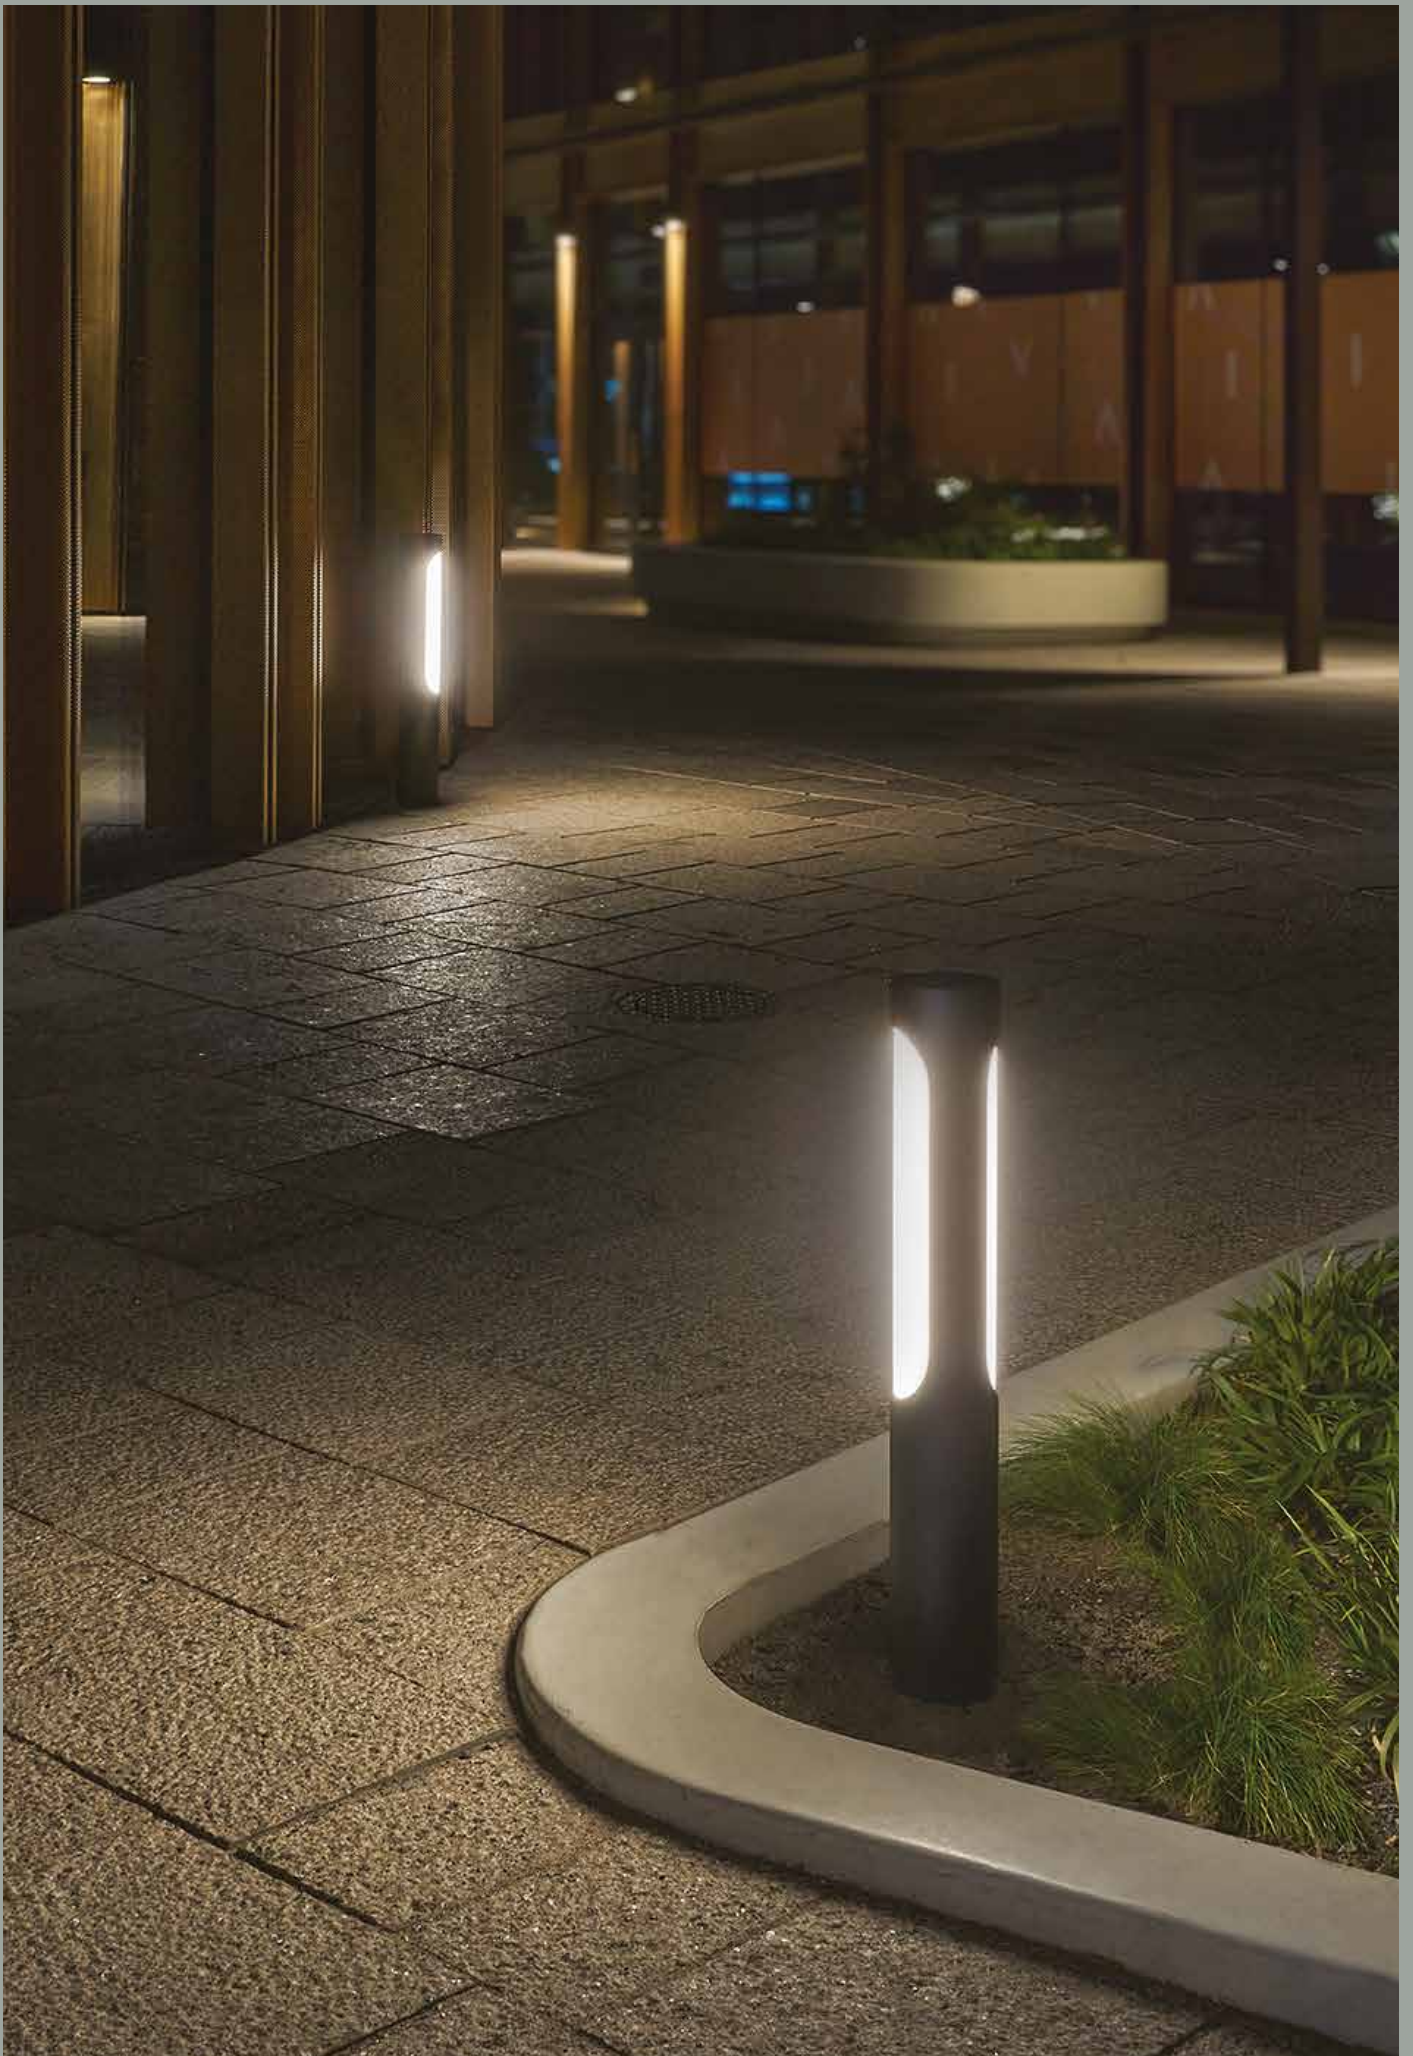

Kisa



Colour:

- Aluminium
- Graphite


Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5180AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable	
5180GR							
5182AL		14,1W	1185lm			4000K	DALI2/ NighDim
5182GR							
5181AL		8,8W	766lm	4000K		Dimmable	
5181GR							
5183GR		14,1W	1222lm			DALI2/ NighDim	
5183GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5184AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5184GR							
5186AL		27W	2432lm			4000K	DALI2/ NighDim
5186GR							
5187AL		13,4W	1357lm			Dimmable	
5187GR							
5185AL		13,4W	1357lm			Dimmable	
5185GR							

Kisa Pole



Colour:


- Aluminium
- Graphite

Colour temperature:

- 2700K* 3000K 4000K
- ● ○ ○
- *2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 6130

Concreting anchor




Art. 6132

Anchoring support 490mm



Art. 6135

Electric box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5190AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable	
5190GR				4000K			
5191AL			766lm	4000K			
5191GR				3000K			
5192AL		14,1W	1185lm	3000K		> 70 000h	DALI2/ NightDim
5192GR				4000K			
5193AL			1222lm	4000K			
5193GR				3000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5194AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5194GR				4000K			
5195AL			1357lm	4000K			
5195GR				3000K			
5196AL		27W	2432lm	3000K		> 70 000h	DALI2/ NightDim
5196GR				4000K			
5197AL			2637lm	4000K			
5197GR				3000K			

Koster

The classics have always had, have and will always have their followers. The Koster lamp family is a proposal for universal lighting. Koster is a group of luminaires with a universal design characterised by a symmetrical light distribution. This design seems to tame the space, introducing calmness and predictability. The Koster luminaire can be used on the outside façade of a building, in the garden, next to a pavement. There are indeed many possibilities. It is available in a wall and two column variants - single and double.





Koster



Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Art. 158

Corner bracket






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP	Lens
724AL	E27	-	-	-	-	-	IP54	-
724GR								
725AL	LED	9,5W	872lm	3000K	50 000h	-	IP54	IESNA type V
725GR			1568lm					
1912AL		17,5W		1625lm	4000K			
1912GR								
5004AL		16,9W		2090lm	3000K	>100 000h	Dimmable	
5004GR								
1834AL		19,6W		2007lm	4000K	>120 000h	DALI2/ NightDim	
1834GR								
1814AL		19,4W		2747lm	3000K			
1814GR								
1822AL	19,4W		2718lm	4000K				
1822GR								
1842AL								
1842GR								





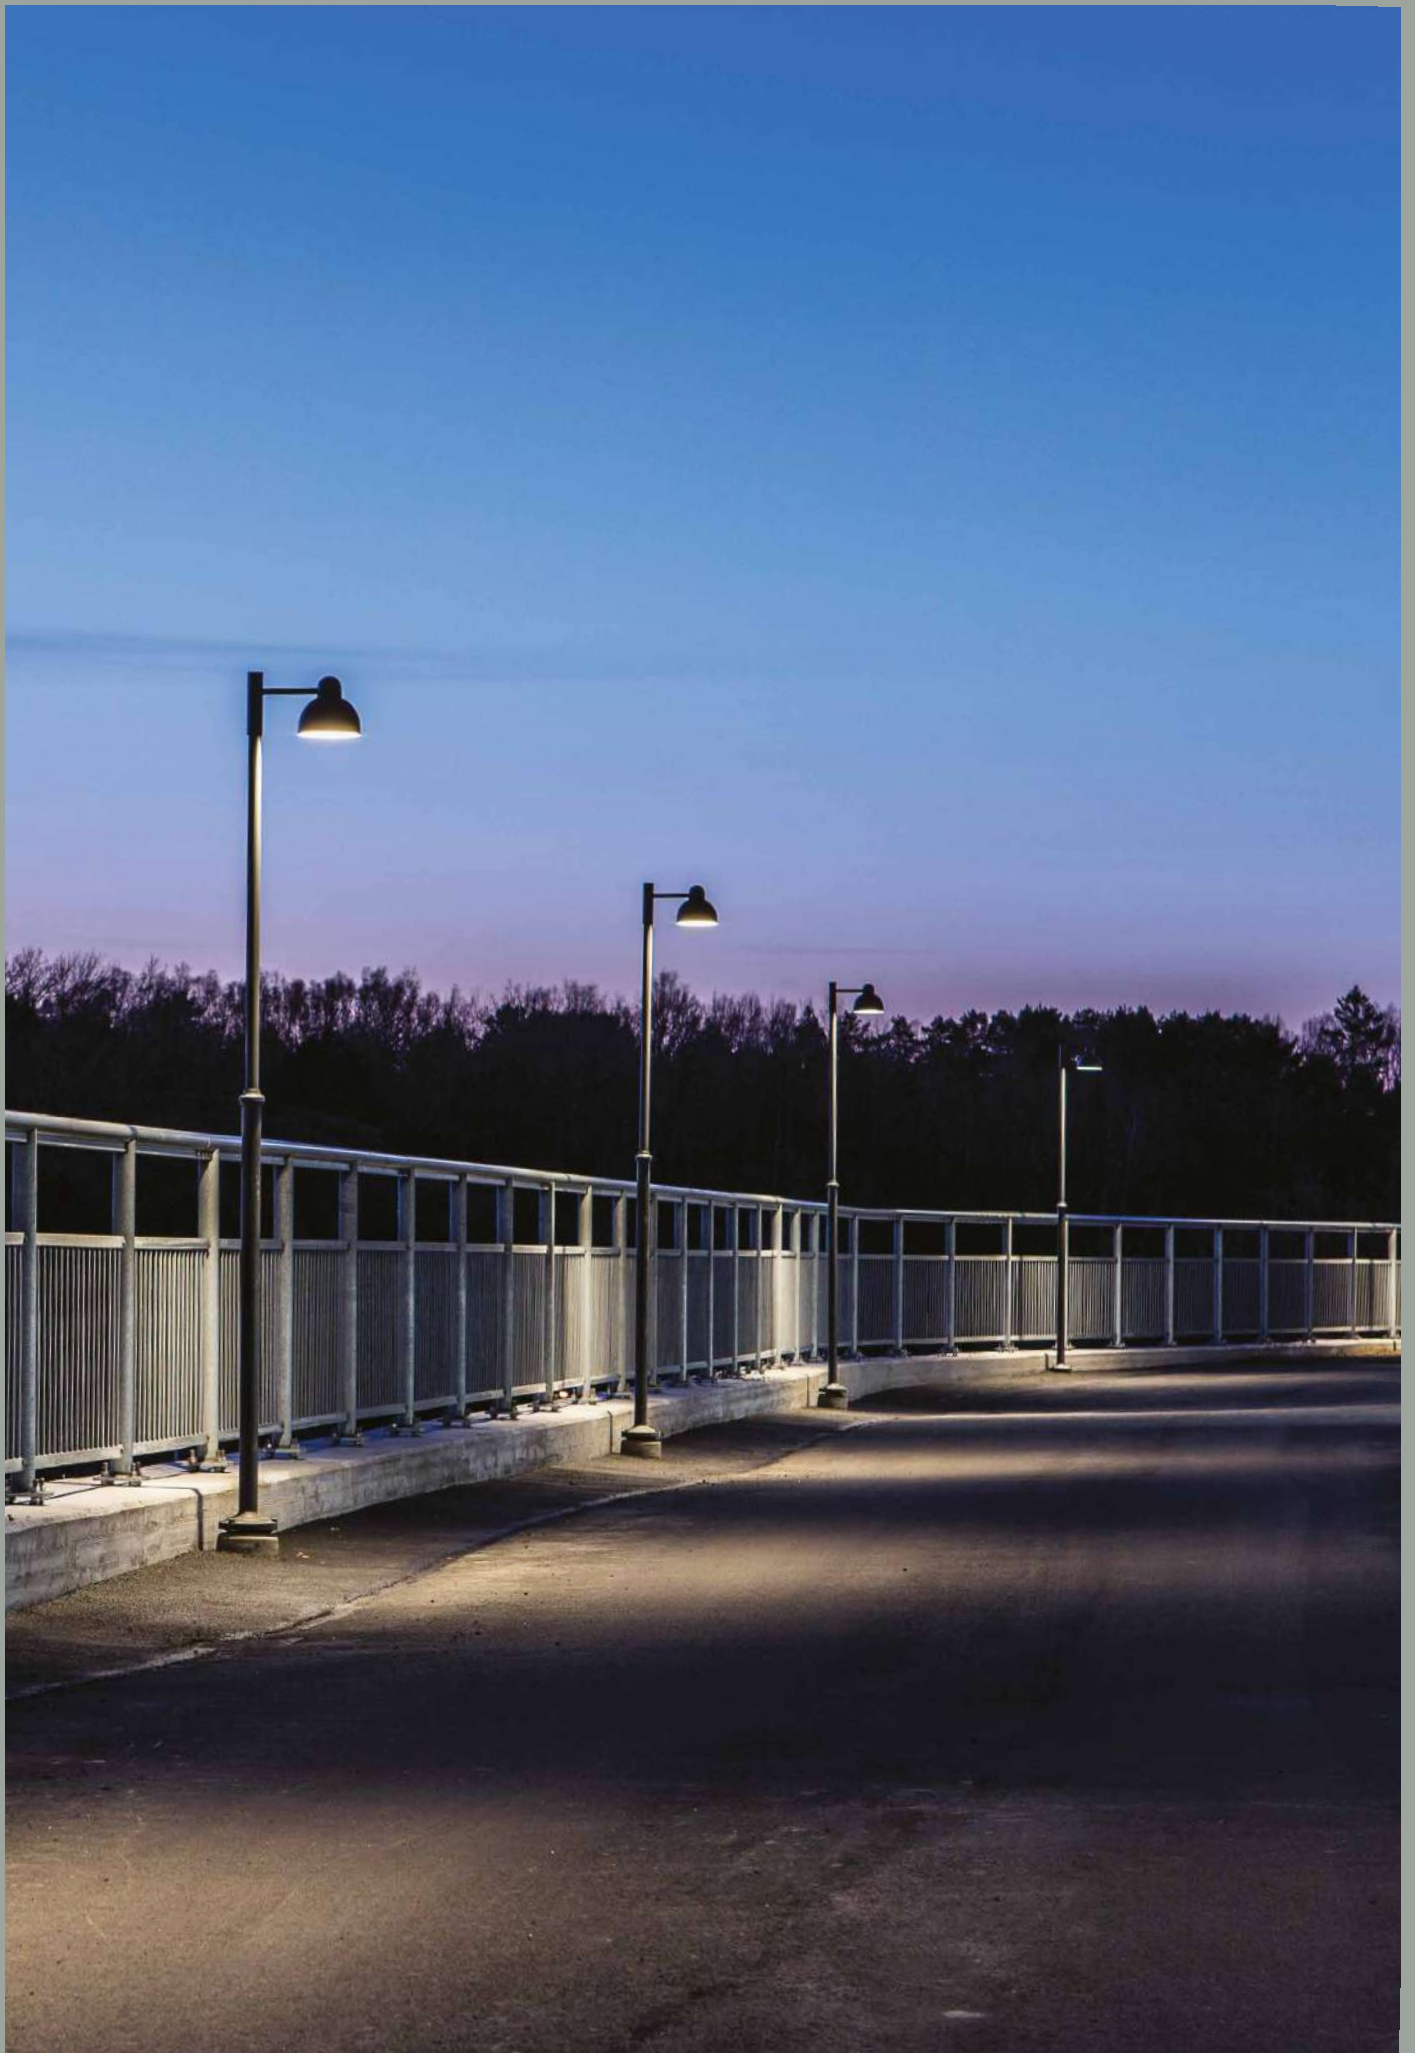


Koster Pole



Koster mounted on pole 1273, further information on pages 417 - 418.

CE	220-240V	IK10	IP65	⏚	DIM	DALI
LED	E27	Al	PC	50	60	

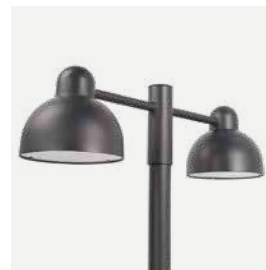

Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles $\varnothing 50$ and $\varnothing 60$, further information on pages 417 - 418.


Art. 7660

Adapter $\varnothing 60$ for mounting on pole $\varnothing 76$




Art. 405

Concreting anchor



Art. 406

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens					
1815AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V					
1815GR												
1823AL												
1823GR												
1843AL												
1843GR												
1835AL		14,4W	2031lm	4000K	50 000h	-	-					
1835GR												
5070AL		17,5W	1625lm	-				50 000h	-	-		
5070GR												
1915AL			1568lm	3000K							-	-
1915GR												



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens					
1817AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V					
1817GR												
1825AL												
1825GR												
1845AL												
1845GR												
1837AL		14,4W	2031lm	4000K	50 000h	-	-					
1837GR												
5006AL		17,5W	1625lm	-				50 000h	-	-		
5006GR												
1913AL			1568lm	3000K							-	-
1913GR												



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens					
1816AL	LED	14,4W	1991lm	3000K	> 120 000h	DALI2/ NightDim	IESNA type V					
1816GR												
1824AL												
1824GR												
1844AL												
1844GR												
1836AL		14,4W	2031lm	4000K	50 000h	-	-					
1836GR												
5007AL		17,5W	1625lm	-				50 000h	-	-		
5007GR												
1914AL			1568lm	3000K							-	-
1914GR												




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens			
1155AL	E27	-	-	-	-	-					
1155GR											
1157AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-			
1157GR			3250lm	4000K							
1159AL		34W	3422lm	3000K	> 120 000h	Dimmable	II				
1159GR			3624lm	4000K							
1165AL	LED	37W	3654lm	3000K				> 120 000h	DALI2/ NightDim	I	IESNA type V
1165GR			3825lm	4000K							
1167AL											
1167GR											
1173AL											
1173GR											
1175AL											
1175GR											



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens			
1177AL	E27	-	-	-	-	-					
1177GR											
1179AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-			
1179GR			3250lm	4000K							
1181AL		34W	3422lm	3000K	> 120 000h	Dimmable	II				
1181GR			3624lm	4000K							
1187AL	LED	37W	3654lm	3000K				> 120 000h	DALI2/ NightDim	I	IESNA type V
1187GR			3825lm	4000K							
1189AL											
1189GR											
1195AL											
1195GR											
1197AL											
1197GR											



Lillehammer

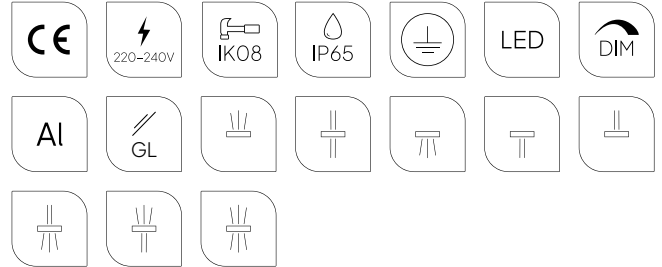

Colour:

- Aluminium
- Graphite
- Black
- White

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).








Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1580AL	LED	7,3W	126lm	3000K	> 102 000h	Dimmable
1580BL						
1580GR						
1580WH						
5027AL			130lm	4000K		
5027BL						
5027GR						
5027WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1581AL	LED	7,3W	216lm	3000K	> 102 000h	Dimmable
1581BL						
1581GR						
1581WH						
5028AL			231lm	4000K		
5028BL						
5028GR						
5028WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1582AL	LED	4W	107lm	3000K	> 102 000h	Dimmable
1582BL						
1582GR						
1582WH						
5029AL			112lm	4000K		
5029BL						
5029GR						
5029WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1583AL	LED	7,3W	34lm	3000K	> 102 000h	Dimmable
1583BL						
1583GR						
1583WH						
5030AL			38lm	4000K		
5030BL						
5030GR						
5030WH						






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1584AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1584BL						
1584GR						
1584WH						
5031AL			18lm	4000K		
5031BL						
5031GR						
5031WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1585AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1585BL						
1585GR						
1585WH						
1586AL			18lm	4000K		
1586BL						
1586GR						
1586WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1587AL	LED	4W	108lm	3000K	> 102 000h	Dimmable
1587BL						
1587GR						
1587WH						
1588AL			135lm	4000K		
1588BL						
1588GR						
1588WH						





Lillesand

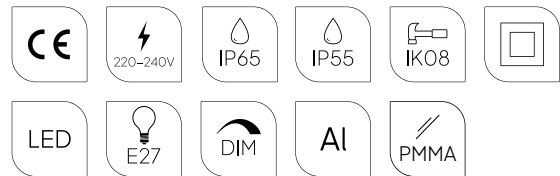

Colour:



Aluminium




Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1380AL	E27	-	-	-	-	-	IP55
1380GR							
1382AL	LEDE27	5,9W	495lm	2700K	25 000	Dimmable	
1382GR							
2330AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2330GR			956lm	4000K			
2331AL							
2331GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1383AL	E27	-	-	-	-	-	IP55
1383GR							
1384AL	LEDE27	5,9W	495lm	2700K	25 000	Dimmable	
1384GR							
2342AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2342GR			956lm	4000K			
2343AL							
2343GR							

Lillesand

scandinavian wood

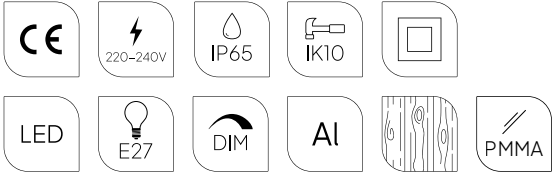

Colour:

- Aluminium
- Graphite

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Luminaire housing is made of natural wood.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2334AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2334GR				4000K		
2335AL			956lm	4000K		
2335GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2338AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2338GR				4000K		
2339AL			956lm	4000K		
2339GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2346AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2346GR				4000K		
2347AL			956lm	4000K		
2347GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2350AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2350GR				4000K		
2351AL			956lm	4000K		
2351GR						


Lysfjord

This wall fixture can be a real discovery for designers of urban spaces and individual investors. We have used innovative configurable lens systems that allows for original lighting effects. The Lysfjord luminaire, although simple in shape can conjure up an extraordinary atmosphere. The various options for setting the angle of incidence of wide or focused light rays, give a very wide range of possibilities for shaping the space with light. Outstanding quality from NORLYS including aluminium, safety glass, reliable and long-lasting LED.





Lysfjord

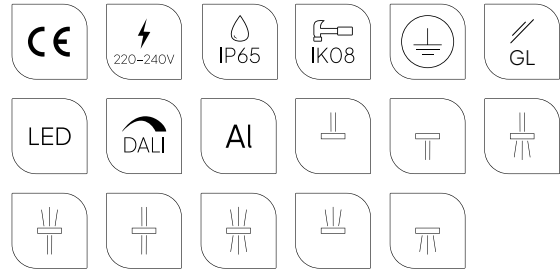

Colour:


- Aluminium
- Graphite
- Black
- White

Colour temperature:


- 2700K* 3000K 4000K
-
- *2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6401AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim
6401BL						
6401GR						
6401WH						
6421AL			37lm	4000K		
6421BL						
6421GR						
6421WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6402AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6402BL						
6402GR						
6402WH						
6422AL				4000K		
6422BL						
6422GR						
6422WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6403AL	LED	26,5W	1814lm	3000K	> 70 000h	DALI2/ NightDim
6403BL						
6403GR						
6403WH						
6423AL				4000K		
6423BL						
6423GR						
6423WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6404AL	LED	26,5W	78lm	3000K	> 70 000h	DALI2/ NightDim
6404BL						
6404GR						
6404WH						
6424AL				4000K		
6424BL						
6424GR						
6424WH						

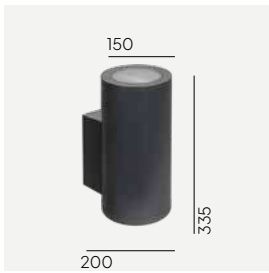

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6405AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6405BL						
6405GR						
6405WH						
6425AL						
6425BL						
6425GR						
6425WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6406AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim	
6406BL							
6406GR							
6406WH							
6426AL			37lm	4000K			
6426BL							
6426GR							
6426WH							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6407AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim	
6407BL							
6407GR							
6407WH							
6427AL			1016lm	4000K			
6427BL							
6427GR							
6427WH							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6408AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim	
6408BL							
6408GR							
6408WH							
6428AL			1016lm	4000K			
6428BL							
6428GR							
6428WH							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2026AL	LED	8W	386lm	3000K	50 000	Dimmable
2026GR						
2027AL			438lm	4000K		
2027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
2028AL	LED	8W	386lm	3000K	50 000	PIR
2028GR						
2029AL			438lm	4000K		
2029GR						



Molde

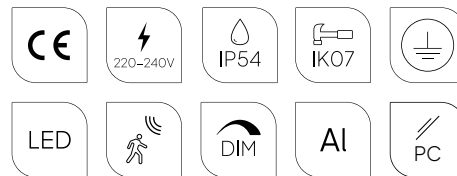

Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

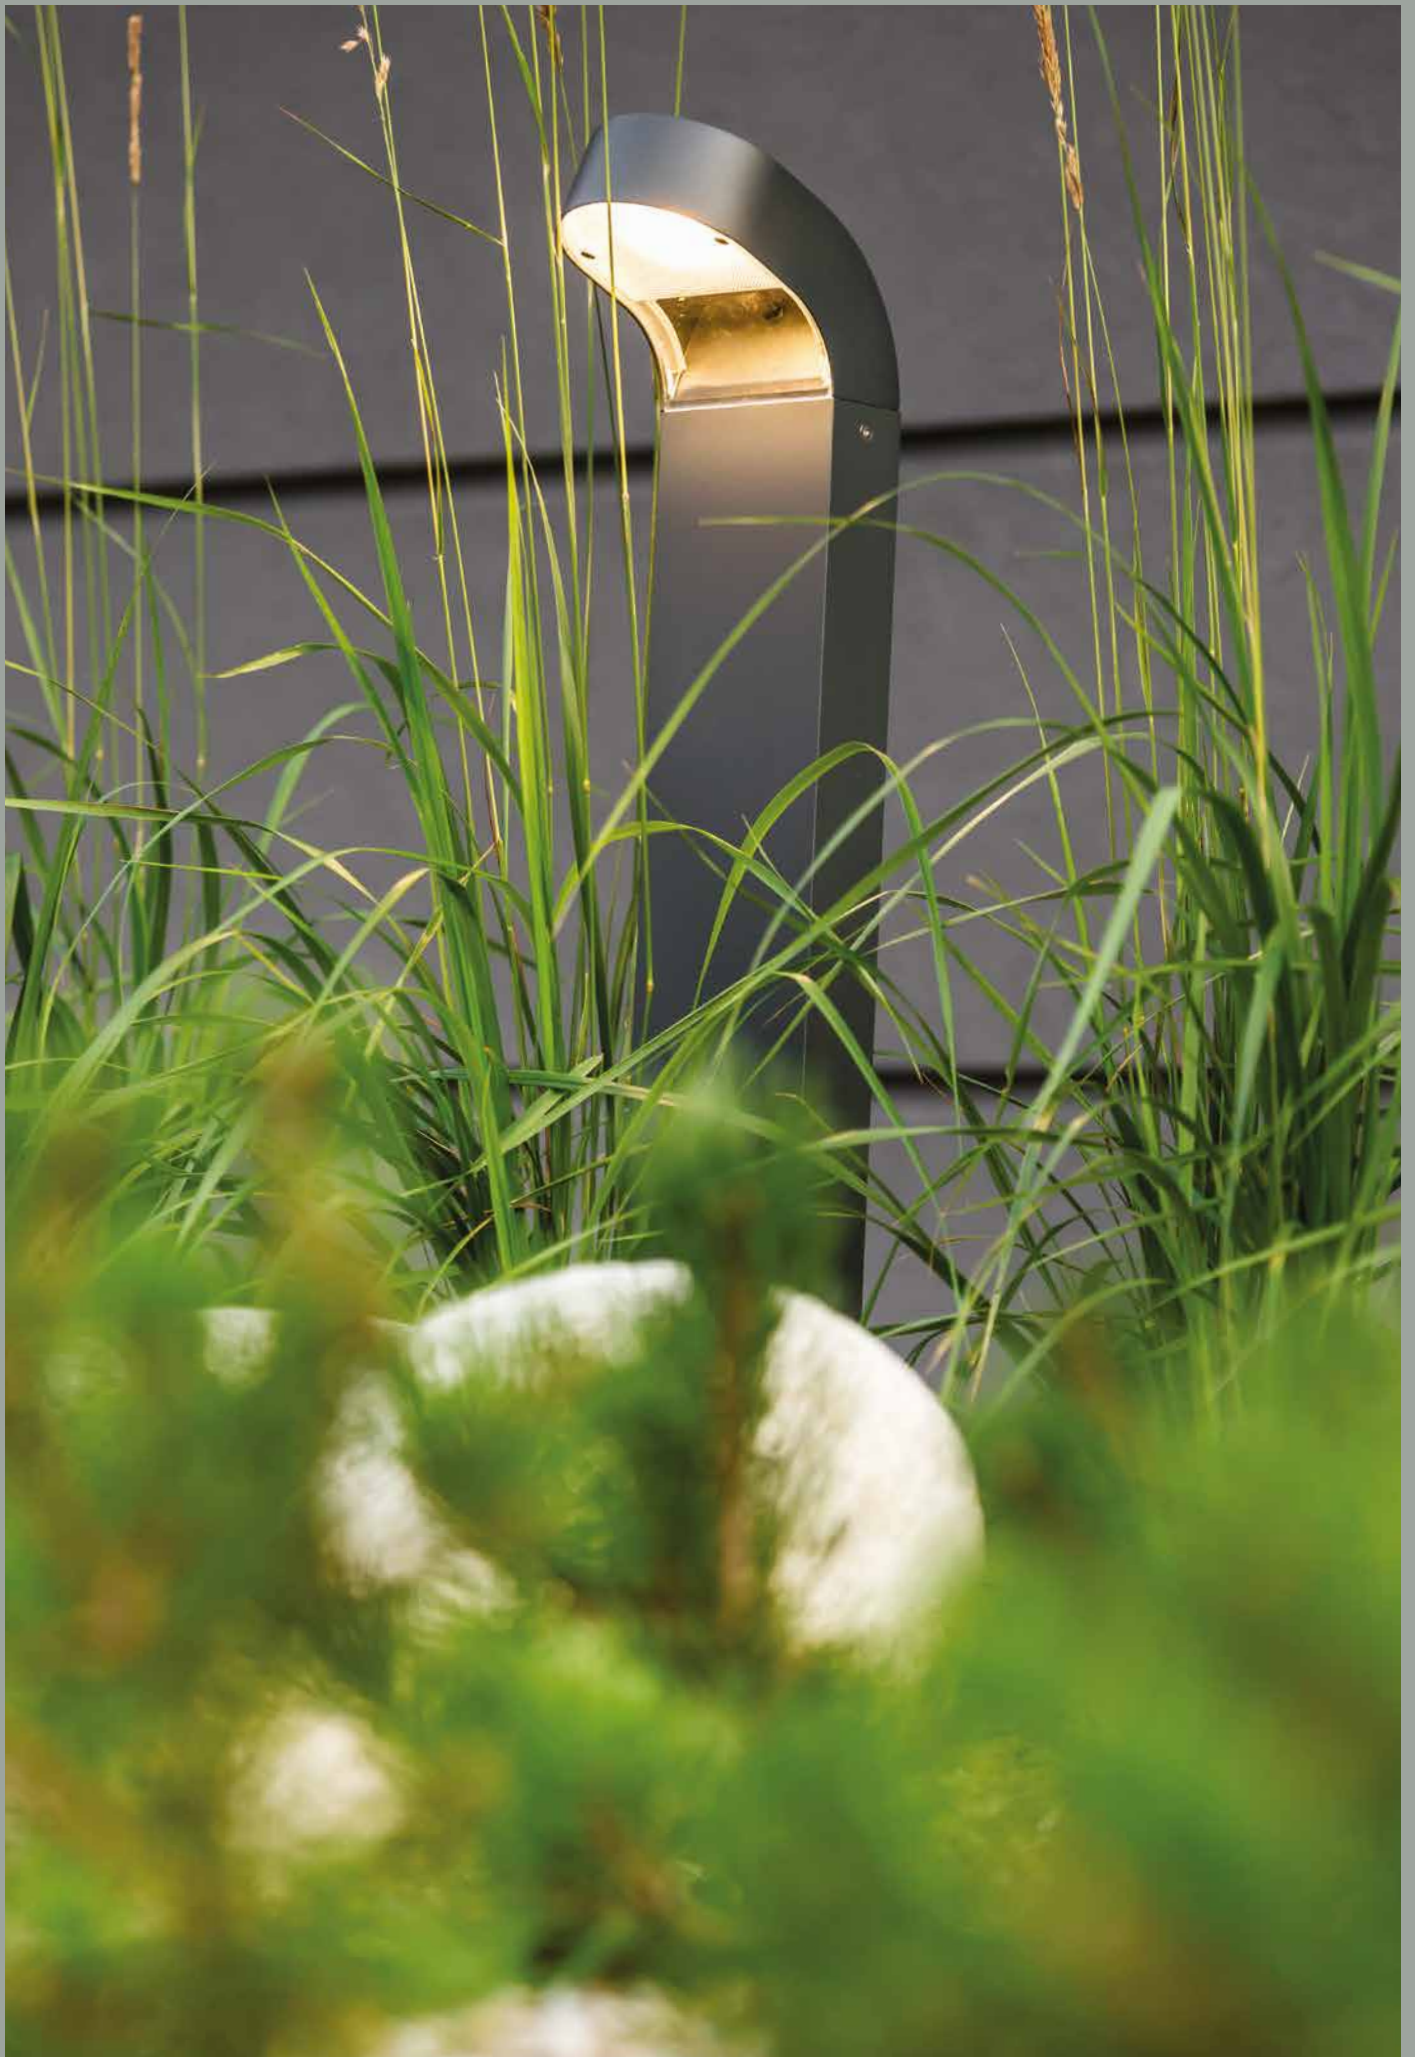

Molde



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1907


Concreting anchor



Art. 1908

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1901AL	LED	8W	386lm	3000K	50 000	Dimmable
1901GR				4000K		
5107AL			438lm	4000K		
5107GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1970AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1970GR				4000K		
1972AL			438lm	4000K		
1972GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1903AL	LED	8W	386lm	3000K	50 000	Dimmable
1903GR				4000K		
1904AL			438lm	4000K		
1904GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1971AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1971GR				4000K		
1973AL			438lm	4000K		
1973GR						

Mora

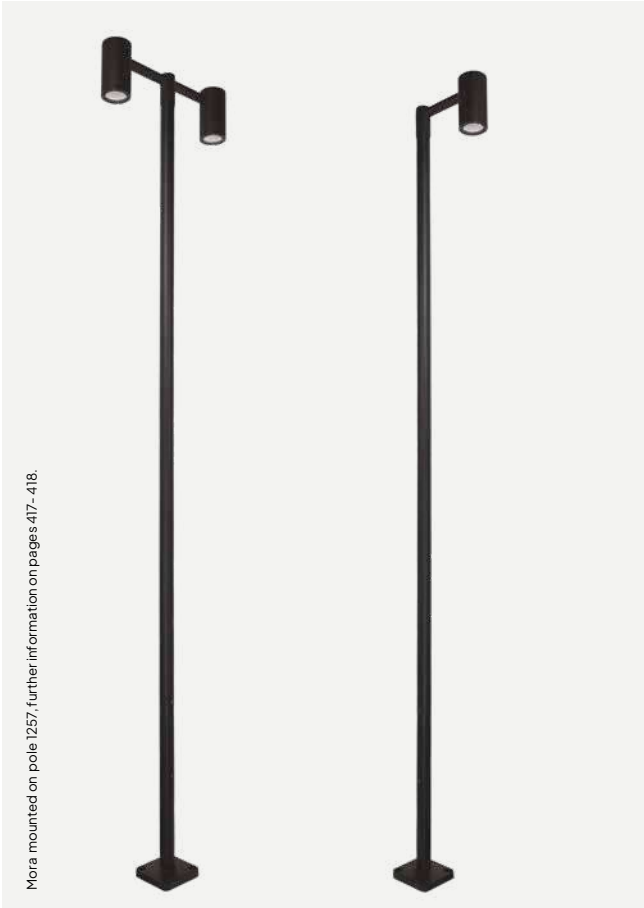

Mora mounted on pole 1257, further information on pages 417- 418.

CE	220-240V	IP65	IK08	⏚
LED	DALI	Al	GL	60



Colour:

- Aluminium
- Graphite
- Black


Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Product Eco-friendly.





Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.

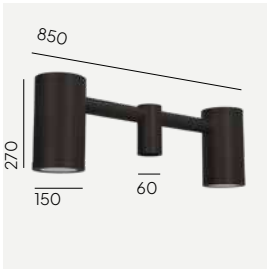

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6466AL	LED	33,9W	3229lm	3000K	> 110 000h	DALI2/ NigthDim
6466BL						
6466GR						
6467AL		33,5W	3437lm	4000K		
6467BL						
6467GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6460AL	LED	17,6W	1626lm	3000K	> 110 000h	DALI2/ NigthDim
6460BL						
6460GR						
6461AL			1735lm	4000K		
6461BL						
6461GR						

Moss

Moss spotlights combine a simple form with small dimensions. They are ideal for illuminating small architecture, individual trees or other elements of the garden layout important to the owner. Thanks to their small size, Moss can be hidden and the light will be the main feature. The undoubted strengths of this family of luminaires, thanks to the innovative use of a phase dimming system, are the ability to select the power, colour and brightness adjustment of the light source. The luminaires in the Moss family offer angle adjustment and versatility through a variety of mounting options. These include ceiling-mounted, pole-mounted, portable, driven into the ground and free-standing bollards variants.



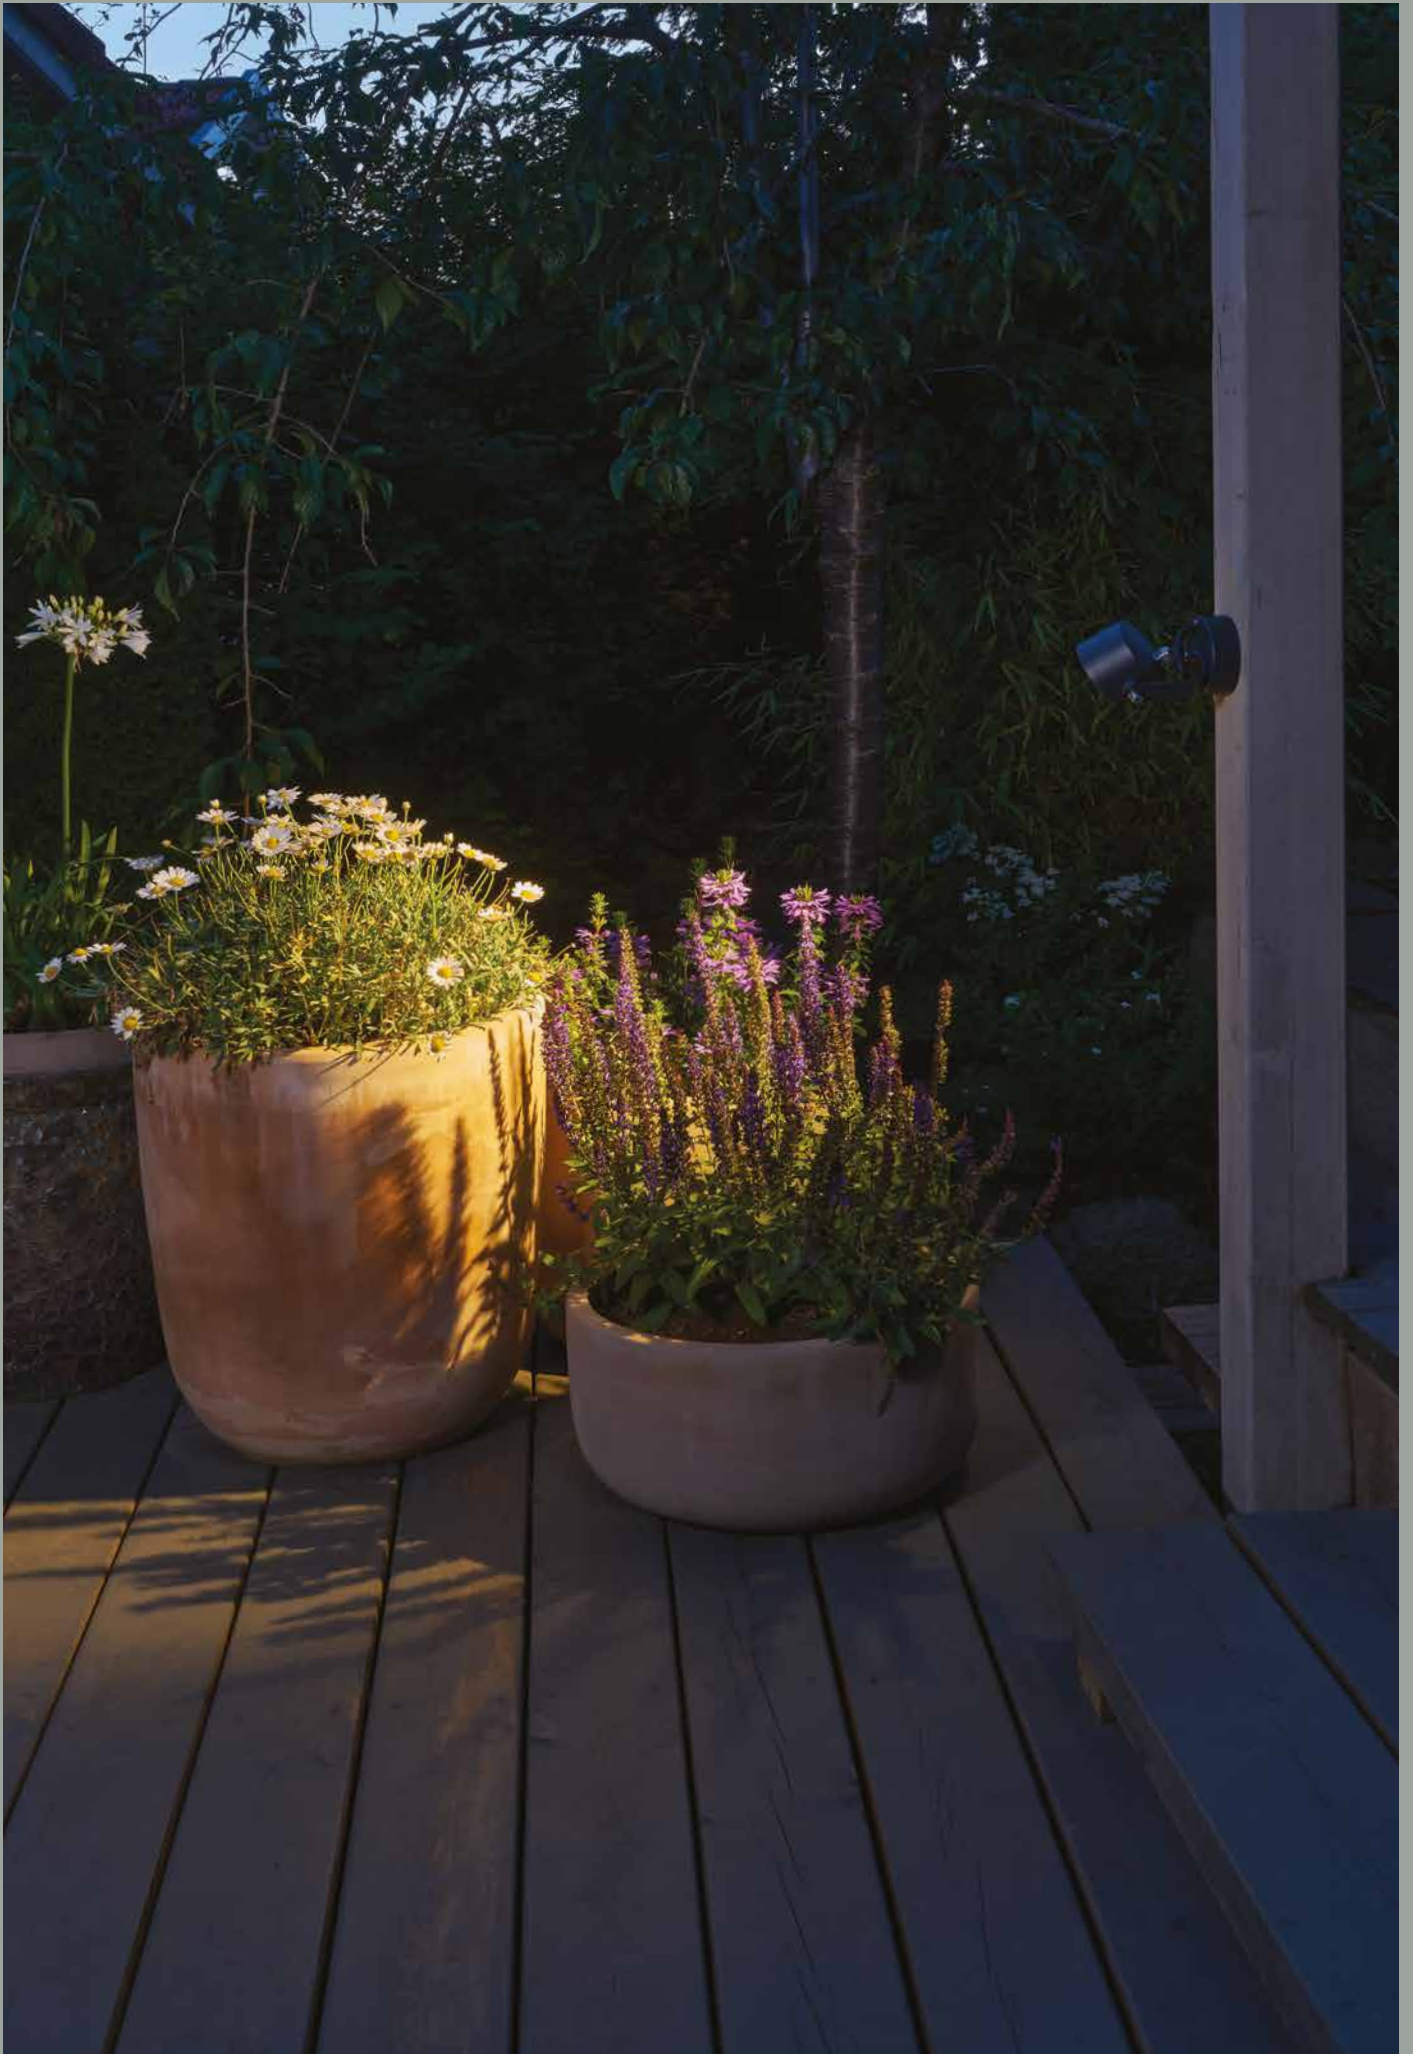

Moss



Colour:

- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:

Art. 6437

Plate





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6161BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6161GR							
6162BL			414lm				
6162GR							
6163BL		8W	686lm				3000K
6163GR							
6164BL			749lm				4000K
6164GR							

*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6772BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6772GR						
6778BL		4W	389lm			
6778GR						

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



60
205

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Clamp
6732BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	Ø50
6732GR							
6750BL		8W	686lm				
6750GR							
6735BL		4W	389lm				Ø60
6735GR							
6753BL		8W	686lm				
6753GR							
6738BL		4W	389lm				Ø76
6738GR							
6756BL		8W	686lm				
6756GR							

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6702BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6702GR						
6706BL		4W	389lm			
6706GR						

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

Moss




Colour:

- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145

Hermetic IP68 box with 3 lines




Art. 6729

Head mount




Art. 6439

Special clams.



Art. 6434 (ø50), 6435 (ø60), 6436 (ø76)


Clams.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6165BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6165GR			414lm	4000K			
6166BL							8W
6166GR			749lm	4000K			
6167BL		686lm					
6167GR			749lm	4000K			
6168BL		686lm					3000K
6168GR			749lm	4000K			

*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6602BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6602GR			414lm	4000K			
6603BL							8W
6603GR			749lm	4000K			
6600BL		686lm					
6600GR			749lm	4000K			
6601BL		686lm					3000K
6601GR			749lm	4000K			

*All indexes also available with 15° or 24° light angle, contact your supplier.

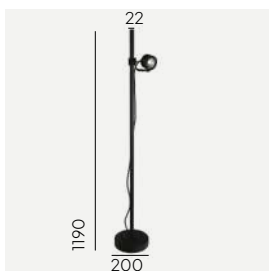

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6473BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6473GR						
6471BL		8W	686lm			
6471GR						


*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6485BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6485GR						
6483BL		8W	686lm			
6483GR						

*All indexes also available in 4000K and 2700K versions, and with 15° or 24° light angle, contact your supplier.

Moss

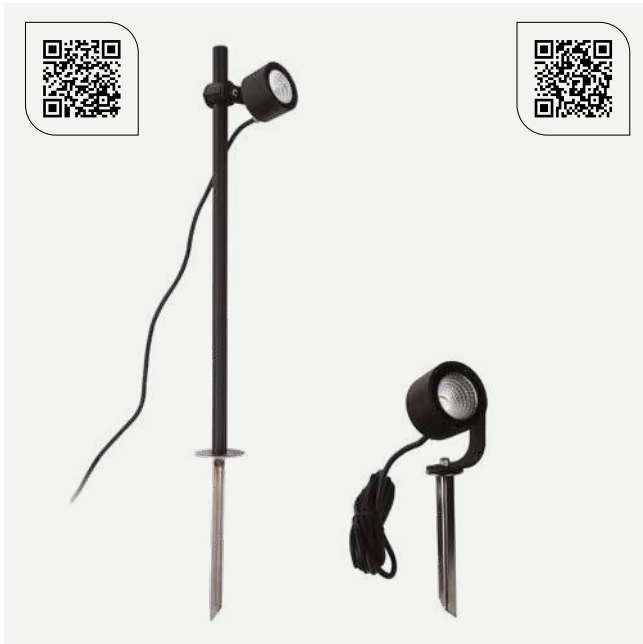

Colour:

- Black
- Graphite
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.


CE	220-240V	IP65	Grounding symbol	Recycling symbol	36° beam angle
LED	DIM	Al	GL	INOX	



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145


Hermetic IP68 box with 3 lines



Art. 146


8-way connection box IP68





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6346BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6346GR							
6346ST							
6352BL			8W	414lm			4000K
6352GR							
6352ST							
6376BL		749lm		4000K			
6376GR							
6376ST							
6370BL		8W	686lm	3000K'			
6370GR							
6370ST							

*All indexes also available with 15° or 24° light angle, contact your supplier.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6355BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	
6355GR							
6355ST							
6361BL			8W	414lm			4000K
6361GR							
6361ST							
6385BL		749lm		4000K			
6385GR							
6385ST							
6379BL		8W	686lm	3000K			
6379GR							
6379ST							

*All indexes also available with 15° or 24° light angle, contact your supplier.

Moss



Colour:

- Black
- Graphite
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.


CE	220-240V	IP65	Grounding symbol	GL	Adjustable beam
LED	DIM	Al	Fe	INOX	36° beam angle



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

Accessories:


Art. 145

Hermetic IP68 box with 3 lines





Nordland

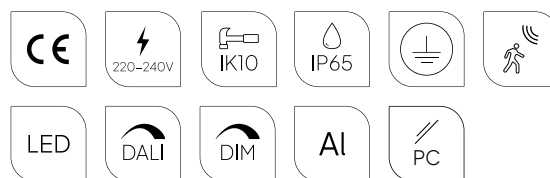

Colour:

- Aluminium
- White
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.





Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



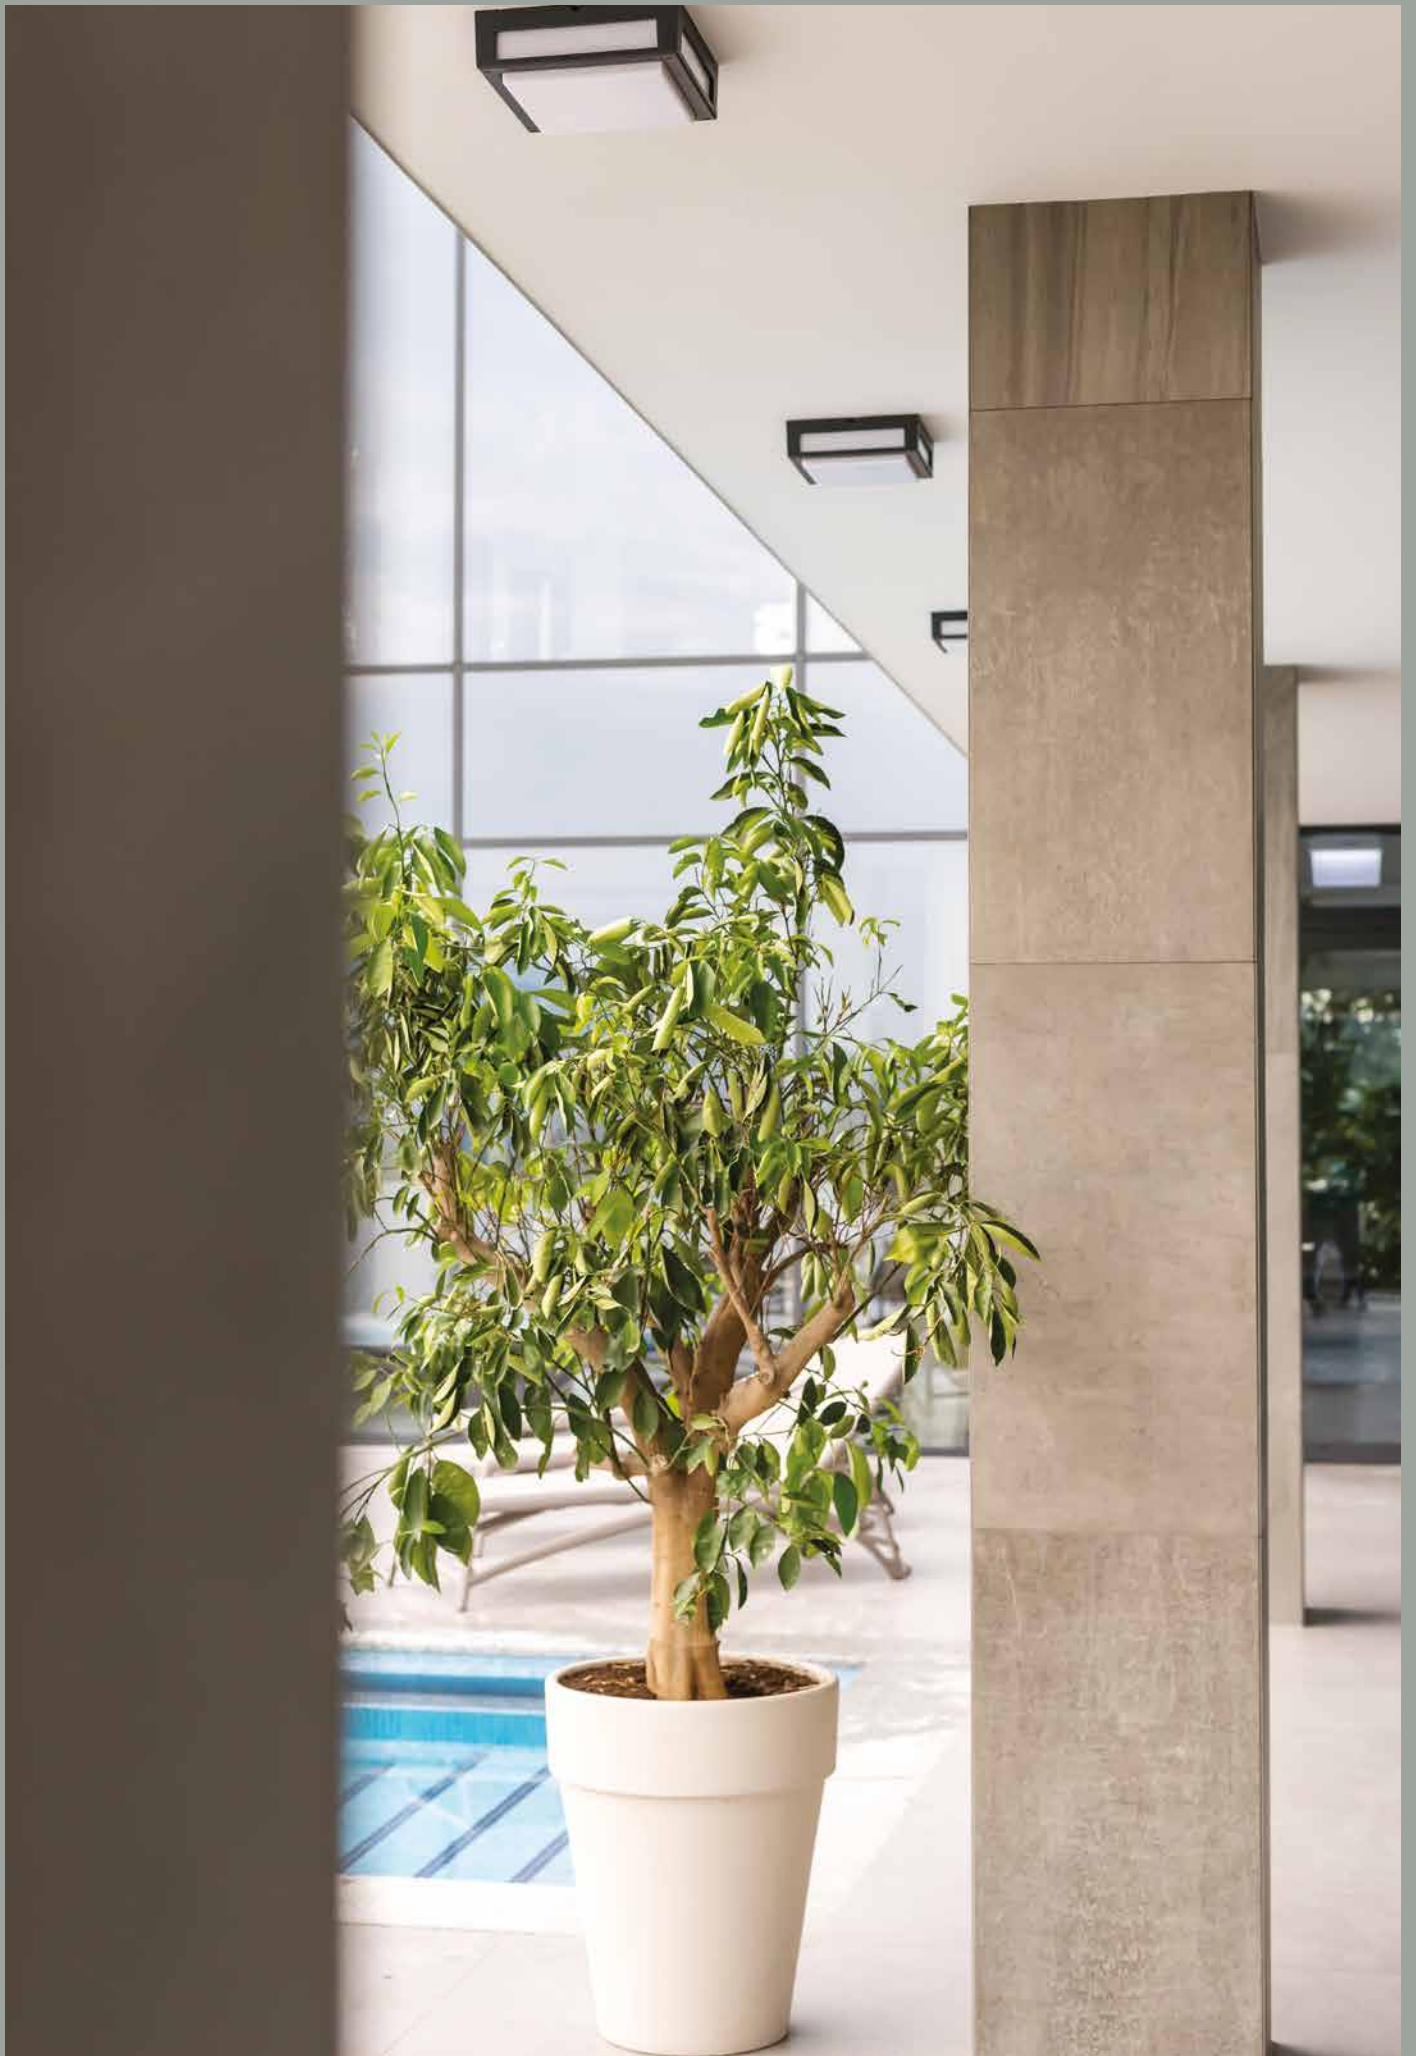

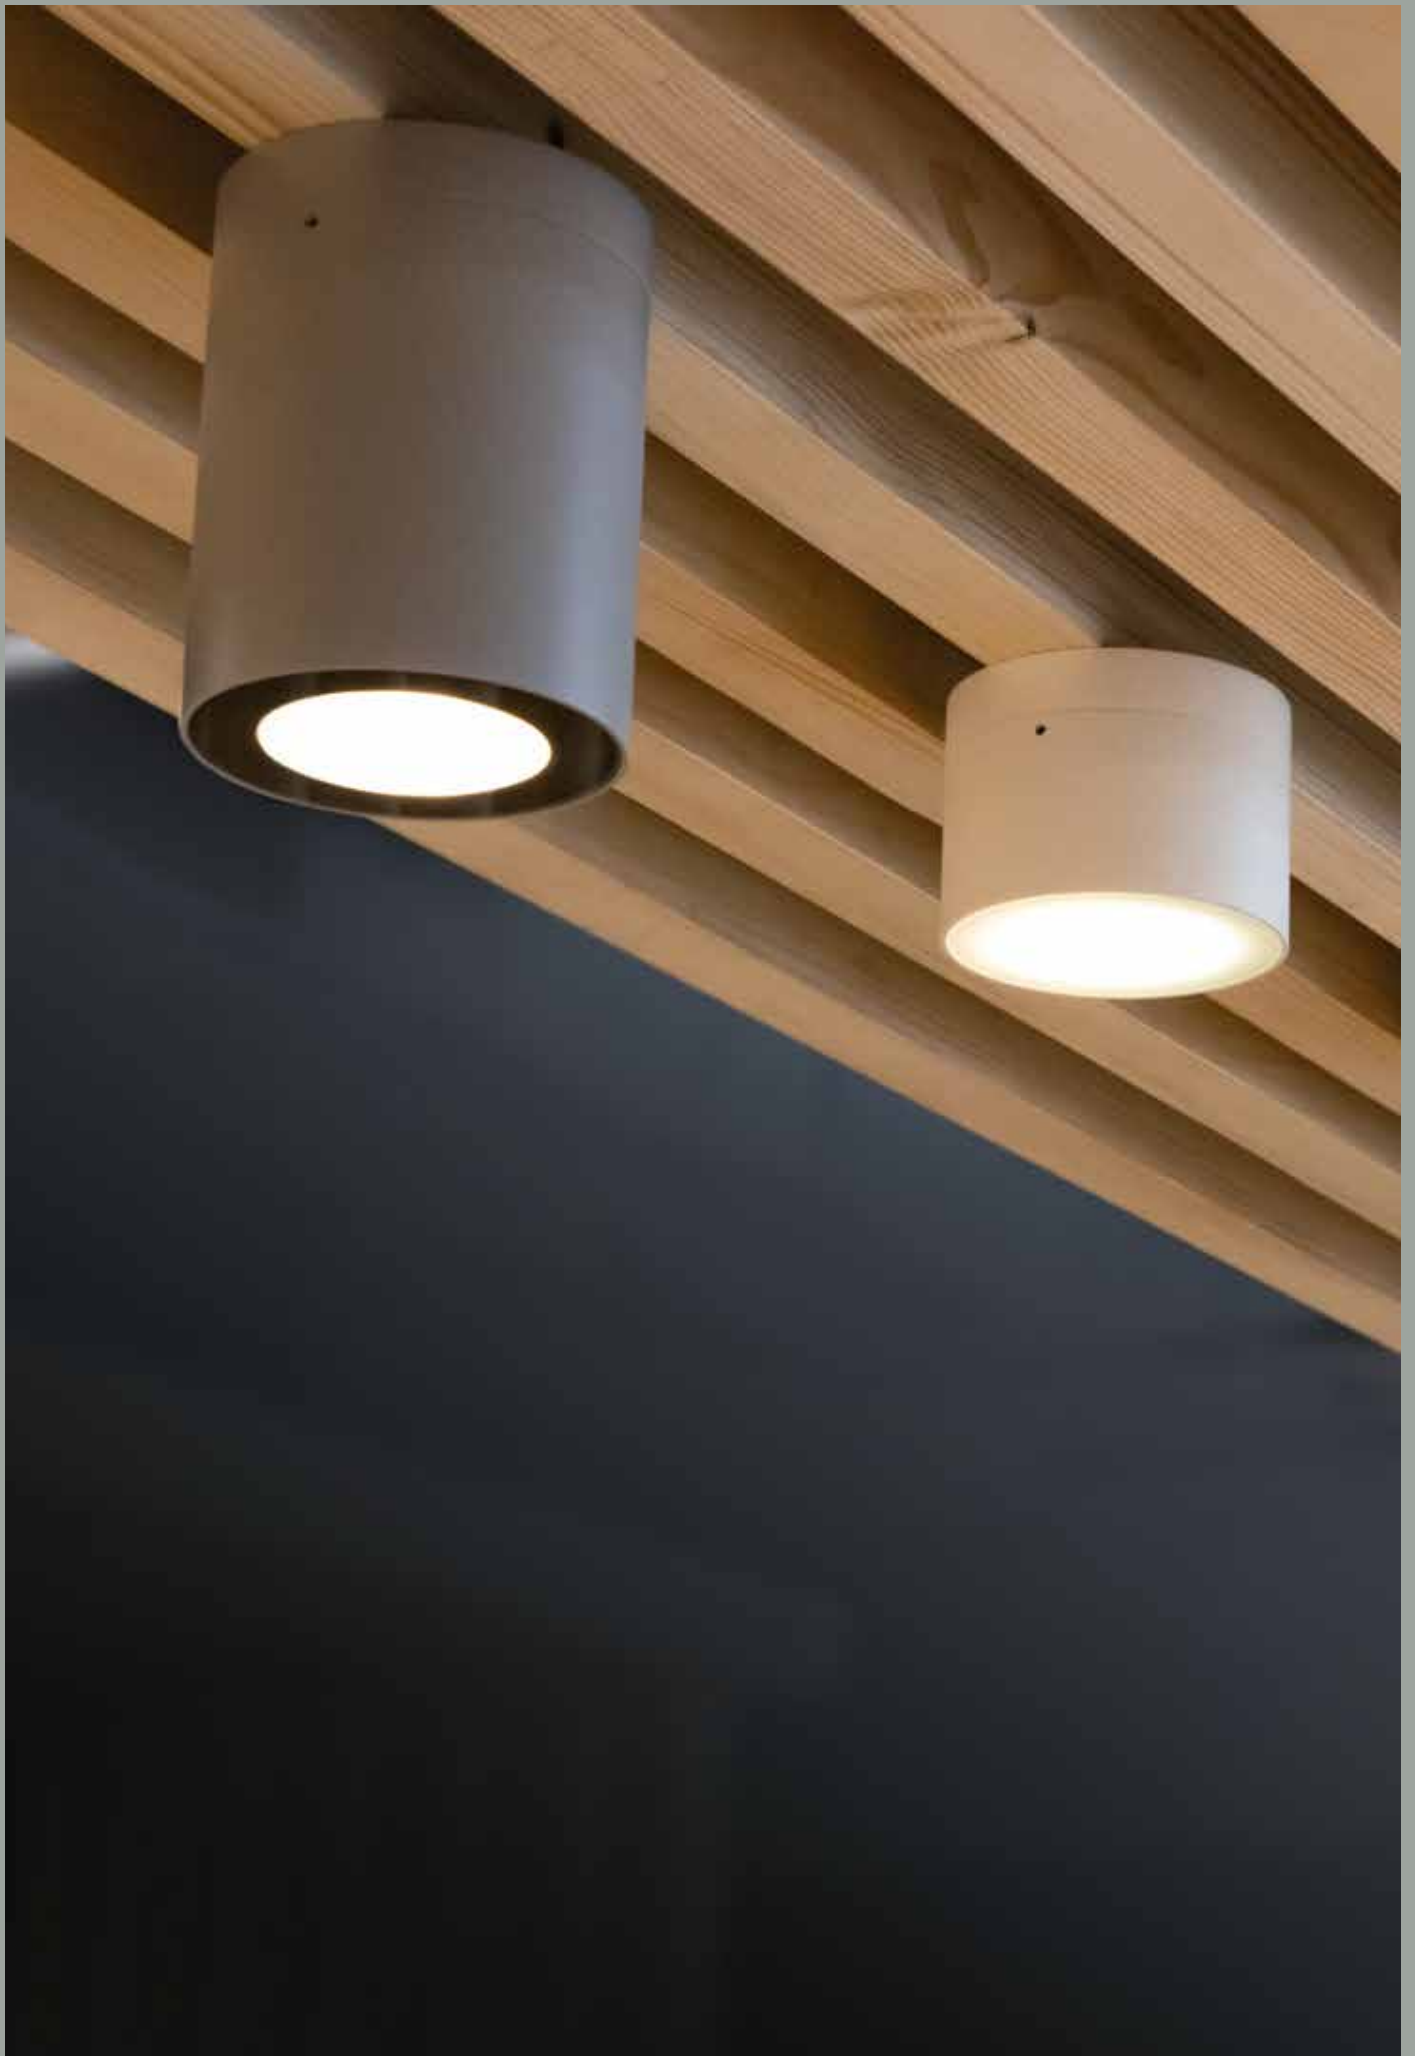

Nidaros



Colour:

- Aluminium
- Graphite
- Black
- White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Art. 3084

Distance.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2122AL	LED	8,3W	765lm	3000K	> 50 000h	Dimmable
2122BL						
2122GR						
2122WH						
2125AL		8,5W		4000K	50 000h	
2125BL						
2125GR						
2125WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2121AL	LED	7,8W	765lm	3000K	>110 000h	Dimmable
2121BL						
2121GR						
2121WH						
2124AL		8,5W		4000K	50 000h	
2124BL						
2124GR						
2124WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2120AL	LED	10,7W	631lm	3000K	50 000h	Dimmable
2120BL						
2120GR						
2120WH						
2123AL				4000K		
2123BL						
2123GR						
2123WH						


Narvik

It looks robust and it really is. This bollard is a luminaire with a legendary durability that will cope perfectly with any weather conditions. The path leading to the gate, the terrace where we spend long summer evenings, the driveway - the Narvik bollard will work everywhere. The ingeniously designed diffuser emits a rotationally symmetrical stream of light, and thanks to the use of the latest technology, the luminaire provides a maximum field of illumination in relation to its size. Narvik is the ideal solution for modern architecture. It is also available in a PRO version, which, with half the power of the luminaire compared to the basic model, provides 30% more light output.





Narvik

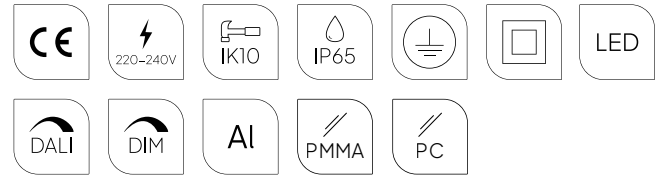

Colour:

- Aluminium
- Graphite

Colour temperature:


- 2700K*
- 3000K
- 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Vandal-resistant luminaire.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 505

Concreting anchor




Art. 110

Ground anchor



Art. 115

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
557AL	LED	21,8W	556lm	3000K	> 110 000h	-	
557GR						-	
5091AL		22,5W	597lm	3000K		DALI2/ NightDim	
5091GR						-	
5024AL		21,8W	564lm	4000K	> 50 000h	-	
5024GR						-	
5090AL			582lm		4000K	> 50 000h	DALI2/ NightDim
5090GR							-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1735AL	LED	22,2W	1122lm	3000K	> 72 000h	DALI2/ NightDim			
1735GR						-			
1850AL						13,4W	666lm	3000K	-
1850GR									-
559AL		757lm	4000K	> 72 000h		DIM			
559GR						-			
1733AL		22,2W	1162lm	4000K	> 72 000h	DALI2/ NightDim			
1733GR						-			
1737AL						-			
1737GR						-			
1851AL		-							
1851GR		-							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1736AL	LED	22,2W	1416lm	3000K	> 72 000h	DALI2/ NightDim			
1736GR						-			
1852GR						13,6W	853lm	3000K	-
1852GR									-
553AL		959lm	4000K	> 72 000h		DIM			
553GR						-			
1734AL		22,2W	1475lm	4000K	> 72 000h	DALI2/ NightDim			
1734GR						-			
1738AL						-			
1738GR						-			
1853AL		-							
1853GR		-							

Namos

Lighting should give us a feeling of safety and comfort when moving around. Namos will be perfect for lighting stairs, steps, staircases and passageways. We recommend Namos where you need to illuminate the most important points of your property, especially if there is a difference in level. This unusual luminaire will work perfectly as a modern lighting solution for wall surfaces and guarantees even illumination of the area under the lams. It looks equally good built into the wall as well as the bollard version.



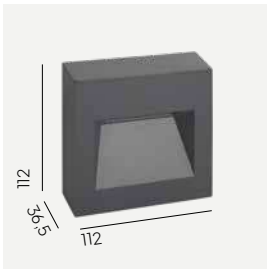

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1341AL	LED	4W	123lm	3000K	> 50 000	Dimmable
1341GR						
5156AL		4,2W	162lm	4000K		
5156GR						



Namsos



Colour:

- Aluminium
- Graphite

Colour temperature:


- 2700K*
- 3000K
- 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 157

Mounting distance





Namsos

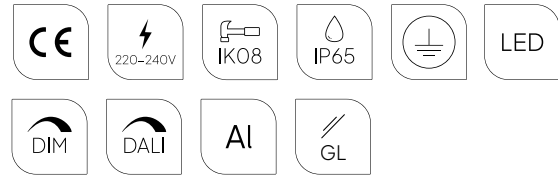

Colour:

- Aluminium
- Graphite

Colour temperature:


- 2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 112

Concreting anchor



Art. 113

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1931AL	LED	8,4W	566lm	3000K	> 102 000h	Dimmable	
1931GR							
5012AL		8,6W	612lm	4000K			DALI2
5012GR							
6035AL		13,8W	877lm	4000K		DALI2	
6035GR							
6033AL		13,6W	843lm	3000K			Dimmable
6033GR							
1921AL		13,6W	843lm	3000K		Dimmable	
1921GR							
1922AL		14W	907lm	4000K			Dimmable
1922GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1932AL	LED	8,6W	566lm	3000K	> 102 000h	Dimmable	
1932GR							
5013AL		8,6W	612lm	4000K			DALI2
5013GR							
6036AL		13,8W	877lm	4000K		DALI2	
6036GR							
6034AL		13,6W	843lm	3000K			Dimmable
6034GR							
1923AL		13,6W	843lm	3000K		Dimmable	
1923GR							
1924AL		14W	907lm	4000K			Dimmable
1924GR							








Namsos



Colour:

-  Aluminium
-  Graphite
-  Galvanized

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1929AL	LED	13,6W	843lm	3000K	> 102 000h	Dimmable
1929GR						
1930AL		8,4W	566lm			
1930GR						
6032AL		13,8W	904lm			
6032GR						
1934AL		14W	907lm	4000K		Dimmable
1934GR						
5011AL		8,6W	612lm			
5011GR						
6031AL		13,8W	877lm	DALI2		
6031GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1933GA	LED	5,2W	295lm	3000K	> 70 000	Dimmable
5116GA			689lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1340AL	LED	4W	47lm	3000K	> 50 000h	Dimmable
1340GR						

Namsos Mini



Colour:

- Aluminium
- Graphite


Colour temperature:

- 2700K*
- 3000K
- 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Nice



Nice mounted on pole 3004, further information on pages 417- 418.



Colour:

- Aluminium
- Graphite


Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:

Luminaires sold separately, recommended poles $\varnothing 60$, further information on pages 417- 418.


Art. 154

Wall mounting arm



Art. 7665

Reduction for fittings $\varnothing 60$ for mounting on a pole $\varnothing 76$





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
777AL	LED	38W	3029lm	3000K	> 110 000h	-
777GR						
5089GR		36.3W	2964lm	4000K	> 50 000h	DALI2/ NightDim
5089AL						
5088AL						
5088GR		38W	3092lm	4000K	> 110 000h	-
5001AL						
5001GR						




Oppland

The Oppland bollards will work fantastically between a garden path and a flower bed. They will illuminate a passage, add mystery to the plants and give depth to the garden.

The Oppland luminaires family stands for energy-saving LED technology, minimalist yet elegant design, durability of materials and reliability. Choice between a modern-style aluminium body or a wooden body, in two colours, in arrangements closer to nature. Oppland bollards will not only provide exceptionally effective lighting. They will bring an elegant and modern accent to any environment that is sure to attract attention. Oppland simply illuminates beautifully.



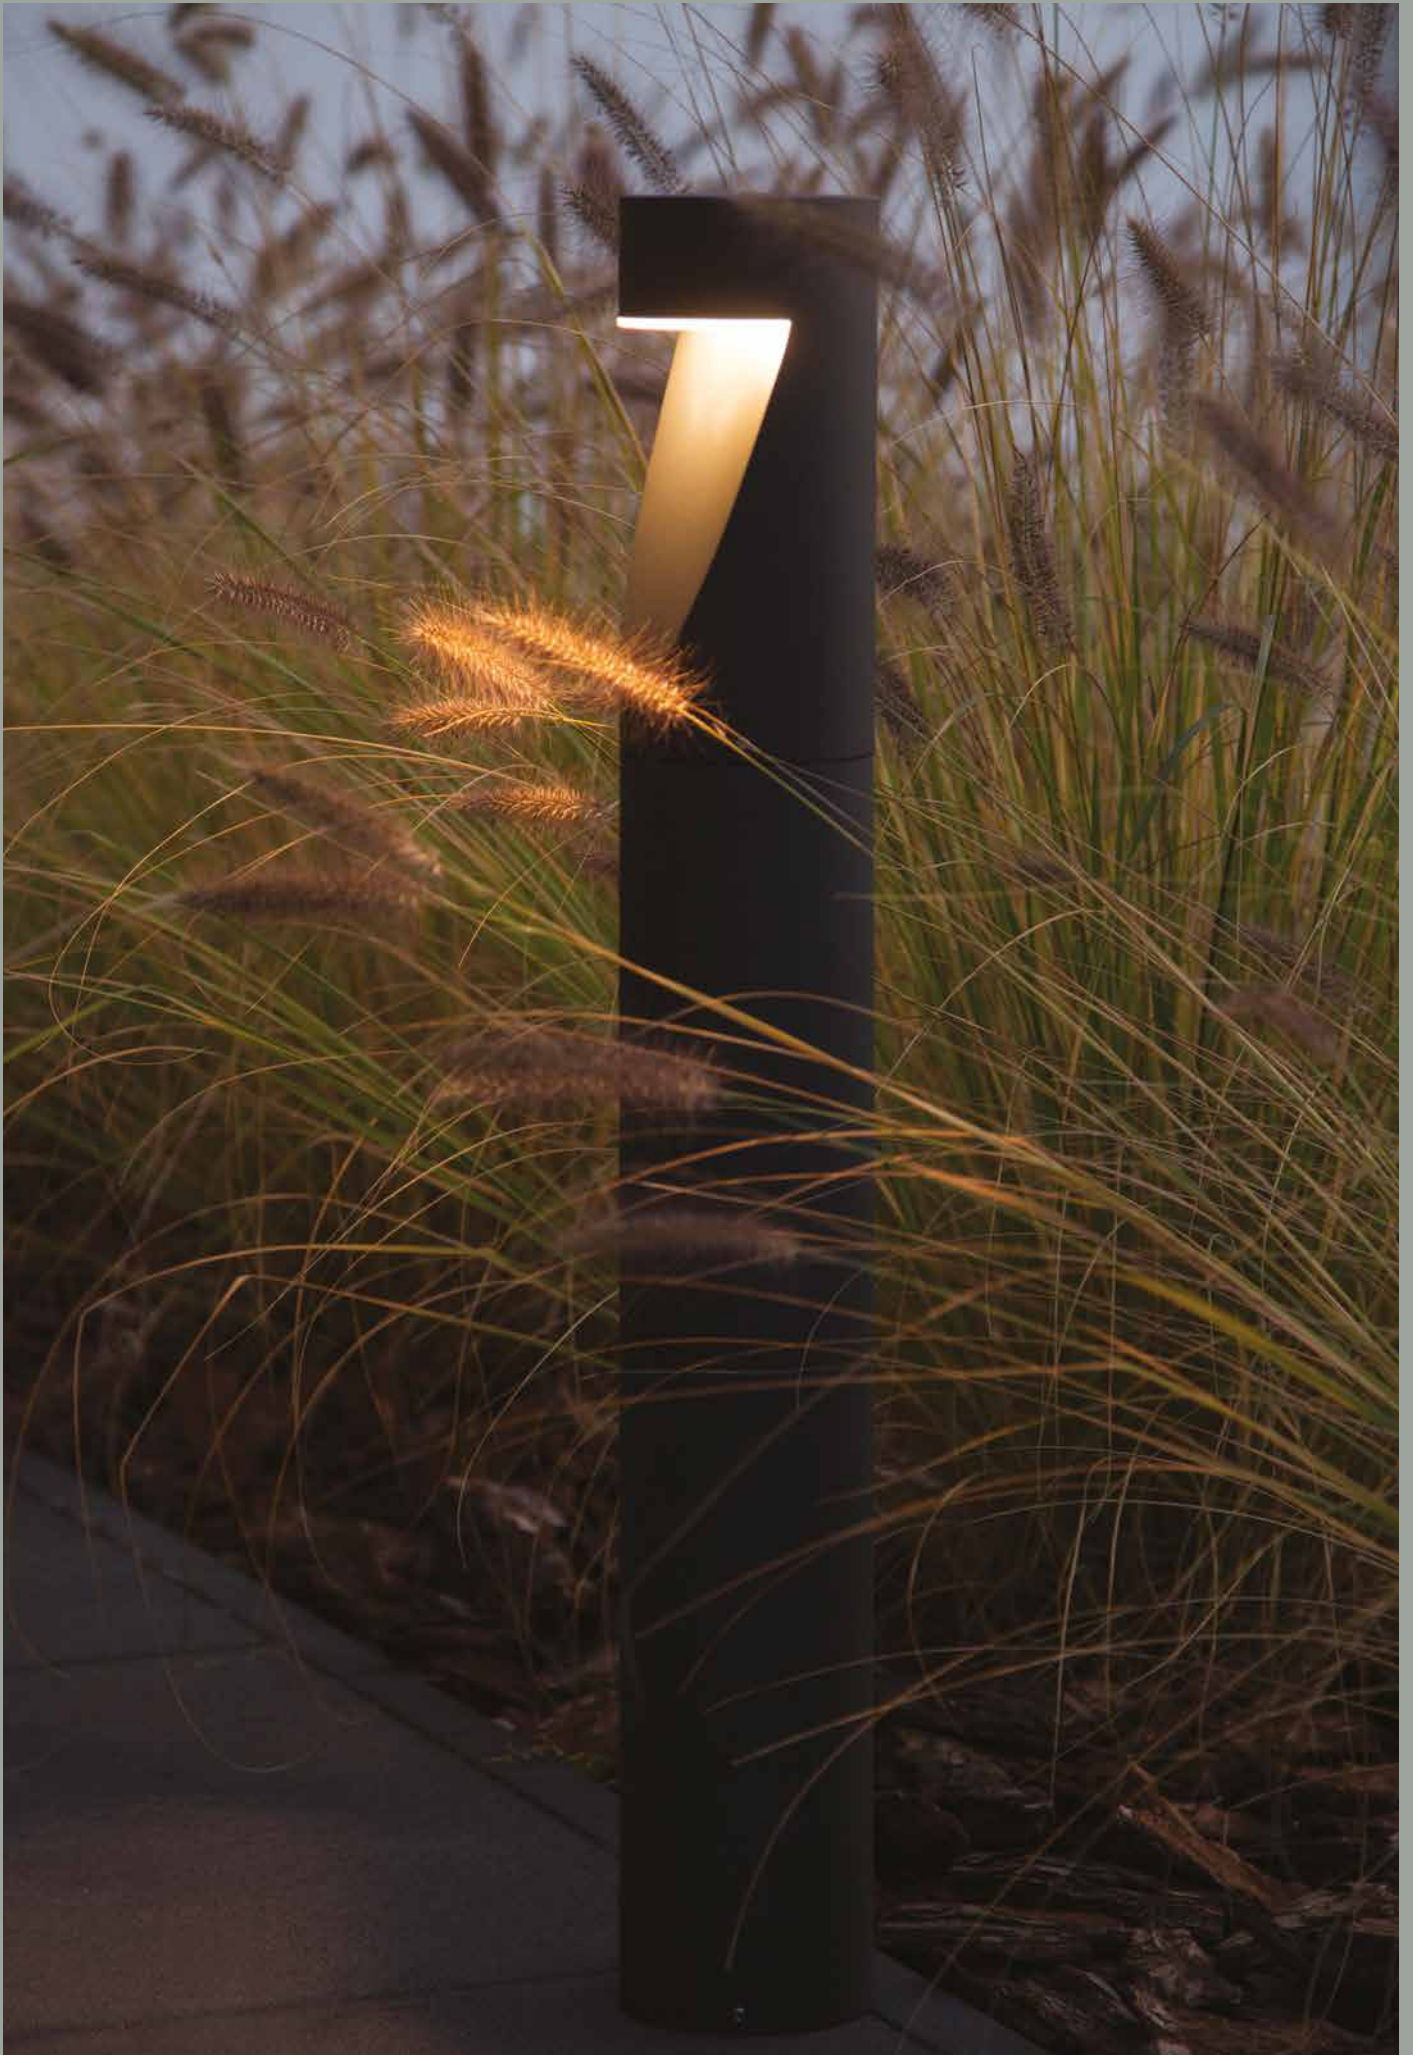

Oppland



Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205

Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1324AL	LED	8,2W	304lm	3000K	> 171 460h	DALI2
1324GR						
1321AL						
1321GR						
5123AL	LED	9,3W	313lm	4000K	> 50 000h	Dimmable
5123GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2360AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2360GR						
2361AL						
2361GR						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2364AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2364GR						
2365AL						
2365GR						

Oppland



scandinavian wood



Colour:

-  Aluminium
-  Graphite

Wood:

-  Impregnated
-  Painted

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 205


Concreting anchor



Art. 206

Anchoring support



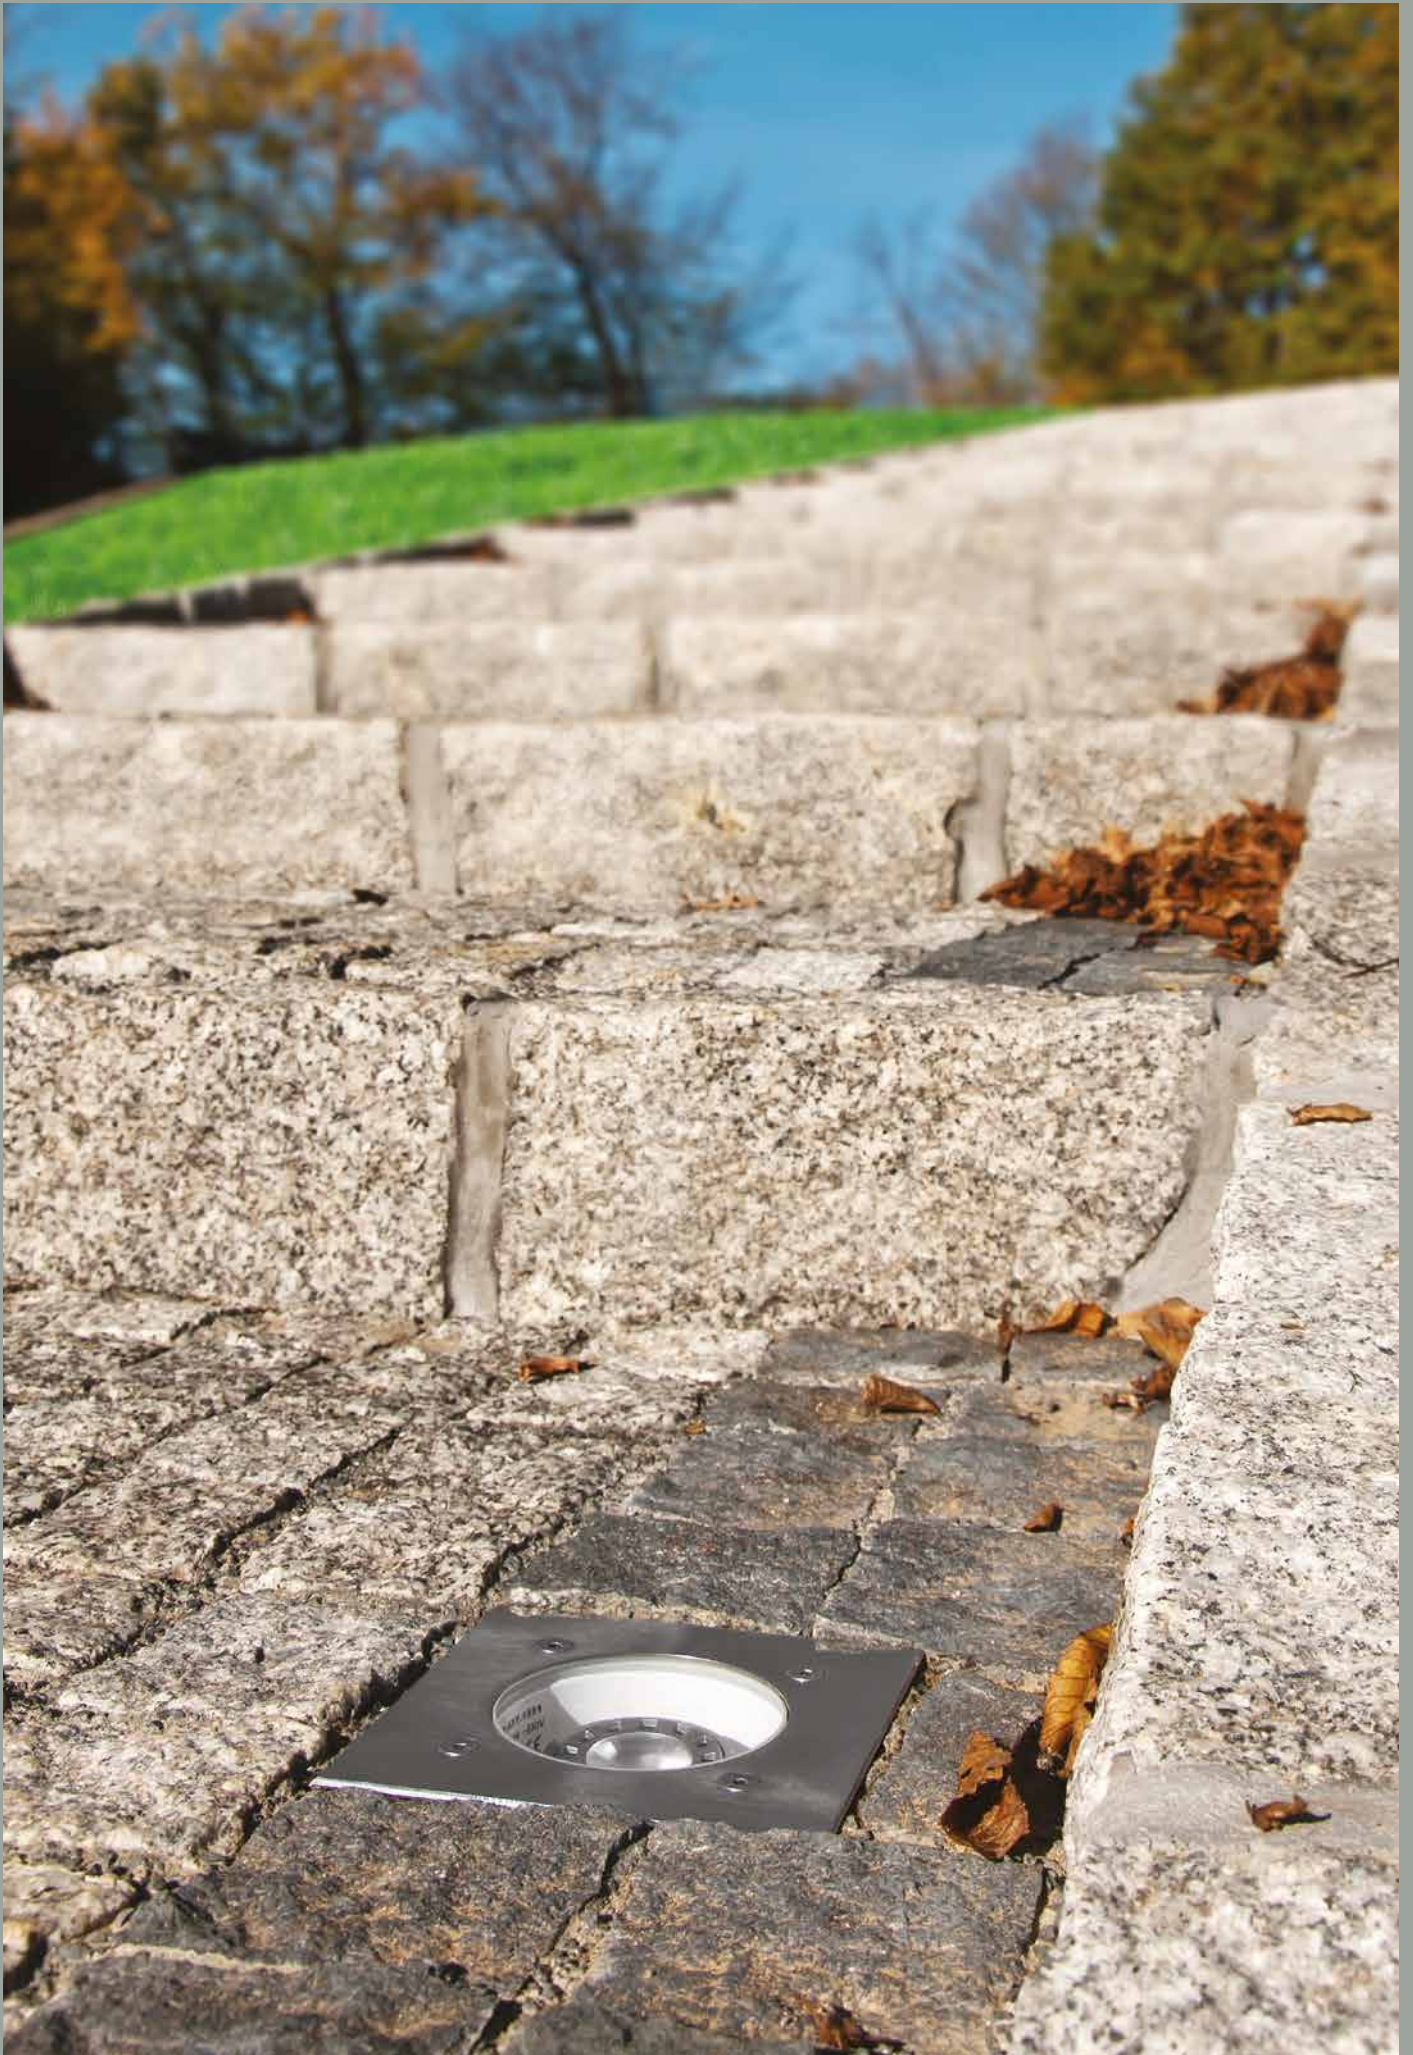

Rena




Colour:


● Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.




Multiple light variants.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 142

Ground assembly module




Art. 145

Hermetic 3-track box



Art. 146

Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1551ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1553ST		-	-	-	-	-
1762ST	LED	4W	318lm	3000K	50 000h	Dimmable
1763ST			369lm	4000K		
1766ST		8W	672lm	3000K		
1767ST			731lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1641ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1643ST		-	-	-	-	-

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1555ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1557ST		-	-	-	-	-
1752ST	LED	4W	178lm	3000K	50 000h	Dimmable
1753ST			180lm	4000K		
1756ST		8,8W	314lm	3000K		
1757ST			330lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1645ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1647ST		-	-	-	-	-

*For indexes with LED GU 10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1550ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1552ST		-	-	-		
1760ST	LED	4W	318lm	3000K	50 000h	Dimmable
1761ST			369lm	4000K		
1764ST		8W	672lm	3000K		
1765ST			731lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1640ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1642ST		-	-	-		

*For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1554ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1556ST		-	-	-		
1750ST	LED	4,2W	178lm	3000K	> 50 000h	Dimmable
1751ST		4W	180lm	4000K		
1754ST		8W	314lm	3000K		
1755ST			330lm	4000K		

*All indexes with LED module also available with 15° or 24° light angle, contact your supplier. For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1644ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1646ST		-	-	-		

For indexes with LED GU10 is possible to adjust the angle of the socket by 10°.



Rena Cover




Colour:


- Black
- Graphite

Colour temperature:

2700K* 3000K 4000K




CE	220-240V	IK10	IP68	Grounding symbol	3m
LED	GU10	Al	DIM	Adjustable beam symbol	PC




Multiple light variants.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 142
Power cord cover



Art. 145
Hermetic 3-track box



Art. 146
Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1632BL	LED GU10	-	-	-	-	-	
1632GR		-	-	-	-	-	
1633BL		5,5W	13lm	3000K	40 000	Dimmable	
1633GR		5,5W	13lm	3000K	40 000	Dimmable	
1770BL	LED	4W	24lm	3000K	50 000h	Dimmable	
1770GR			24lm	3000K			
1771BL		4W	25lm	4000K			
1771GR			25lm	4000K			
1774BL		8,7W	48lm	3000K			
1774GR				48lm			3000K
1775BL			8W	48lm			4000K
1775GR							48lm



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1630BL	LED GU10	-	-	-	-	-	
1630GR		-	-	-	-	-	
1631BL		5,5W	13lm	3000K	40 000	Dimmable	
1631GR		5,5W	13lm	3000K	40 000	Dimmable	
1768BL	LED	4W	24lm	3000K	50 000h	Dimmable	
1768GR			24lm	3000K			
1769BL		4W	28lm	4000K			
1769GR			28lm	4000K			
1772BL		8W	48lm	3000K			
1772GR				48lm			3000K
1773BL			8W	56lm			4000K
1773GR							56lm



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1650BL	LED GU10	-	-	-	-	-
1650GR		-	-	-	-	-
1651BL		5,5W	13lm	3000K	40 000	Dimmable
1651GR		5,5W	13lm	3000K	40 000	Dimmable



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1652BL	LED GU10	-	-	-	-	-
1652GR		-	-	-	-	-
1653BL		5,5W	13lm	3000K	40 000	Dimmable
1653GR		5,5W	13lm	3000K	40 000	Dimmable



Rondane



Colour:

- Aluminium
- Graphite

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
538AL	E27	-	-	-	-	-
538GR		-	-	-	-	-
537AL	LED	8,5W	305lm	3000K	> 110 000h	Dimmable
537GR						
539AL						
539GR		50 000h	-			
548AL						
548GR					Motion Detector	

*All indexes also available in 4000K and 2700K versions.



Sandvik



Colour:

- Aluminium
- Graphite
- Black
- White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 148


Corner bracket for art. 1730, 1731, 1732, 5152




Art. 131

Corner bracket for art 1740, 1741, 1742, 5153



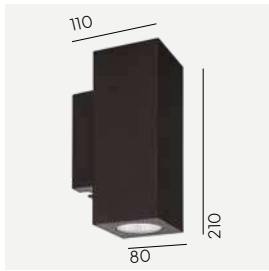

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1730AL	LED GU10	-	-	-	-	-
1730BL						
1730GR						
1730WH						
1731AL	LED	7,8W	420lm	2700K	40 000h	Dimmable
1731BL						
1731GR						
1731WH						
1732AL						
1732BL						
1732GR						
1732WH						
5152AL	LED	16W	1350lm	4000K	> 50 000	Dimmable
5152BL						
5152GR						
5152WH						
5152WH						

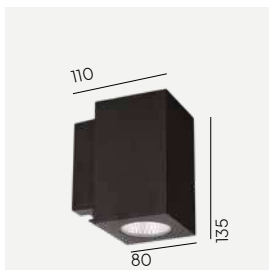

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1740AL	LED GU10	-	-	-	-	-
1740BL						
1740GR						
1740WH						
1741AL	LED	3,9W	210lm	2700K	40 000h	Dimmable
1741BL						
1741GR						
1741WH						
1742AL						
1742BL						
1742GR						
1742WH						
5153AL	LED	8W	675lm	4000K	> 50 000h	Dimmable
5153BL						
5153GR						
5153WH						
5153WH						

Sandvik



Colour:

- Aluminium
- Graphite
- Black
- White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
795AL	LED GU10	3,9W	210lm	2700K	40 000h	Dimmable
795BL						
795GR						
795WH						
796AL						
796BL						
796GR						
796WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
2937AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III	
2937BL								
2937GR								
2935AL			699lm	3000K				IESNA Type V
2935BL								
2935GR								
2939AL			604lm				4000K	
2939BL								
2939GR								
2941AL			616lm	4000K				
2941BL								
2941GR								






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	Energy distributor ~230V	
2945AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III	E(Uni)	
2945BL									
2945GR									
2943AL			699lm	3000K					IESNA Type V
2943BL									
2943GR									
2947AL			604lm				4000K		
2947BL									
2947GR									
2949AL			616lm	4000K					
2949BL									
2949GR									

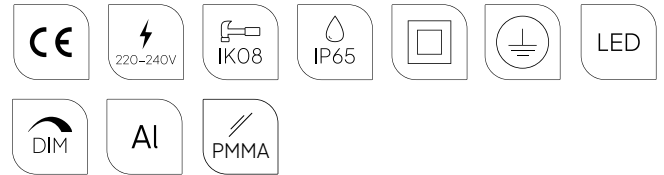
Skara



Colour:

-  Aluminium
-  Black
-  Graphite


Colour temperature:



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Sande



Colour:

- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

Accessories:


Art. 1233

Cap



Art. 1233

Ground anchor.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle	
1592BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°	
1592GR							40°	
1593BL	LED	8,6W	566lm		> 145 000h		Dimmable	36°
1593GR								40°



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Light angle	
1598BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable	36°	
1598GR							40°	
1594BL	LED	8,6W	738lm		> 145 000h		Dimmable	36°
1594GR								40°



Sol



Colour:

-  Aluminium
-  Graphite
-  Black
-  White

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:

Art. 3095

Distance





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4051AL	LED	19,1W	2101lm	3000K	> 100 000h	Dimmable
4051BL						
4051GR						
4051WH						
4052AL			2421lm	4000K		
4052BL						
4052GR						
4052WH						
4055AL			2101lm	3000K		DALI2
4055BL						
4055GR						
4055WH						
4056AL			2421lm	4000K		
4056BL						
4056GR						
4056WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4053AL	LED	19,3W	1655lm	3000K	> 100 000h	Dimmable
4053BL						
4053GR						
4053WH						
4054AL			1905lm	4000K		
4054BL						
4054GR						
4054WH						
4057AL			1663lm	3000K		DALI2
4057BL						
4057GR						
4057WH						
4058AL			1912lm	4000K		
4058BL						
4058GR						
4058WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4043AL	LED	19,3W	1938lm	3000K	> 100 000h	Dimmable
4043BL						
4043GR						
4043WH						
4044AL						
4044BL						
4044GR		2221lm	4000K			
4044WH						
4047AL		19,1W	1924lm	3000K	> 100 000h	DALI2
4047BL						
4047GR						
4047WH						
4048AL						
4048BL						
4048GR		2227lm	4000K			
4048WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
4045AL	LED	19,3W	1633lm	3000K	> 100 000h	Dimmable		
4045BL								
4045GR								
4045WH								
4046AL		19,1W	1890lm	4000K			> 100 000h	DALI2
4046BL								
4046GR								
4046WH								
4049AL		19,3W	1618lm	3000K	> 100 000h	DALI2		
4049BL								
4049GR								
4049WH								
4050AL		19,1W	1866lm	4000K			> 100 000h	DALI2
4050BL								
4050GR								
4050WH								

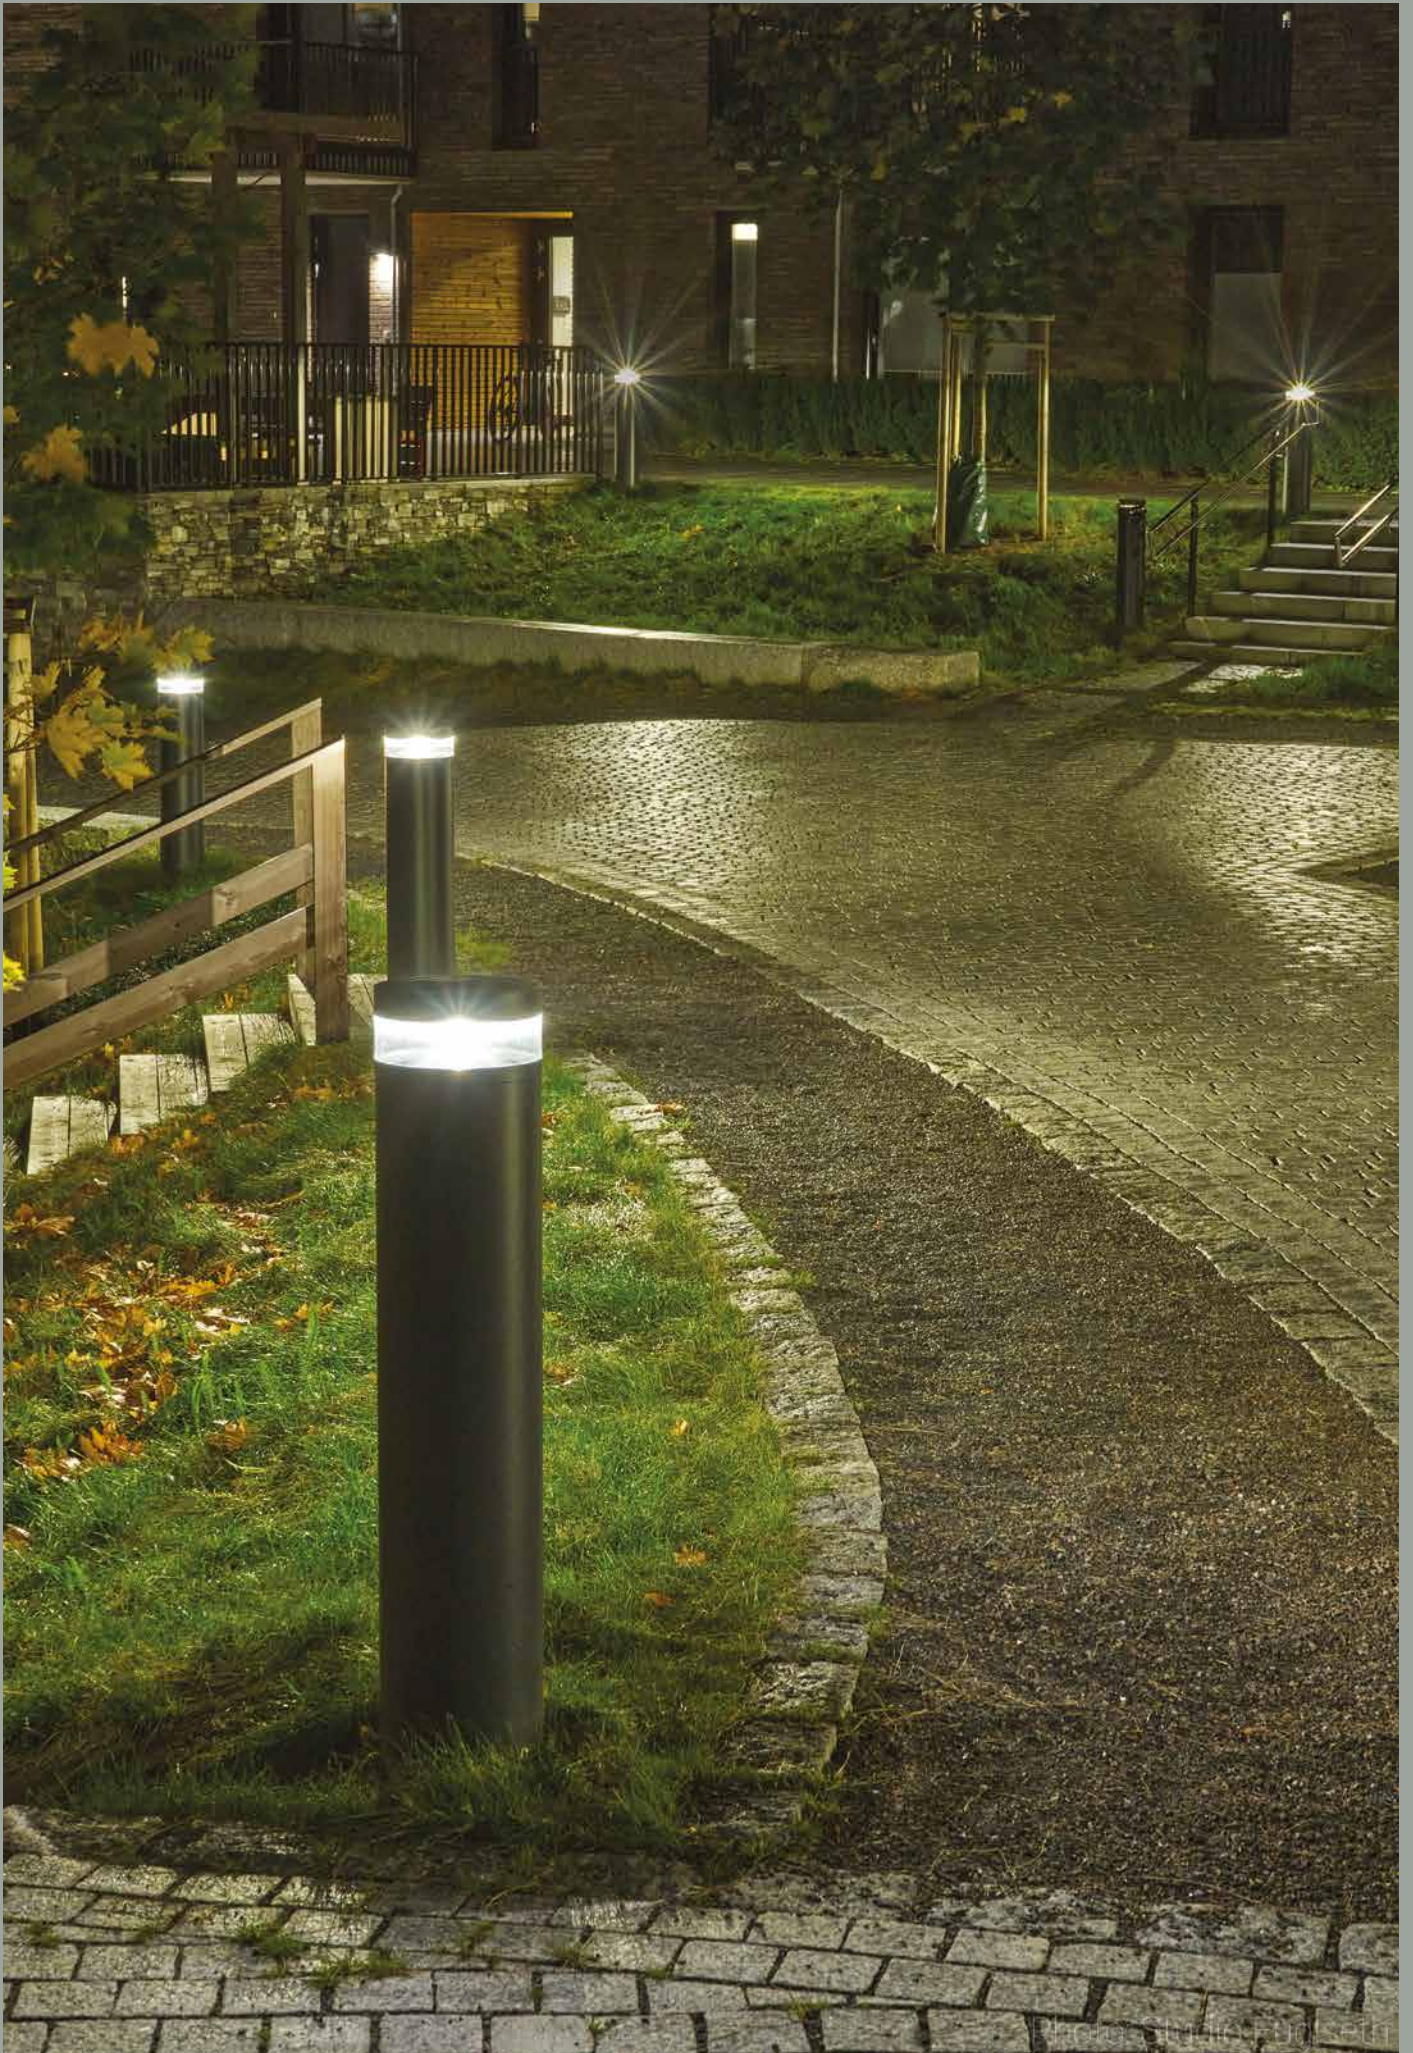

Stavanger



Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Accessories:


Art. 1230

Concreting anchor




Art. 1231

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1240AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1240GR							
5008AL			493lm	4000k	50 000h		DALI2/ NightDim
5008GR							
5060AL			428lm	3000K	> 145 000h		
5060GR							
5063AL							
5063GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1243AL	E27	-	-	-	-	-	I
1243GR							
2240AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2240GR							
2241AL			565lm	4000K			
2241GR							





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1244AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1244GR							
5009AL		11,9W	530lm	4000k	50 000h		DALI2/ NightDim
5009GR							
5061AL		12,2W	493lm	3000K	> 145 000h		
5061GR							
5064AL							
5064GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1246AL	E27	-	-	-	-	-	I
1246GR							
2244AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2244GR							
2245AL			565lm	4000K			
2245GR							

Bollard

Modern



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1247AL	LED	8,4W	312lm	3000K	> 145 000h	Dimmable
1247GR						
5010AL						
5010GR						
5062AL		8,5W	351lm	4000k	50 000h	DALI
5062GR						
5065AL		8,4W	400lm	3000K	> 145 000h	
5065GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1248AL	E27	-	-	-	-	-	I
1248GR							
2248AL	LED	8,9W	337lm	3000K	> 72 000h	Dimmable	II
2248GR							
2249AL			403lm	4000K			
2249GR							





Voss

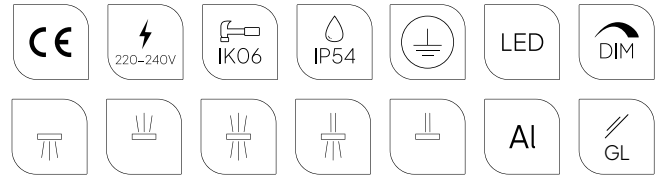

Colour:



Aluminium



Graphite

Colour temperature:

2700K* 3000K


4000K




*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.





Multiple light variants.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1951AL	LED	10,8W	557lm	3000K	> 171 460	Dimmable
1951GR						
5034AL		16,8W	610lm	4000K	50 000	
5034GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1955AL	LED	10,5W	557lm	3000K	> 102 000h	Dimmable
1955GR						
5036AL		10,5W	557lm	4000K	50 000	
5036GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1950AL	LED	15,4W	614lm	3000K	50 000h	-
1950GR						
5032AL		16,9W	655lm	4000K	> 102 000h	
5032GR						

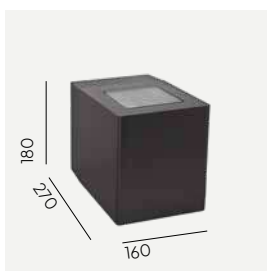

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1952AL	LED	21W	1115lm	3000K	> 102 000h	-
1952GR			1077lm			
5033AL			1077lm	4000K		
5033GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1953AL	LED	6,4W	55,7lm	3000K	> 102.000h	-
1953GR						
5128AL			55lm	4000K		Dimmable
5128GR						





Vasa



Colour:

-  Aluminium
-  Graphite
-  Black
-  White

Colour temperature:


2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
120AL	E27	-	-	-	-	-
120BL						
120GR						
120WH						
127AL	LEDE27	8W	384lm	2700K	25 000h	-
127BL						
127GR						
127WH						
128AL	LED	8,5W	631lm	3000K	> 72 000h	Dimmable
128BL						
128GR						
128WH						
5019AL	LED	8,3W	668lm	4000K	> 70 000h	-
5019BL						
5019GR						
5019WH						
5093AL	LED	9,7W	670lm	3000K	> 70 000h	DALI2
5093BL						
5093GR						
5093WH						
5092AL	LED	14,1W	1039lm	4000K	> 70 000h	-
5092BL						
5092GR						
5092WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
450AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
450BL						
450GR						
450WH						
451AL	LED	6W	457lm	4000K	> 102 000h	-
451BL						
451GR						
451WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
454AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
454BL						
454GR						
454WH						
455AL	LED	6W	457lm	4000K	> 102 000h	-
455BL						
455GR						
455WH						


Visby

The city needs light of the right quality and in the right quantity. It needs balance.

The Visby model can be an excellent choice here.

Visby is a modernist pole lamp, economical thanks to the LED modules, but also with an excellent ratio of energy consumption to lighting capacity. It is ideal for illuminating streets, built-up areas, parks and squares, where it creates practical yet beautiful lighting. This is complemented by an innovative ring bracket system at the height of the light source and a plane reflection system, which optimally reduces glare and creates a harmonious light beam.



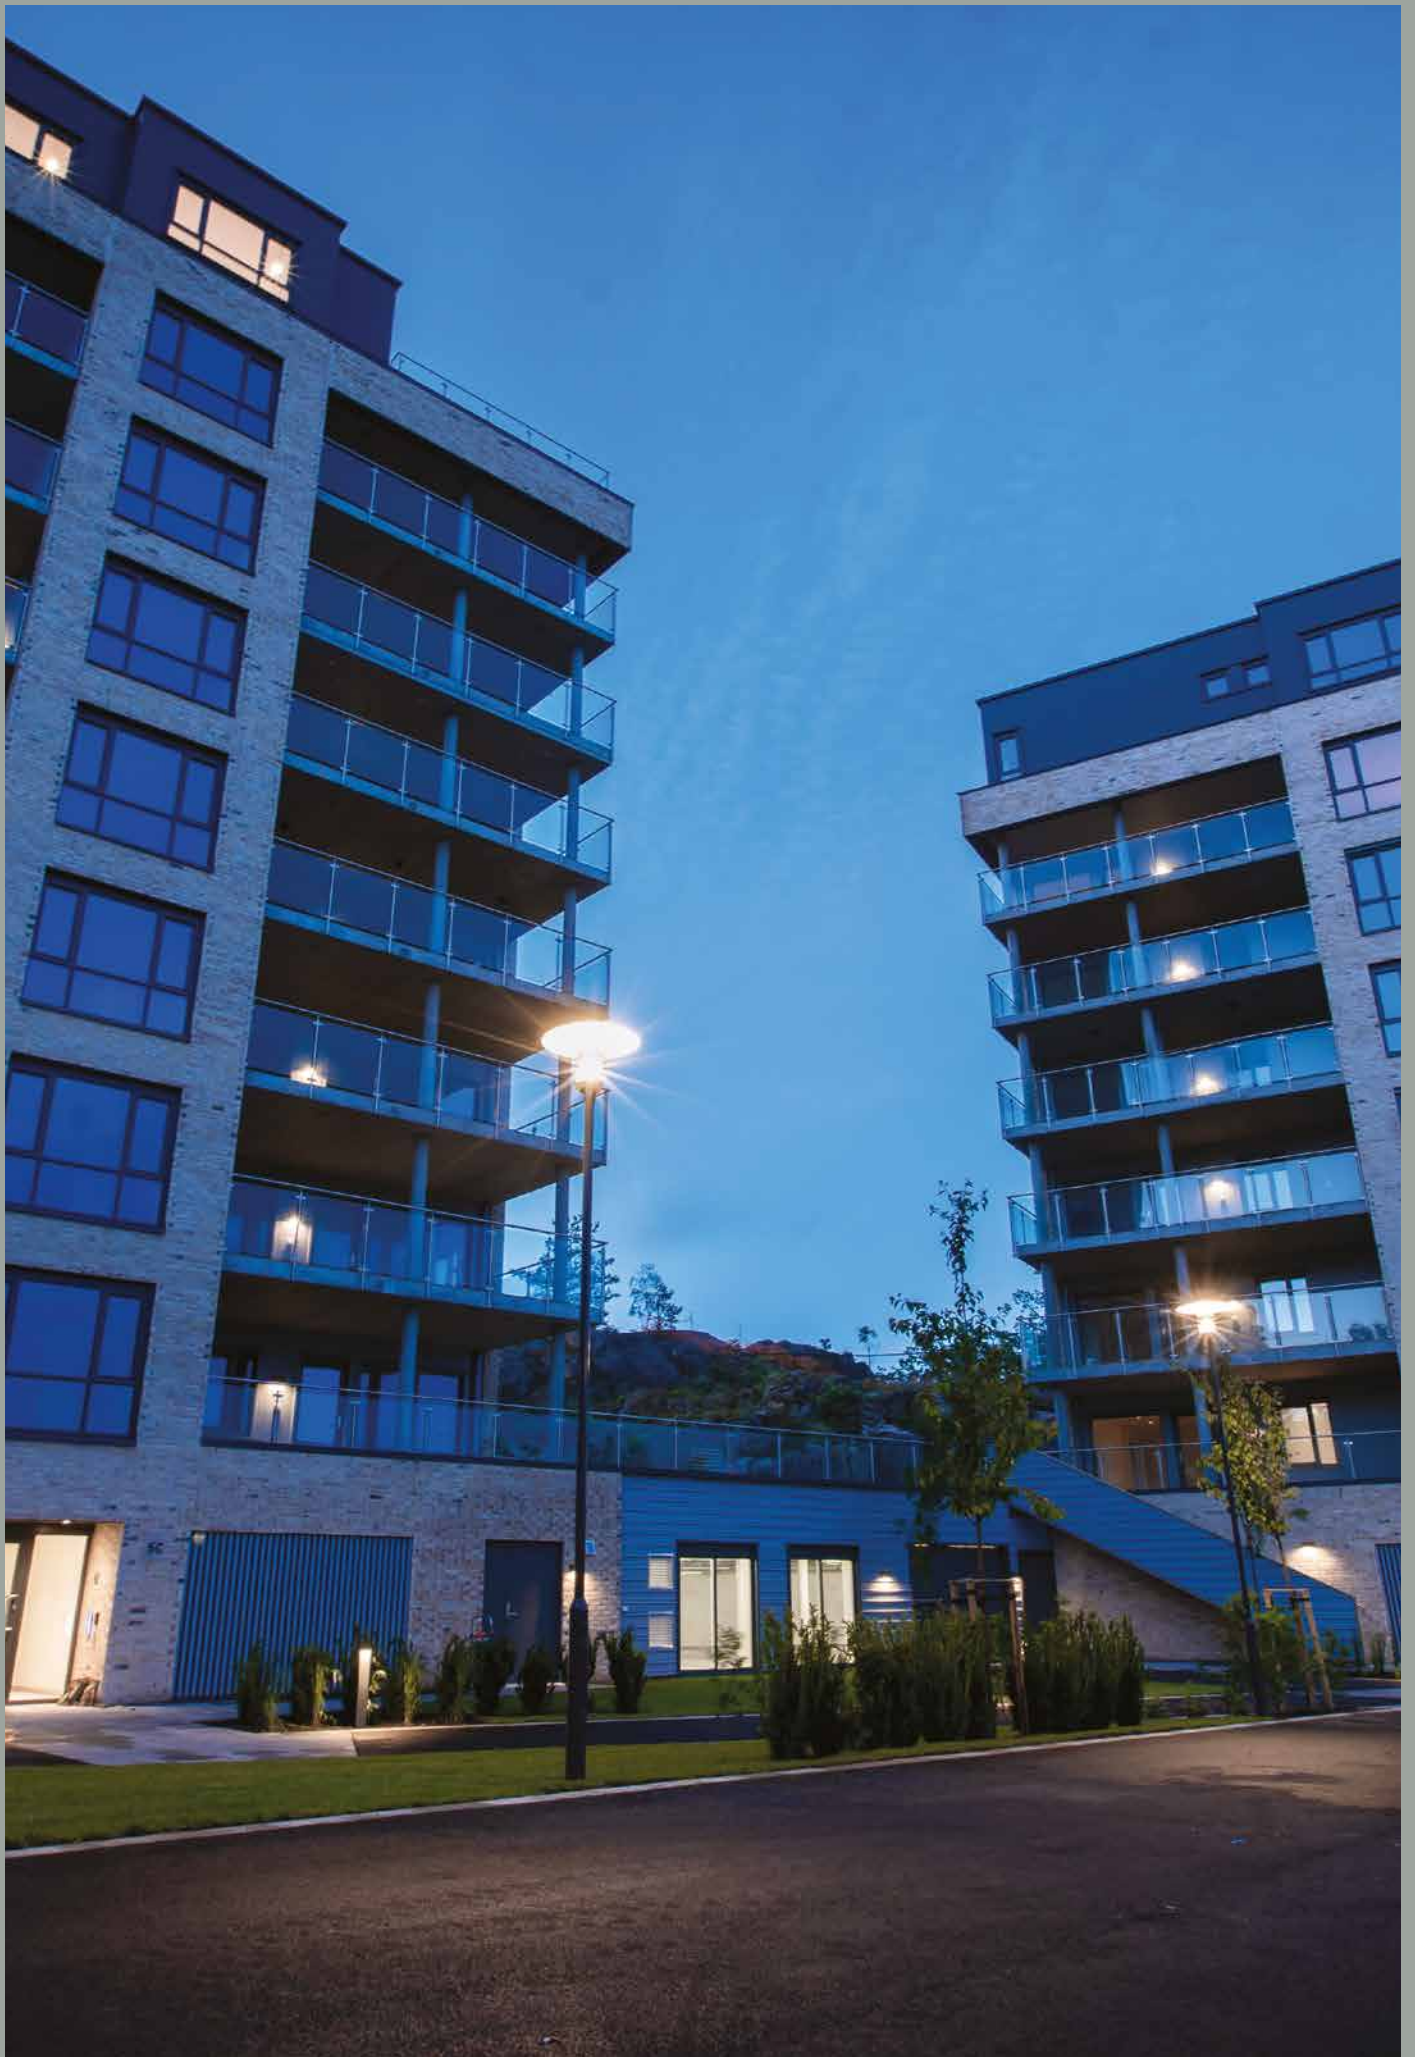

Visby



Visby mounted on pole 3004, further information on pages 417-418.

CE	220-240V	IK05	IP65	Grounding symbol
LED	Al	PMMA	4,5M	60



Colour:

- Aluminium
- Graphite

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:

Luminaires sold separately, recommended poles ø60, further information on pages 417- 418.

Art. 7660

Reduction for ø60 luminaires for mounting on the ø76 pole.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
577AL	LED	27W	1388lm	3000K	50 000h
577GR					
576AL		44,5W	2465lm		
576GR					
5003AL		26,5W	1553lm	4000K	
5003GR					
5002AL		43,6W	2624lm		
5002GR					



Varberg

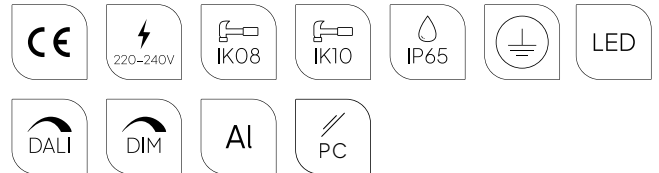

Colour:


- Aluminium
- Graphite
- Black

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.



Multiple light variants.



Fully replaceable electrical kit.



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
7150AL	LED	30W	3621lm	4000K	>100 000h	DALI2/ NightDim	IESNA type IV
7150BL							
7150GR			3843lm	3000K			
7151AL							
7151BL							
7151GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
7152AL	LED	7,7W	741lm	4000K	>109 000h	Dimmable	IESNA type IV
7152BL							
7152GR							
7153AL		7,8W	742lm	4000K			
7153BL							
7153GR							
7154AL		7,7W	759lm	3000K			
7154BL							
7154GR							
7155AL		7,8W	760lm			3000K	
7155BL							
7155GR							

Torp



Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Art	Type of light source
1396BL	E27



Trysil


Thoroughly futuristic, ahead of its time but elegant. Whatever your needs, Trysil is the perfect choice for those who wish to combine modernity with reliability and exceptional style. Trysil is available in bollard and pole versions. It offers a range of state-of-the-art light sources and controls, adapted to the needs of the most demanding users.

Trysil family means quality, design and functionality.





Trysil

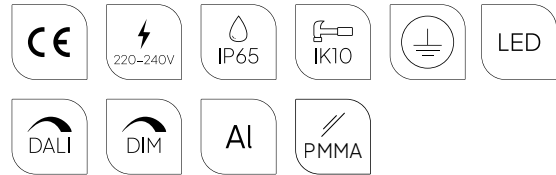

Colour:


- Aluminium
- Graphite
- Black

Colour temperature:

- 2700K*
 - 3000K
 - 4000K
- ● ○
- *2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

Accessories:


Art. 1907

Concreting anchor




Art. 1908

Anchoring support




Art. 1909



Art. 3081

Special foot






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1097AL	LED	7,3W	647lm	4000K	> 171 460h	Dimmable	
1097BL							
1097GR							
1096AL							
1096BL							
1096GR							
1108AL		9,5W	660lm	3000K	> 102 000h		
1108BL							
1108GR							
1109AL			700lm	4000K			50 000h
1109BL							
1109GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1101AL	LED	7,4W	694lm	4000K	> 109 000h	Dimmable	IESNA type V	
1101BL								
1101GR								
1100AL			8W	703lm				3000K
1100BL								
1100GR								
1102AL		689lm		4000K		DALI2		
1102BL								
1102GR								
1103AL		8W	674lm	3000K				
1103BL								
1103GR								
1105AL	7,4W		706lm	4000K	Dimmable			
1105BL								
1105GR								
1104AL		7,5W	738lm	3000K				
1104BL								
1104GR								
1106AL	8W	707lm	3000K	DALI2				
1106BL								
1106GR								
1107AL		693lm	4000K					
1107BL								
1107GR								

Trysil

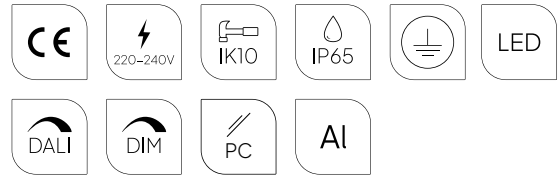

Colour:

- Aluminium
- Black
- Graphite


Colour temperature:

2700K* 3000K 4000K

*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Product Eco-friendly.

Accessories:

Art. 3091





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1048AL	LED	12,5W	1260lm	3000K	> 72 000h	Dimmable
1048BL						
1048GR						
1049AL						
1049BL						
1049GR						
1050AL		20W	> 102 000h	DALI2/ NightDim		
1050BL						
1050GR						
1051AL						
1051BL						
1051GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1055AL	LED	8,7W	1141lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1055BL							
1055GR							
1054AL		8,4W	1081lm	3000K			
1054BL							
1054GR							
1058AL		8,6W	1111lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III
1058BL							
1058GR							
1059AL		8,7W	1161lm	4000K			
1059BL							
1059GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1001AL	LED	25W	2476lm	4000K	> 102 000h	Dimmable
1001BL						
1001GR						
1000AL			2433lm	3000K		
1000BL						
1000GR						
1002AL		40W	3901lm	3000K	> 102 000h	DALI2
1002BL						
1002GR						
1003AL			4145lm	4000K		
1003BL						
1003GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1007AL	LED	16,3W	2377lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1007BL							
1007GR							
1006AL							
1006BL							
1006GR							
1010AL		2282lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III	
1010BL							
1010GR							
1011AL		2216lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III	
1011BL							
1011GR							
1011BL	2293lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type II/III		
1011GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1060AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1060BL						
1060GR						
1061AL						
1061BL						
1061GR						
1062AL		1719lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim
1062BL						
1062GR						
1063AL		1973lm	3000k	> 102 000h	DALI2/ NightDim	DALI2/ NightDim
1063BL						
1063GR						
1063GR	2054lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim	
1063GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1012AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable		
1012BL								
1012GR								
1013AL		33W	3448lm	4000K			> 102 000h	DALI2/ NightDim
1013BL								
1013GR								
1014AL		3901lm	3000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim		
1014BL								
1014GR		4145lm	4000K	> 102 000h	DALI2/ NightDim	DALI2/ NightDim		
1015AL								
1015BL								
1015GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1067AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1067BL							
1067GR							
1066AL							
1066BL							
1066GR							
1070AL			1594lm	3000K			IESNA type II/III
1070BL							
1070GR							
1071AL			1667lm	4000K			
1071BL							
1071GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1019AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1019BL							
1019GR							
1018AL							
1018BL							
1018GR			3194lm	3000K			IESNA type II/III
1022AL							
1022BL							
1022GR							
1023AL			3308lm	4000K			
1023BL							
1023GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1072AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1072BL						
1072GR						
1073AL			1719lm	4000K		
1073BL						
1073GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1024AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable
1024BL						
1024GR						
1025AL						
1025BL						
1025GR						
1026AL		40W	3901lm	3000K		DALI2/ NightDim
1026BL						
1026GR						
1027AL						
1027BL						
1027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1079AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1079BL								
1079GR								
1078AL								
1078BL								
1078GR								
1082AL			1594lm	3000K			DALI2/ NightDim	IESNA type II/III
1082BL								
1082GR								
1083AL								
1083BL								
1083GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1031AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1031BL								
1031GR								
1030AL								
1030BL								
1030GR								
1034AL			3194lm	3000K			DALI2/ NightDim	IESNA type II/III
1034BL								
1034GR								
1035AL								
1035BL								
1035GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1084AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable		
1084BL				4000K				
1084GR			20W	1719lm			3000K	DALI2/ NightDim
1085AL							4000K	
1085BL				1973lm			3000K	
1085GR							4000K	
1086AL		20W	1973lm	3000K		> 102 000h	DALI2/ NightDim	
1086BL				4000K				
1086GR				3000K				
1087AL			1973lm	4000K				
1087BL				3000K				
1087GR				4000K				



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens						
1091AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V						
1091BL				3000K									
1091GR				4000K									
1090AL			1638lm	3000K				> 100 000h	DALI2/ NightDim	IESNA type II/III			
1090BL											4000K		
1090GR											3000K		
1094AL			1594lm	3000K			> 100 000h				DALI2/ NightDim	IESNA type II/III	
1094BL													4000K
1094GR													3000K
1095AL			1667lm	4000K				> 100 000h	DALI2/ NightDim	IESNA type II/III			
1095BL													3000K
1095GR													4000K



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1037AL	LED	34W	3448lm	4000K	> 102 000h	Dimmable	
1037BL							
1037GR							
1036AL			3347lm				
1036BL							
1036GR							
1038AL		40W	3901lm	3000K		> 102 000h	DALI2
1038BL							
1038GR							
1039AL			4145lm	4000K			
1039BL							
1039GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens		
1043AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V		
1043BL									
1043GR			3277lm						
1042AL									
1042BL									
1042GR									
1046AL			3194lm	3000K			> 100 000h	DALI2/ NightDim	IESNA type II/III
1046BL									
1046GR			3308lm	4000K					
1047AL									
1047BL									
1047GR									



Bergen



Colour:




Black



Galvanized



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Corner bracket



Art. 159

Spacer





Art	Type of light source
270BL	E27
270GA	E27



Art	Type of light source
271BL	E27
271GA	E27



Bergen



Colour:




Black




Galvanized



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

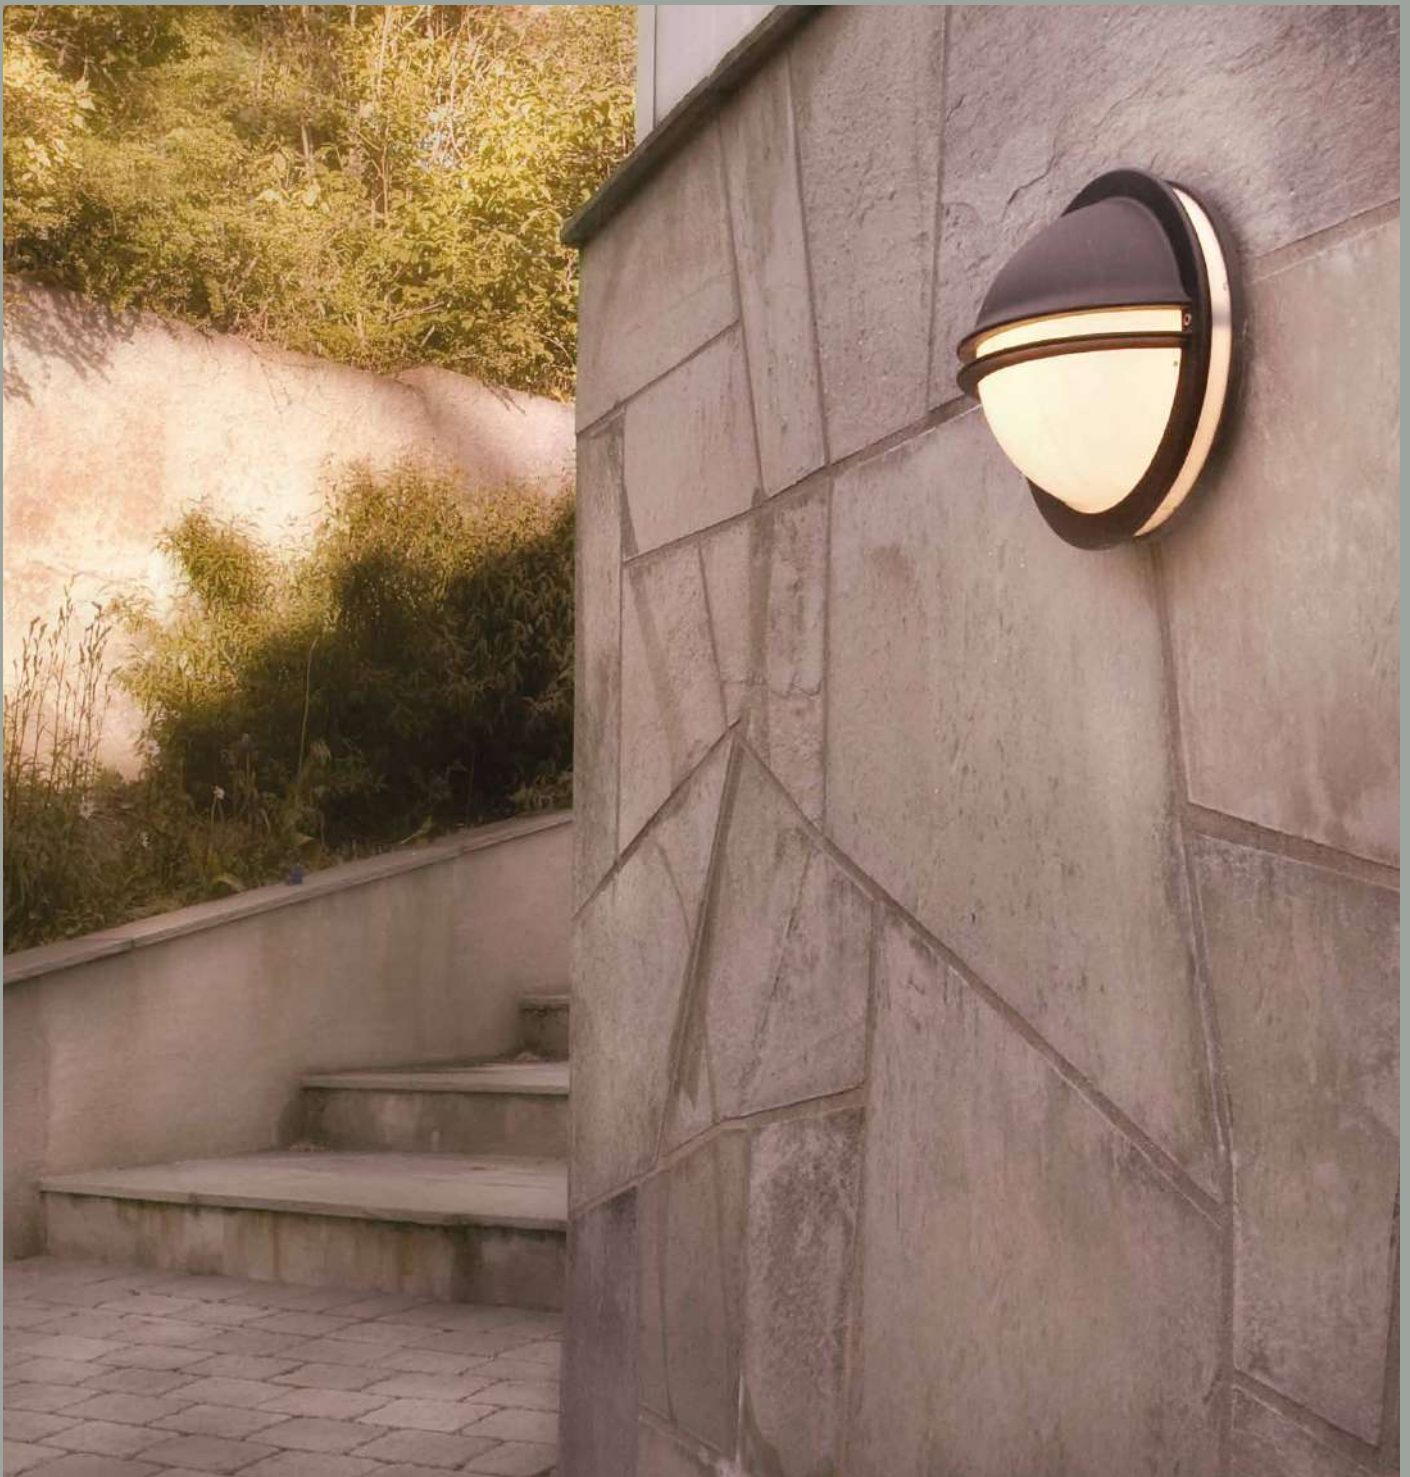

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
611BL	E27	-	-	-	-	-
611WH		-	-	-	-	-
615BL	LED E27	LED max 9W	240lm	2700K	25 000h	Dimmable
615WH						
617BL	LED	8W	185lm	3000K	50 000h	
617WH						
618BL	LED	10W	-	3000K	50 000h	-
618WH						

Berlin



Colour:

Black

White

Colour temperature:


2700K* 3000K 4000K



*2700K on request only, contact your supplier.




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




270

Art	Type of light source
610BL	E27
610WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
631BL	E27	-	-	-	-	-
631GA		-	-	-	-	-
637BL	LED	8W	364lm	3000K	50 000h	Dimmable
637GA			532lm			
638BL		10W	532lm			
638GA						

Bremen

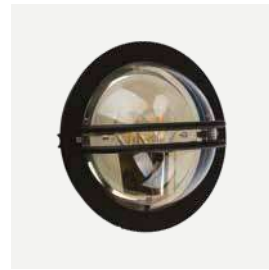

Colour:

Black

Galvanized

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




270

Art	Type of light source
630BL	E27
630GA	



Photo: Studio Fulgseth

Lofoten

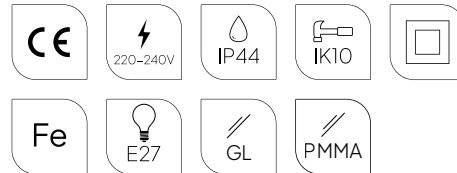

Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1940BL	E27



Art	Type of light source
1960BL	E27



Lofoten

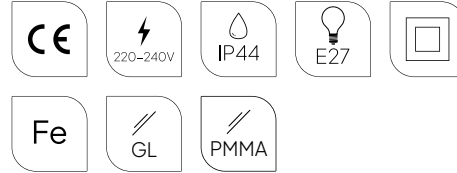

Colour:



Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.





Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 155

Corner bracket





Art	Type of light source
1939BL	E27



Art	Type of light source
1949BL	E27



Art	Type of light source
1963BL	E27



Art	Type of light source
1969BL	E27



Lofoten




Colour:
● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art 1944BL | Type of light source E27



Art 1945BL | Type of light source E27

Lofoten

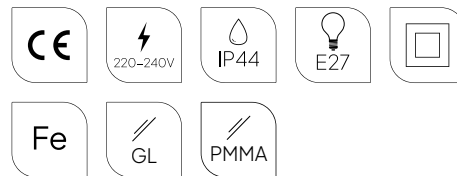

Colour:

● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art 1942BL | Type of light source E27



Art 1962BL | Type of light source E27



Lofoten

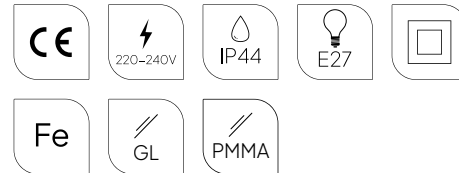

Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
1941BL	E27



Art	Type of light source
1961BL	E27



Lofoten

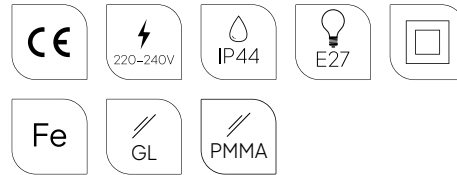

Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1946BL	E27



Art	Type of light source
1966BL	E27



Art	Type of light source
1948BL	E27




Art	Type of light source
1947BL	E27



Art	Type of light source
1968BL	E27

Lofoten

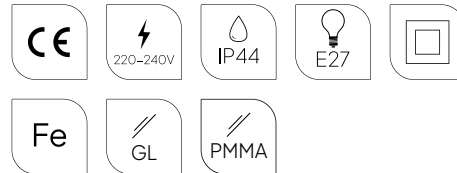

Colour:
● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 405

Concreting anchor



Art. 406

Ground anchor






Art	Type of light source
690BL	E27
690GA	E27



Larvik

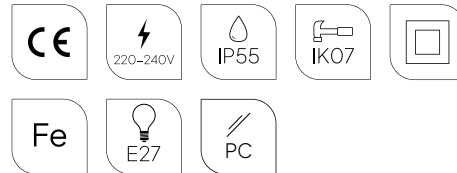

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Mounting corner



Art. 159


Luminaire mounting distance





Art	Type of light source
240BL	E27
240GA	E27

Oslo

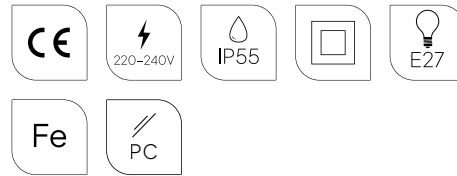

Colour:



Black




Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Mounting corner




Art. 159

Luminaire mounting distance





Oslo

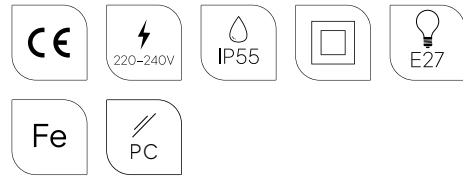

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.





Double corrosion protection (galvanising+powder coating).



Art	Type of light source
245BL	E27
245GA	



Oslo



Colour:

- Black
- Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 405


Concreting anchor.



Art. 406

Ground anchor.




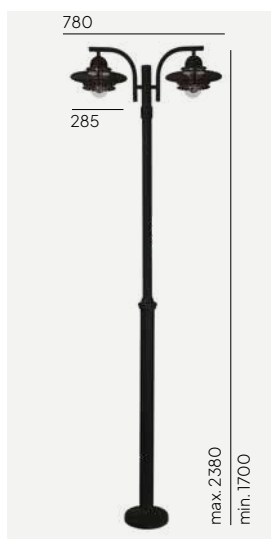

Art	Type of light source
242BL	E27
242GA	



Oslo

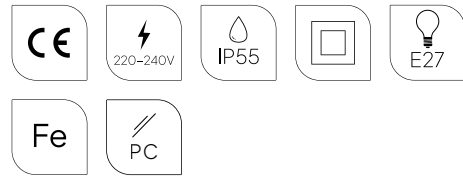

Colour:



Black



Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
240A/BL	E27
240A/GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
220BL	E27	-	-	-	-	-
220GA		-	-	-	-	-
1600BL	LED	8W	240lm	3000K	50 000h	Dimmable
1600GA						
5110BL		8W	250lm	4000K		
5110GA						

Stockholm

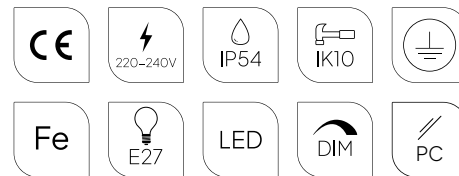

Colour:

- Black
- Galvanized

Colour temperature:

- 2700K*
- 3000K
- 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
226BL	E27
226GA	E27




Stockholm & Stockholm Big



Colour:

- Black
- Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 153

Corner bracket



Art. 159

Spacer






Art	Type of light source
286BL	E27
286GA	



Art	Type of light source
280BL	E27
280GA	



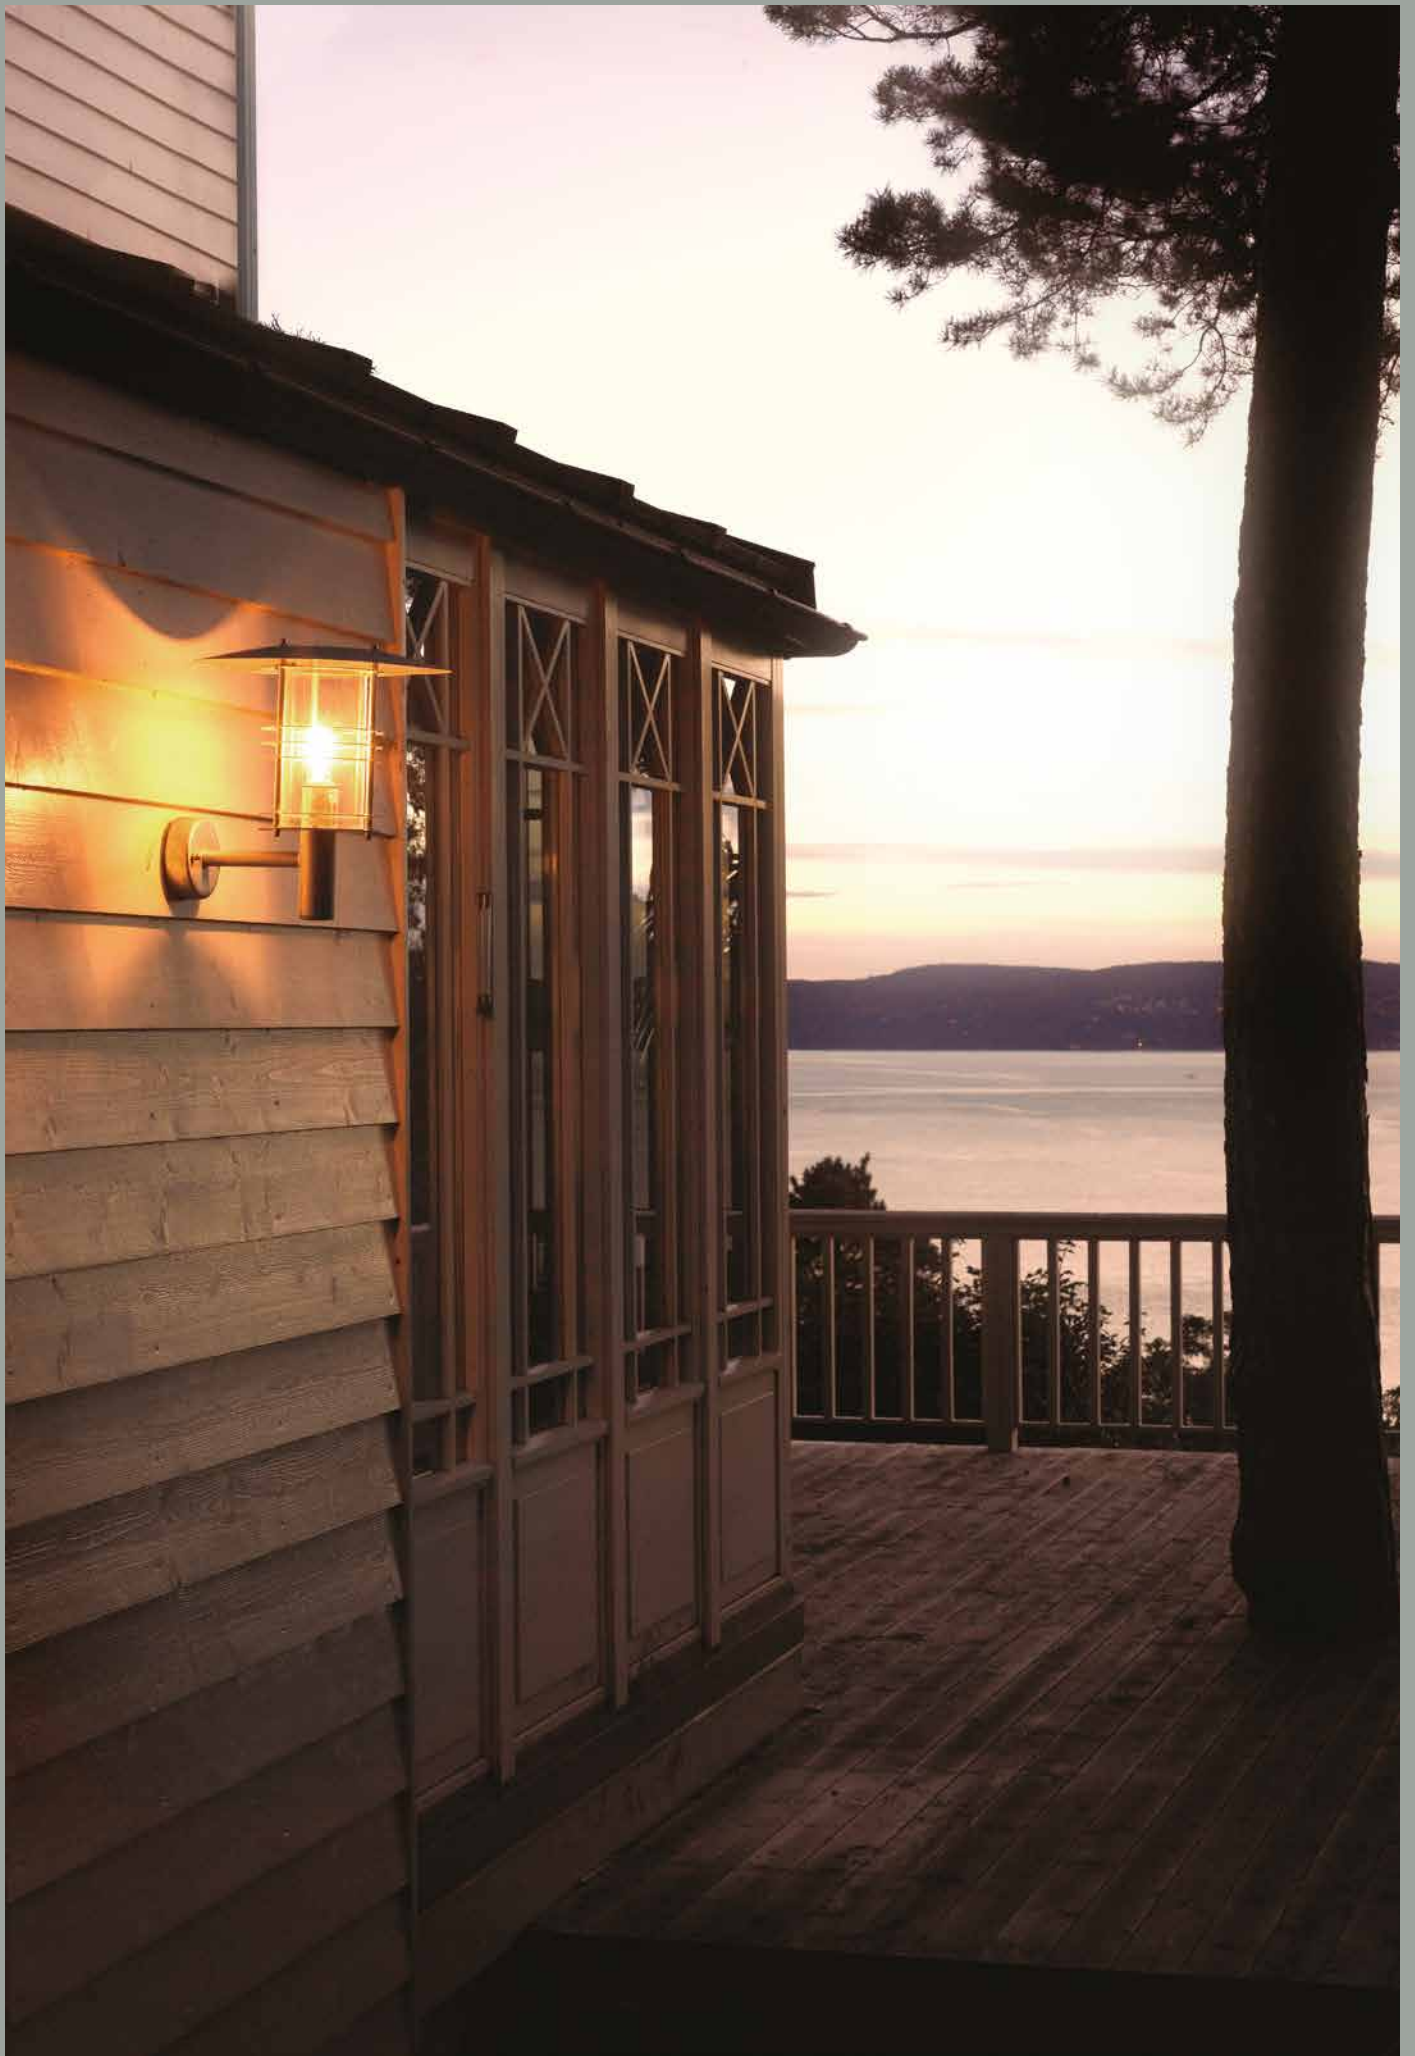



Stockholm



Colour:

- Black
- Galvanized

Colour temperature:


- 2700K*
- 3000K
- 4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor.



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
288BL	E27	-	-	-	-	-
288GA						
1464BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable
1464GA						
1265BL	LED	8,5W	342lm	3000K	50 000h	
1265GA						
1604BL						
1604GA	10,5W	432lm	4000K	>50 000h	DALI	
1605BL						
1605GA						



Art	Type of light source
297BL	E27
297GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
289BL	E27	-	-	-	-	-
289GA						
1469BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable
1469GA						
1260BL	LED	8,5W	342lm	3000K	> 50 000h	
1260GA						
1606BL						
1606GA	10,5W	453lm	4000K	> 50 000h	DALI	
1603BL						
1603GA						
1602BL	432lm	3000K	-	-	-	
1602GA						



Art	Type of light source
298BL	E27
298GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
299BL	E27	-	-	-	-	-	II
299GA							
1269BL	LEDE27	5,9W	100lm	2700K	25 000h	Dimmable	
1269GA							
1268BL	LED	10W	333lm	3000K	50 000h	I	
1268GA							





Stockholm

scandinavian wood



- CE
- 220-240V
- IP65
- IK10
- E27
- LED
- Fe
- Wood texture icon
- DIM
- PMMA



Colour:

- Black
- Galvanized

Wood:

- Impregnated
- Painted

Colour temperature:

2700K* 3000K 4000K


*2700K on request only, contact your supplier.




Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 205

Concreting anchor.



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1423BL	E27	-	-	-	-	-
1423GA						
1426BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1426GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1433BL	E27	-	-	-	-	-
1433GA						
1436BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1436GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1420BL	E27	-	-	-	-	-
1420GA						
1429BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1429GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1430BL	E27	-	-	-	-	-
1430GA						
1439BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1439GA						





Stockholm & Stockholm Big



Colour:

● Black

● Galvanized




Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

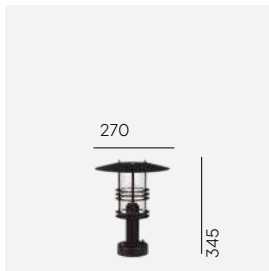

Art	Type of light source
284BL	E27
284GA	




Art	Type of light source
285BL	E27
285GA	

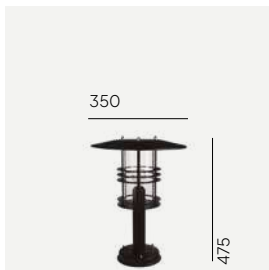


Art	Type of light source
287BL	E27
287GA	



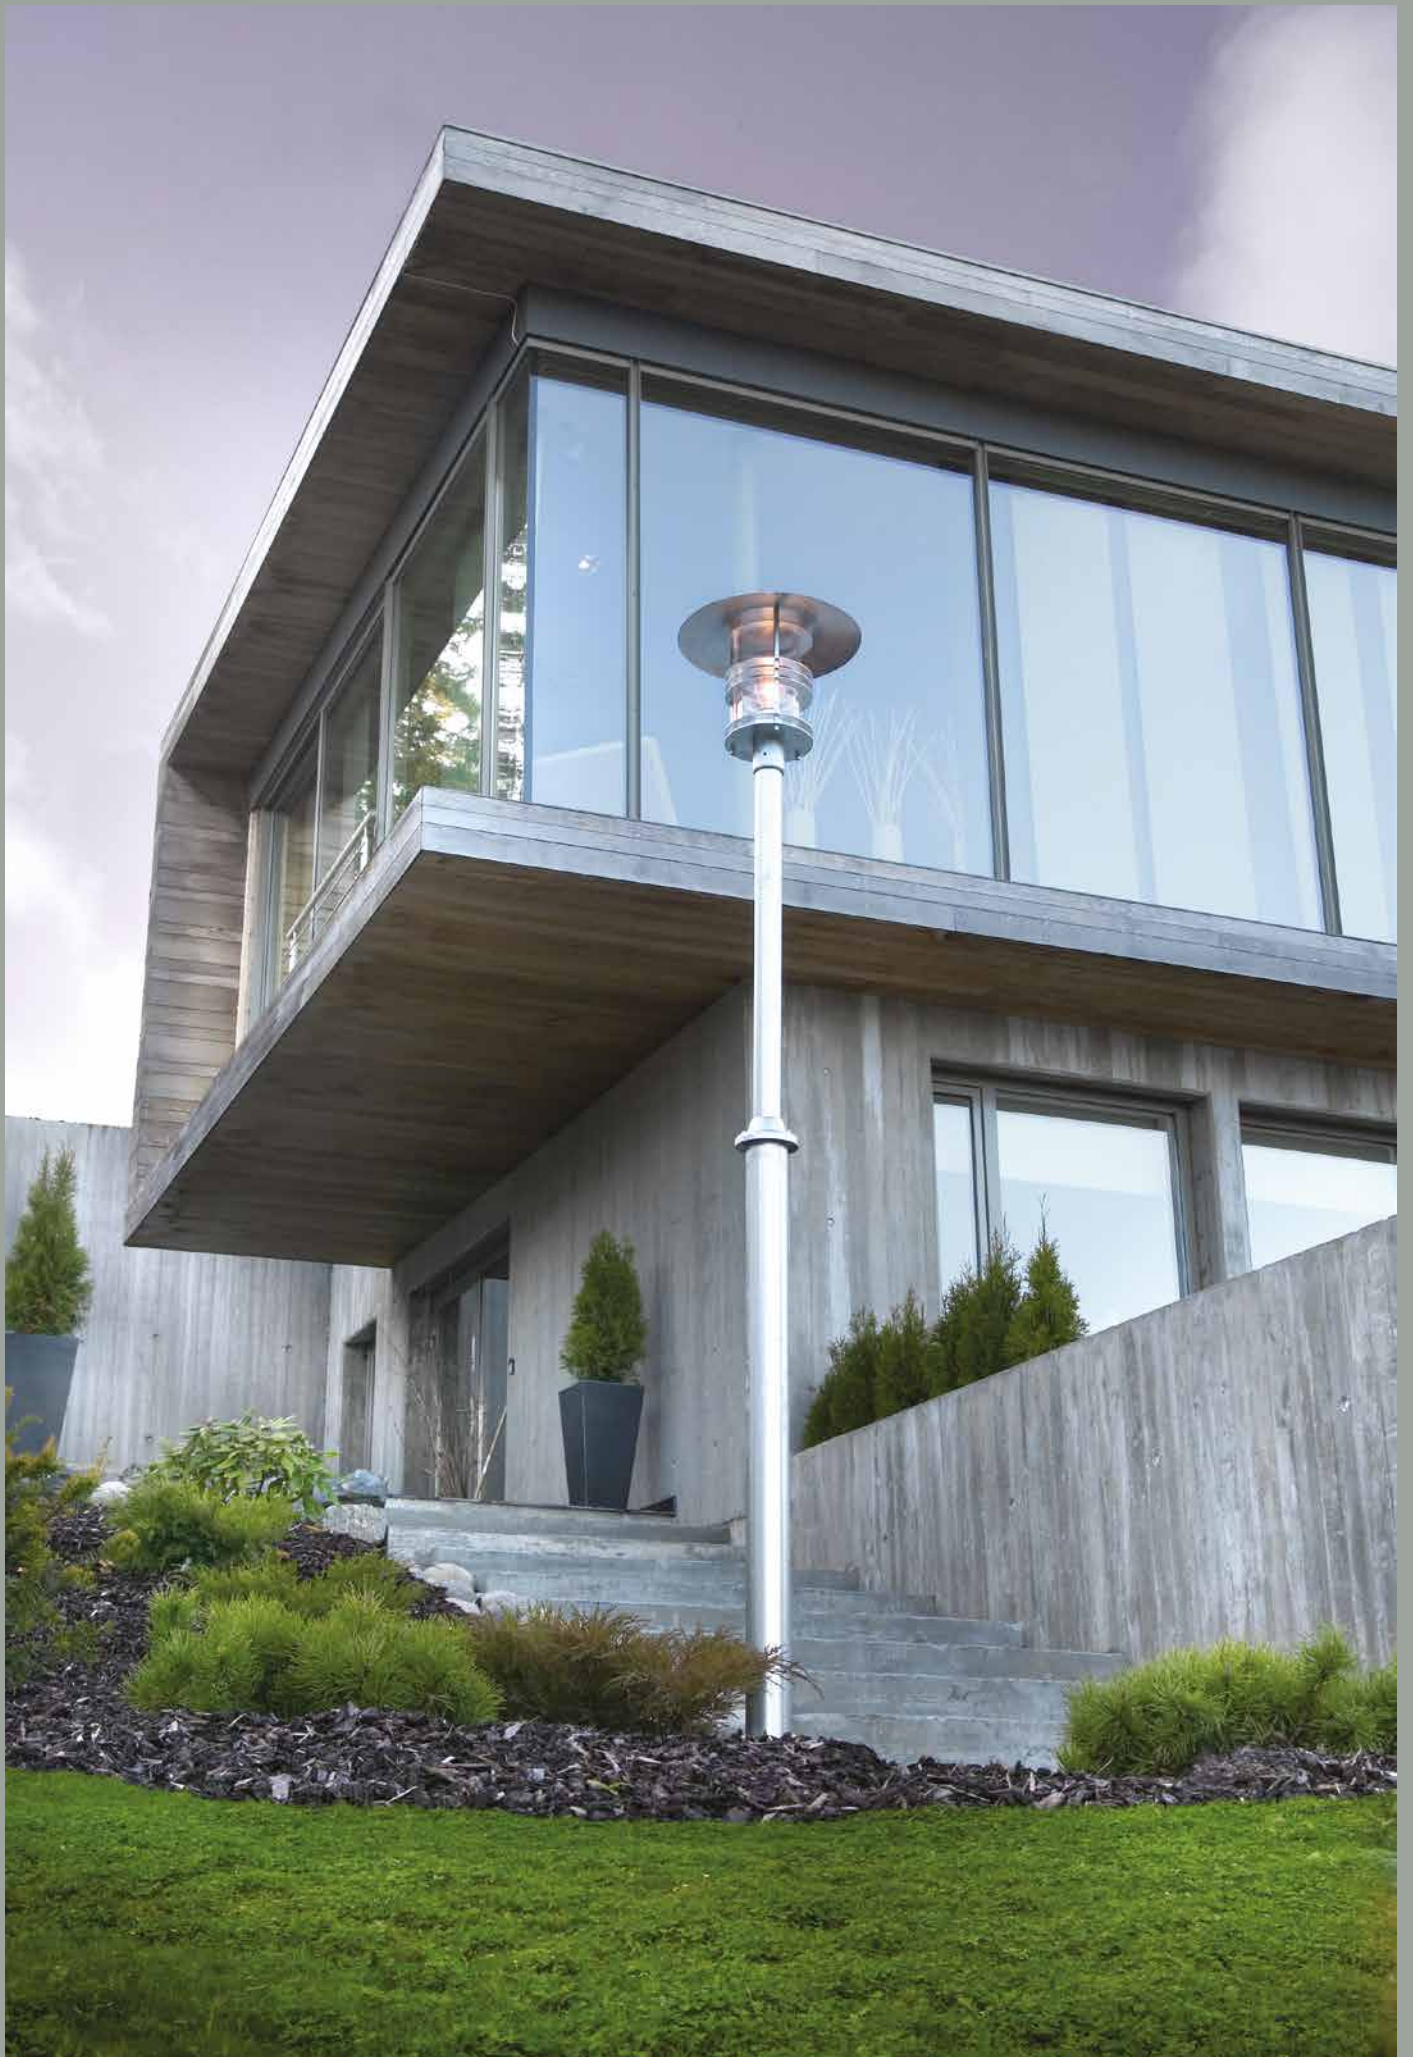

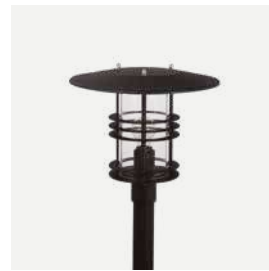

Stockholm Big



Colour:

-  Black
-  Galvanized



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

Accessories:


Art. 405


Concreting anchor.



Art. 406

Ground anchor.




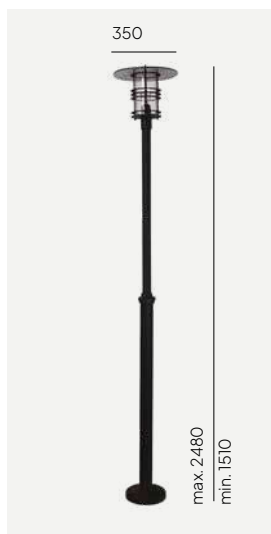

Art	Type of light source
281BL	E27
281GA	




Art	Type of light source
283BL	E27
283GA	

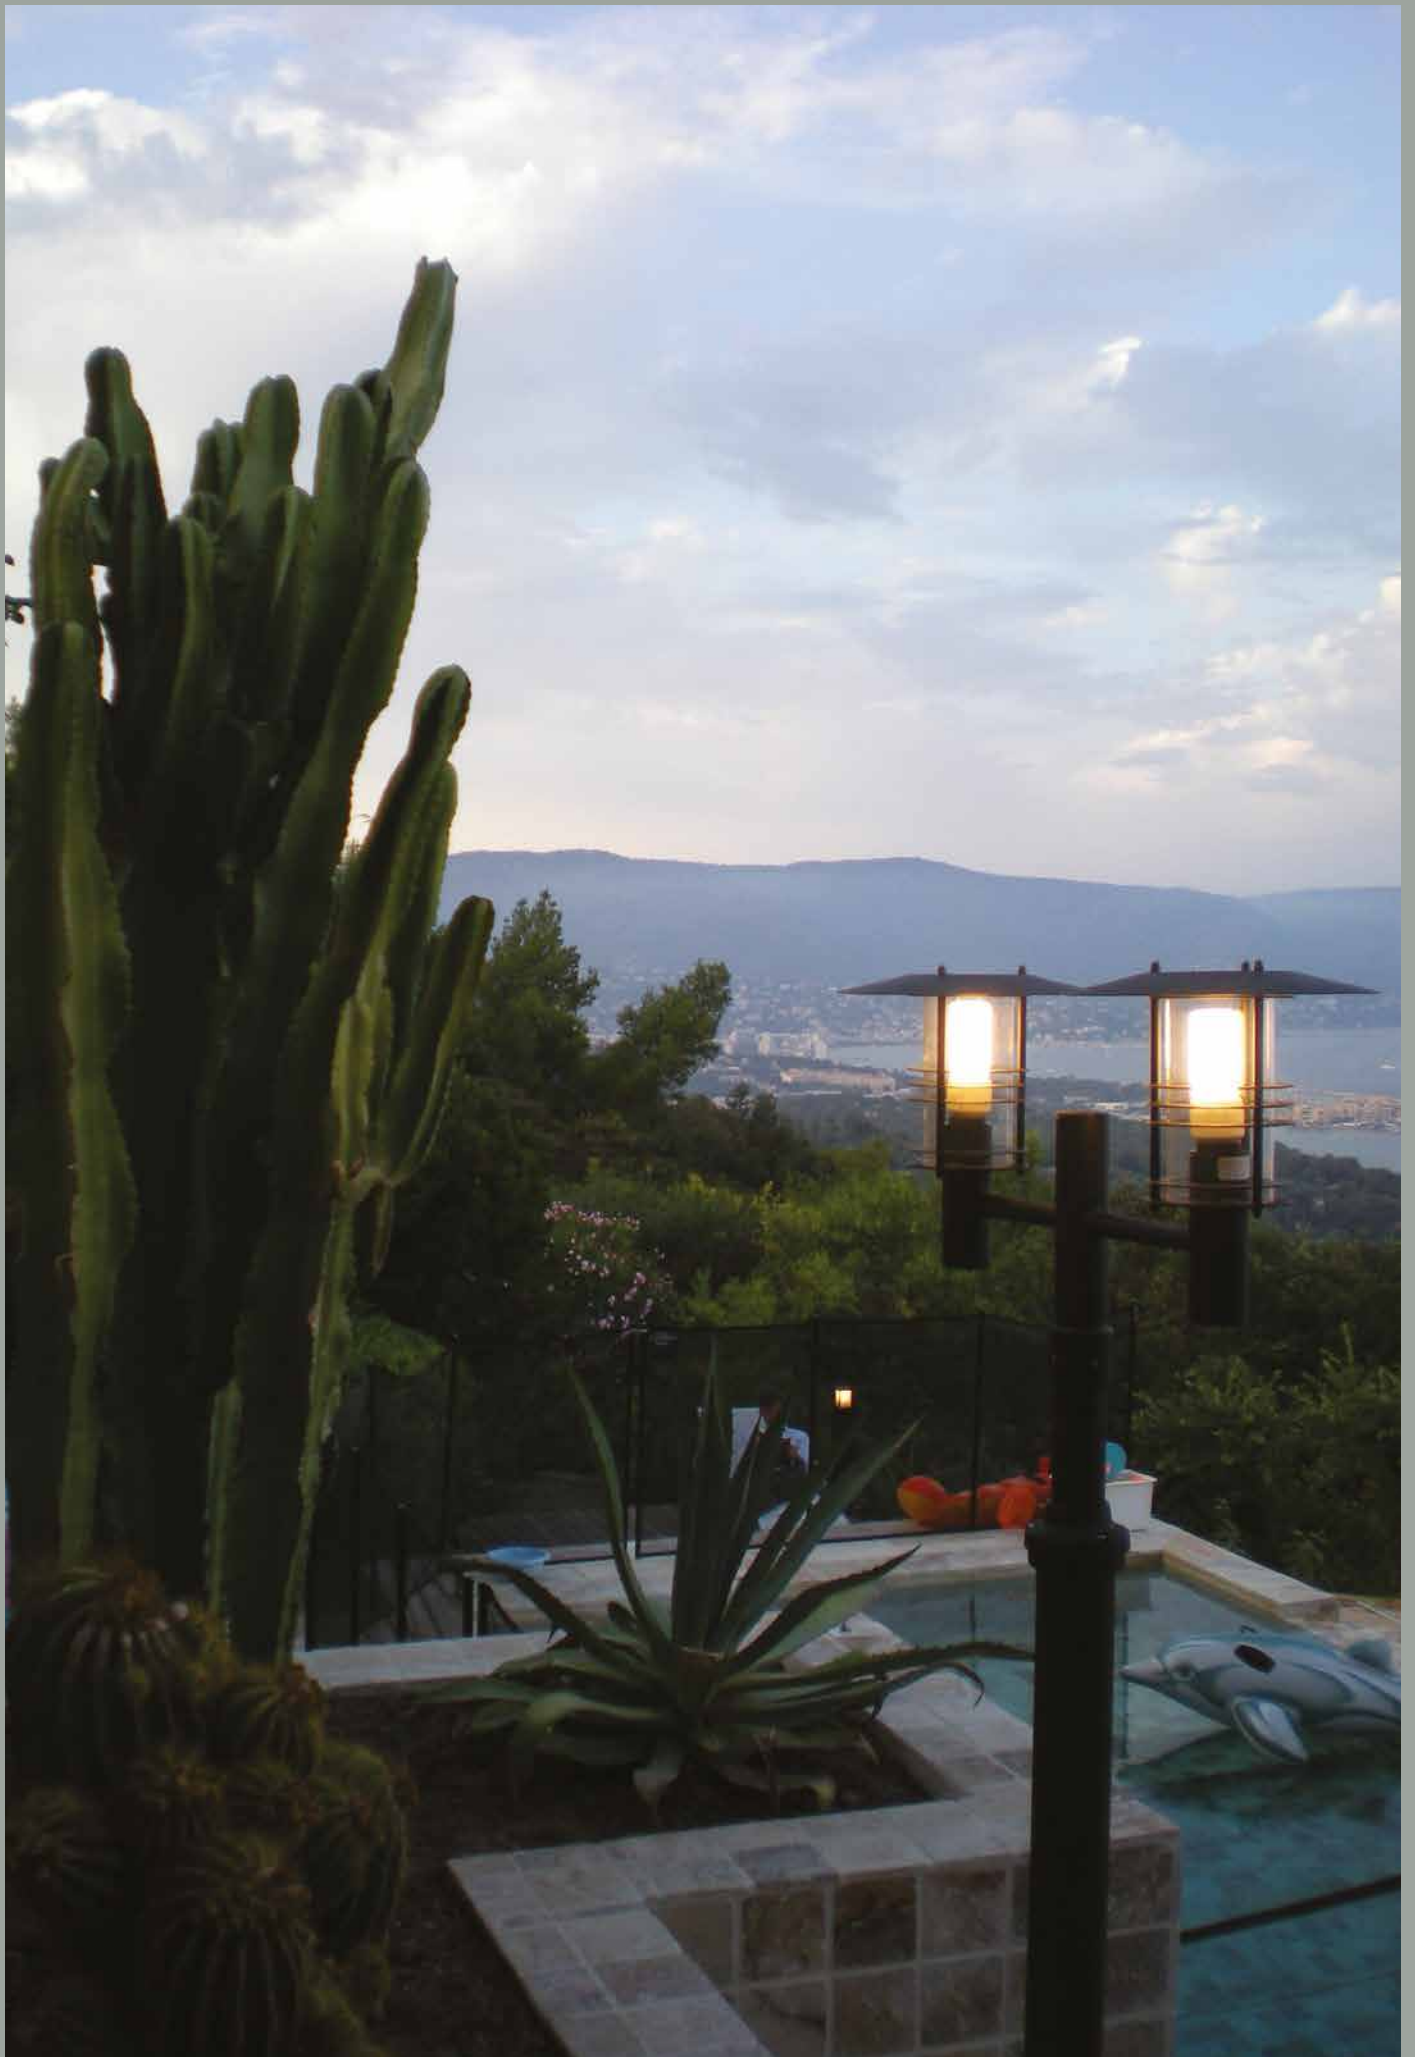



Arvika

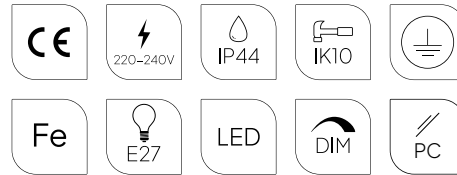

Colour:



Black



Galvanized

Colour temperature:

2700K* 3000K

4000K




*2700K on request only, contact your supplier.



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).


Accessories:


Art. 208

Concreting anchor.



Art. 207





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
898BL	E27	-	-	-	-
898GA					
891BL	LED	8,8W	543lm	3000K	> 102 000h
891GA					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Energy distributor ~230V
899BL	E27	-	-	-	-	F(SHUKO)
899GA						
893BL	LED	8,8W	543lm	3000K	> 102 000h	
893GA						
901BL		12,7W	568lm	4000K	> 72 000h	E(UNI)
901GA						
902BL						
902GA						





Basel



Colour:

- Black
- Galvanized
- Aluminium
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
660AL	E27
660BL	
660GA	
660ST	

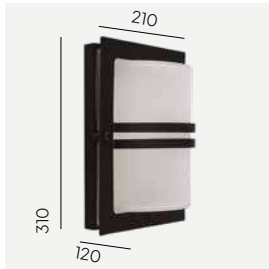


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
661AL	E27	-	-	-	-	-
661BL						
661GA						
661ST						
MD661AL	E27	-	-	-	-	Motion Detector
MD661BL						
MD661GA						
MD661ST						
668AL	E27	5,2W	483lm	3000K	> 70 000	Dimmable
668BL						
668GA						
668ST						
671AL	LED	9,5W	-	-	50 000h	Motion Detector
671BL						
671GA						
671ST						
672AL						
672BL						
672GA						
672ST						
				4000K		

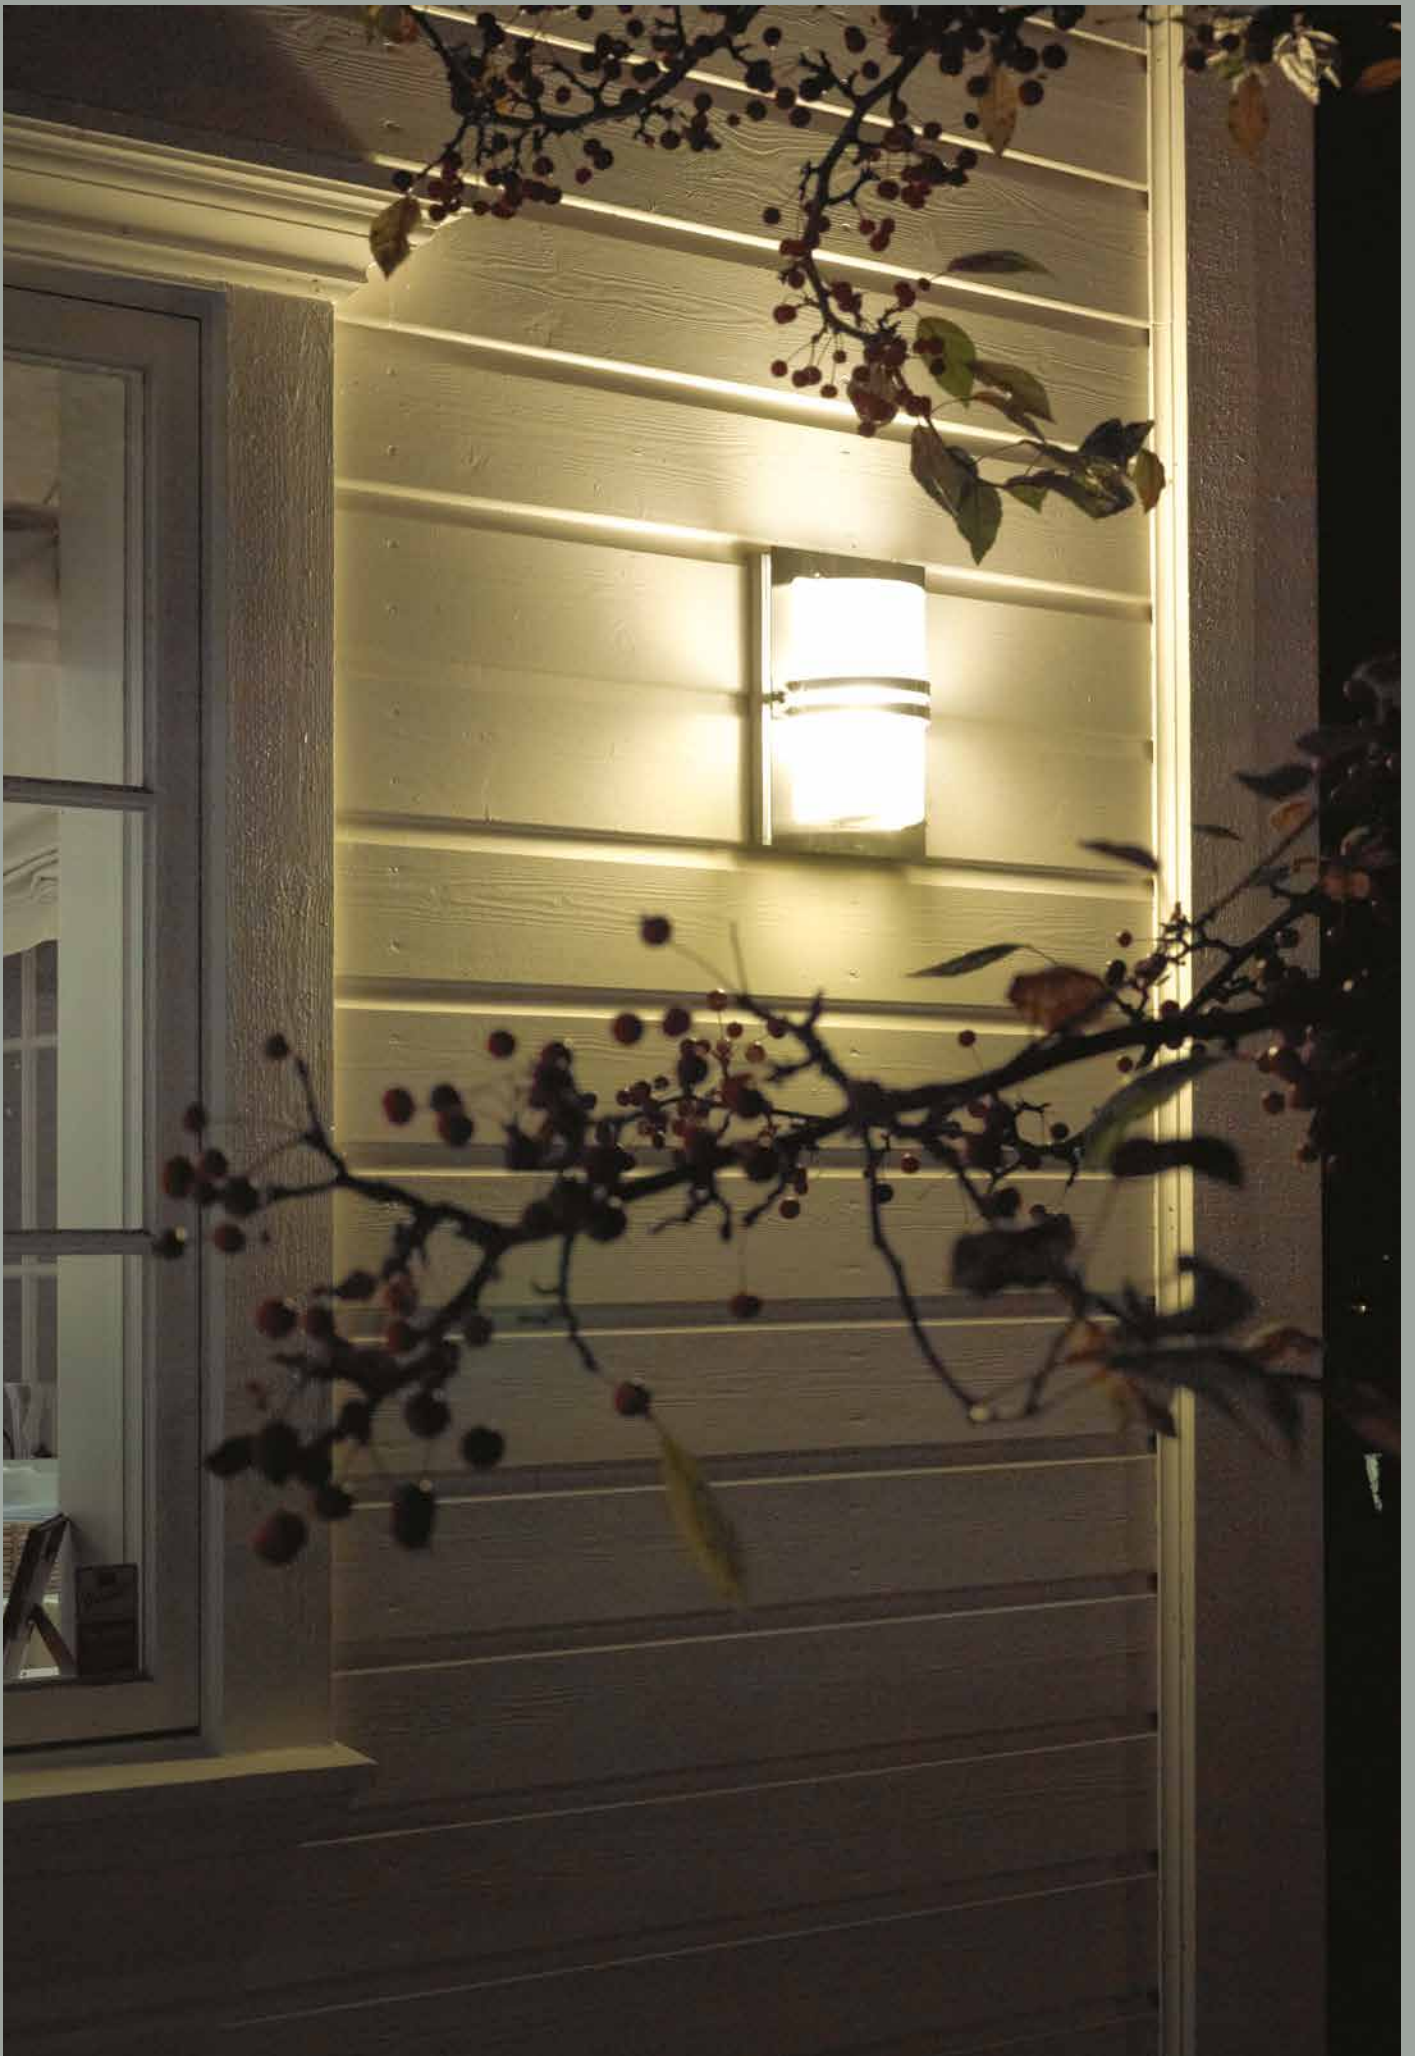



Bern

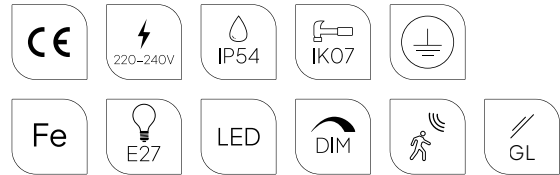

Colour:

- Black
- Galvanized
- Aluminium
- Stainless Steel

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
650AL	E27
650BL	
650GA	
650ST	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
651AL	E27	-	-	-	-	-
651BL						
651GA						
651ST						
655AL	LED	5,2W	477lm	3000K	> 72 000	Dimmable
655BL						
655GA						
655ST						
675AL	LED	11,2W	819lm	4000K	50 000h	Motion Detector
675BL						
675GA						
675ST						
676AL						
676BL						
676GA						
676ST						





Boden

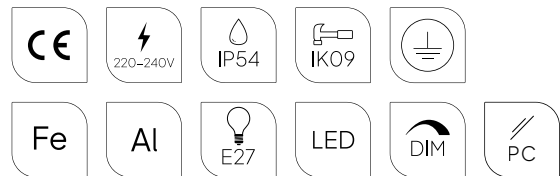

Colour:

Black

Galvanized

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
862BL	E27
862GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
860BL	E27	-	-	-	-	-
860GA						
866BL	LED	8W	307lm	3000K	50 000h	Dimmable
866GA				4000K		
5109BL			-			
5109GA						







Karlstad




Colour:

- Black
- Copper
- Galvanized
- White



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 153


Mounting corner



Art. 159

Luminaire mounting distance






Art	Type of light source
230BL	E27
230CO	
230GA	
230WH	



Art	Type of light source
230A/BL	E27
230A/GA	
230A/WH	



Karlstad

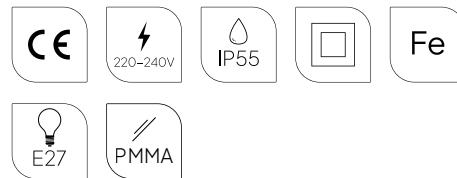**Colour:**

● Black

● Galvanized


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
2033BL	E27
2033GA	



Art	Type of light source
2032BL	E27
2032GA	

Karlstad



Colour:


- Black
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405


Concreting anchor.



Art. 406

Ground anchor.



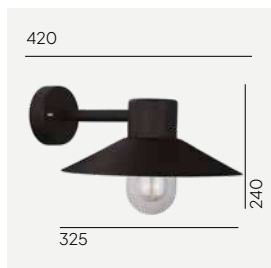

Art	Type of light source
290BL	E27
290GA	

Lund



Colour:



Black




Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 153


Mounting corner



Art. 159

Luminaire mounting distance



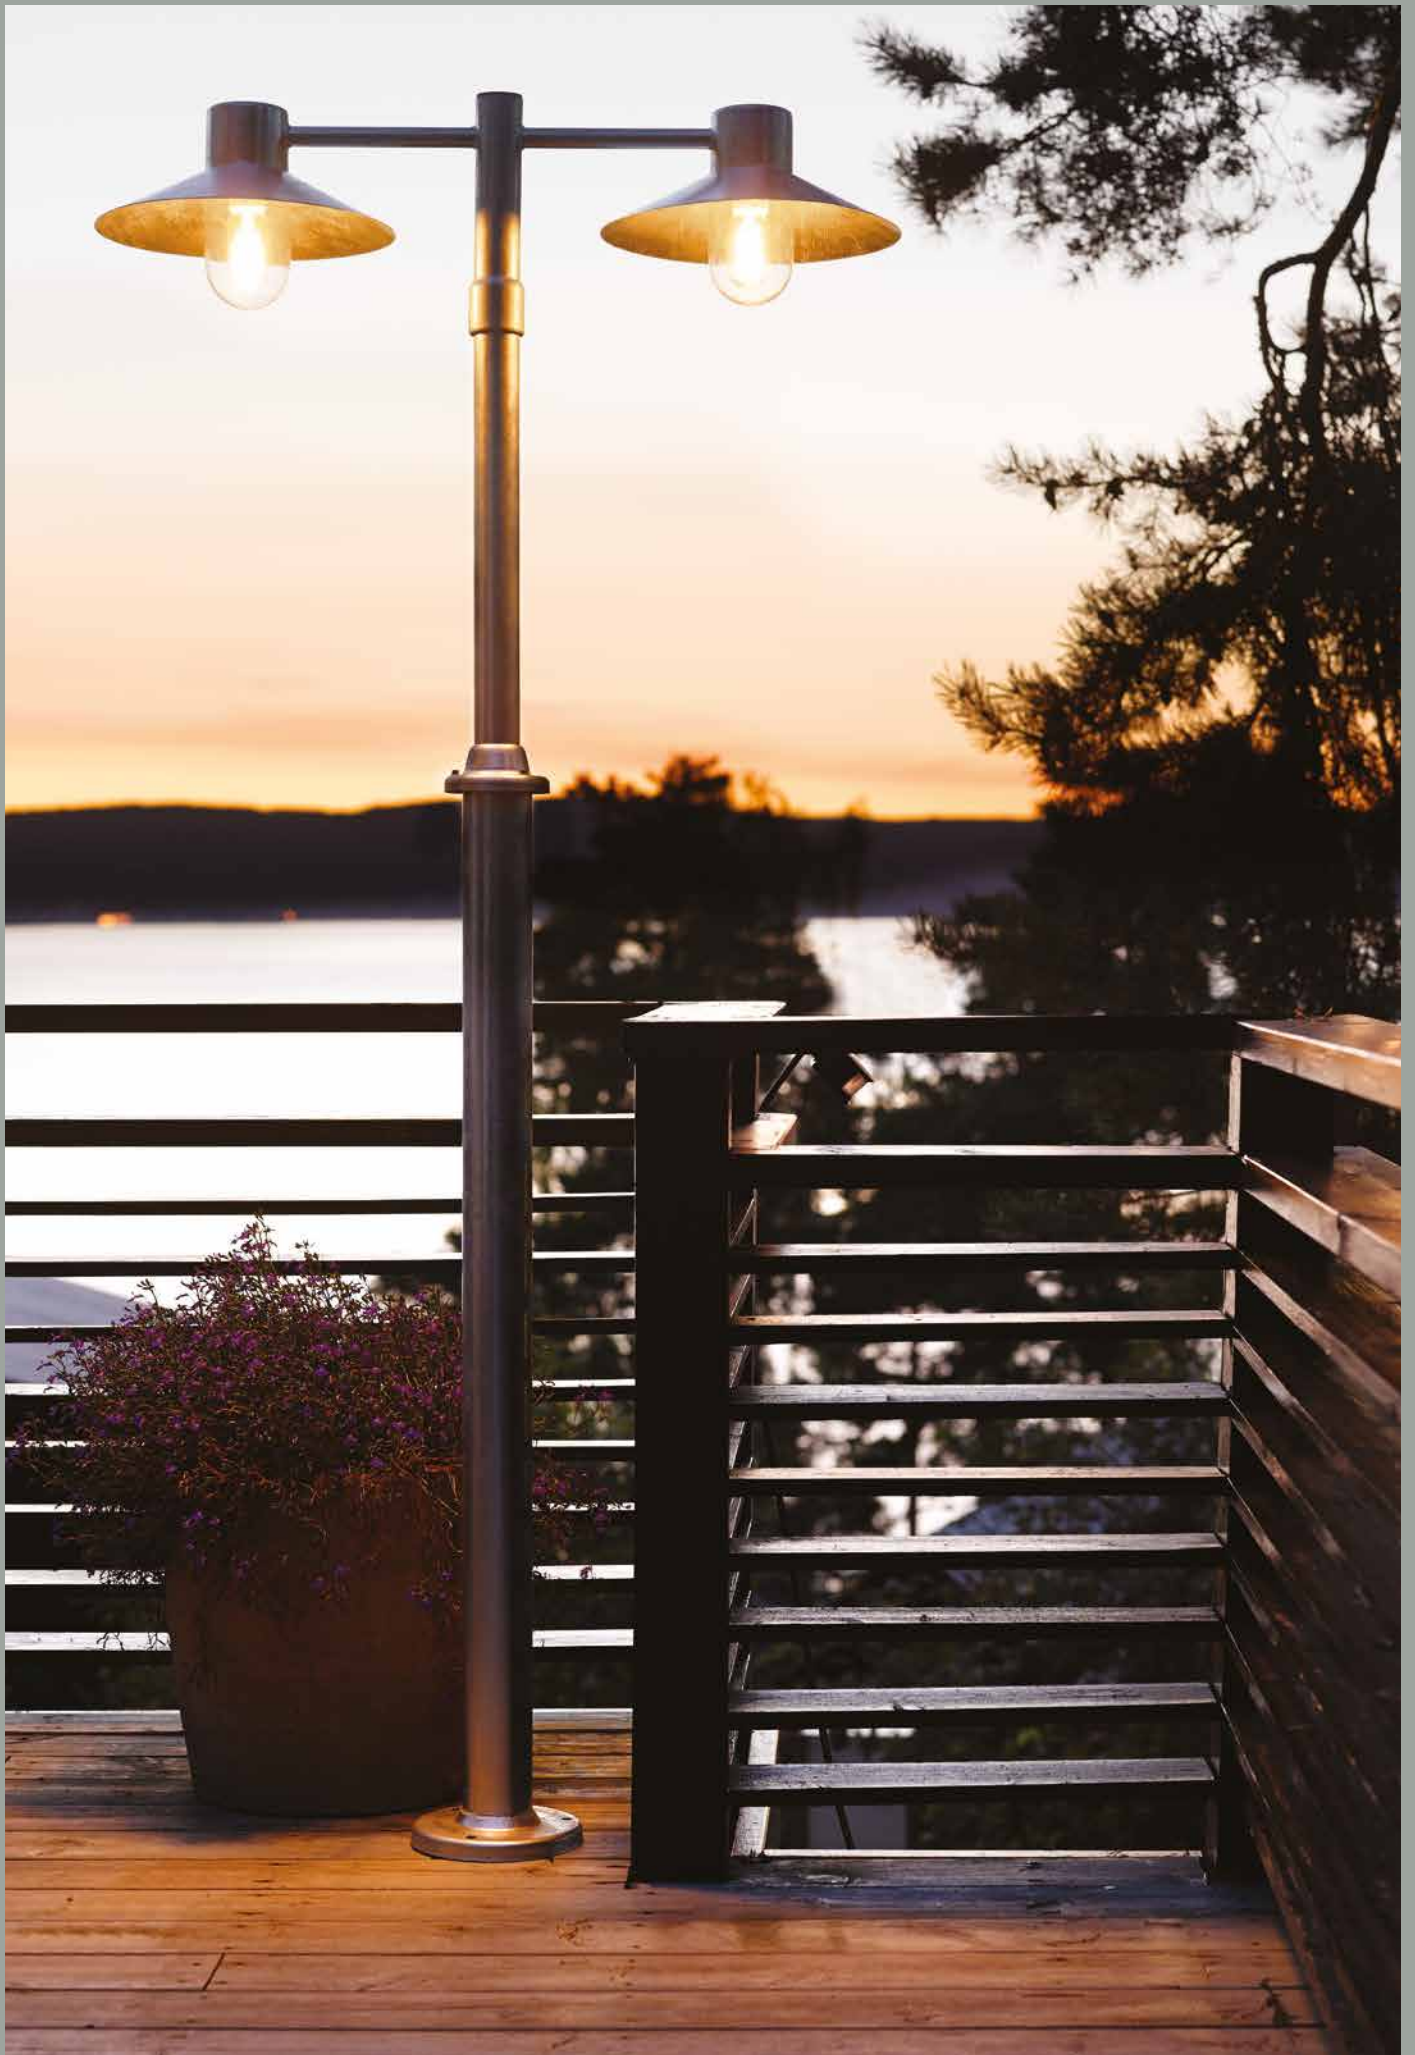

Lund



Colour:


- Black
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.





Art	Type of light source
274BL	E27
274GA	



Art	Type of light source
275BL	E27
275GA	

Mandal

An intriguing as well as functional and durable wall fixture. Scandinavian style is not only about design, but also about usability. Materials used to construct Mandal are robust and easy to maintain. Harmonious beam of light through the glass panes. It is a truly versatile luminaire that meets lighting requirements of contemporary architecture. Minimalism can be the perfect solution for any space, adding sophistication and unique character. Mandal harmonises perfectly with any type of building, but particularly in the galvanised version matches perfectly modern or industrial style.





Mandal



Colour:



Black



Galvanized

Colour temperature:

2700K* 3000K


4000K



*2700K on request only, contact your supplier.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

Accessories:


Art. 130

Corner bracket
Art.1373, 1374



Art. 149

Corner bracket
Art.1370, 1371





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1370BL	LED GU10	7,8W	500lm	2700K	40 000h	Dimmable
1370GA						
1371BL	LED GU10	-	-	-	-	-
1371GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1373BL	LED GU10	3,9W	250lm	2700K	40 000h	Dimmable
1373GA						
1374BL	LED GU10	-	-	-	-	-
1374GA						




Paris

Fashionable and elegant as a Parisian - a wall fixture that combines minimalist, industrial design and excellent functionality. Ideal for illuminating buildings and fence posts. Paris is also perfect for illuminating a house number plate. Four colour options allow for perfect match with any surroundings, both copper and galvanised versions will add exceptional character to any façade.





Paris

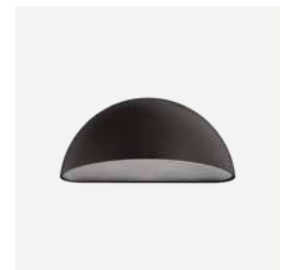

Colour:

- Black
- Copper
- Galvanized
- White


Colour temperature:




Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
160BL	E27	-	-	-	-	-
160CO						
160GA						
160WH						
1495BL	LED	5,2W	508lm	3000K	> 70 000h	Dimmable
1495GA						
1495WH						
5038BL		5,4W	476lm	4000K		
5038GA						
5038WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
163BL	E27	-	-	-	-	-
163GA						
163WH						
1496BL	LED	5,2W	471lm	3000K	> 70 000h	Dimmable
1496GA						
1496WH						
5039BL		5,4W	438lm	4000K		
5039GA						
5039WH						



Paris Big



CE	220-240V	IP43	Grounding symbol
Fe	LED	E27	DIM
			PC



Colour:

Black

White

Galvanized

Colour temperature:

2700K* 3000K

4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1392BL	LED	5,2W	346lm	3000K	> 70 000h	Dimmable
1392GA						
5113BL		5,4W	432lm	4000K		
5113GA						

Ski



Colour:

- Black
- Galvanized

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Luminaires with energy distributor option.adjustmen



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Energy distributor ~230V
1390BL	LED	5,2W	37lm	3000K	> 70 000h	Dimmable	F(SCHUKO)
1390GA							



Vansbro



Colour:


- Black
- Copper
- Galvanized



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 153

Mounting corner.



Art. 159

Luminaire mounting distance.





Art	Type of light source
1920BL	
1920CO	E27
1920GA	



Chelsea

Chelsea is craftsmanship, perfect workmanship and hand-blended polished copper, the result is a distinguished lighting charm. The exclusive Chelsea family offers traditional design and exceptional aesthetics. All the luminaires in the wide range are ideal for lighting entrances, terraces, walkways, driveways, gardens, fence posts. The unique style of these lamps will satisfy even the most demanding customers. An important feature of Chelsea to bear in mind that in natural weather conditions the bodies are covered with a noble patina.






Chelsea



Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
950CO	E27



Art	Type of light source
962CO	E27



Art	Type of light source
963CO	E27




Chelsea & Chelsea Big



Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

Accessories:

Art. 152

Mounting corner.
For Art. 954, Art. 960





Art	Type of light source
955CO	E27



Art	Type of light source
964CO	E27




Art	Type of light source
954CO	E27





Art	Type of light source
960CO	E27



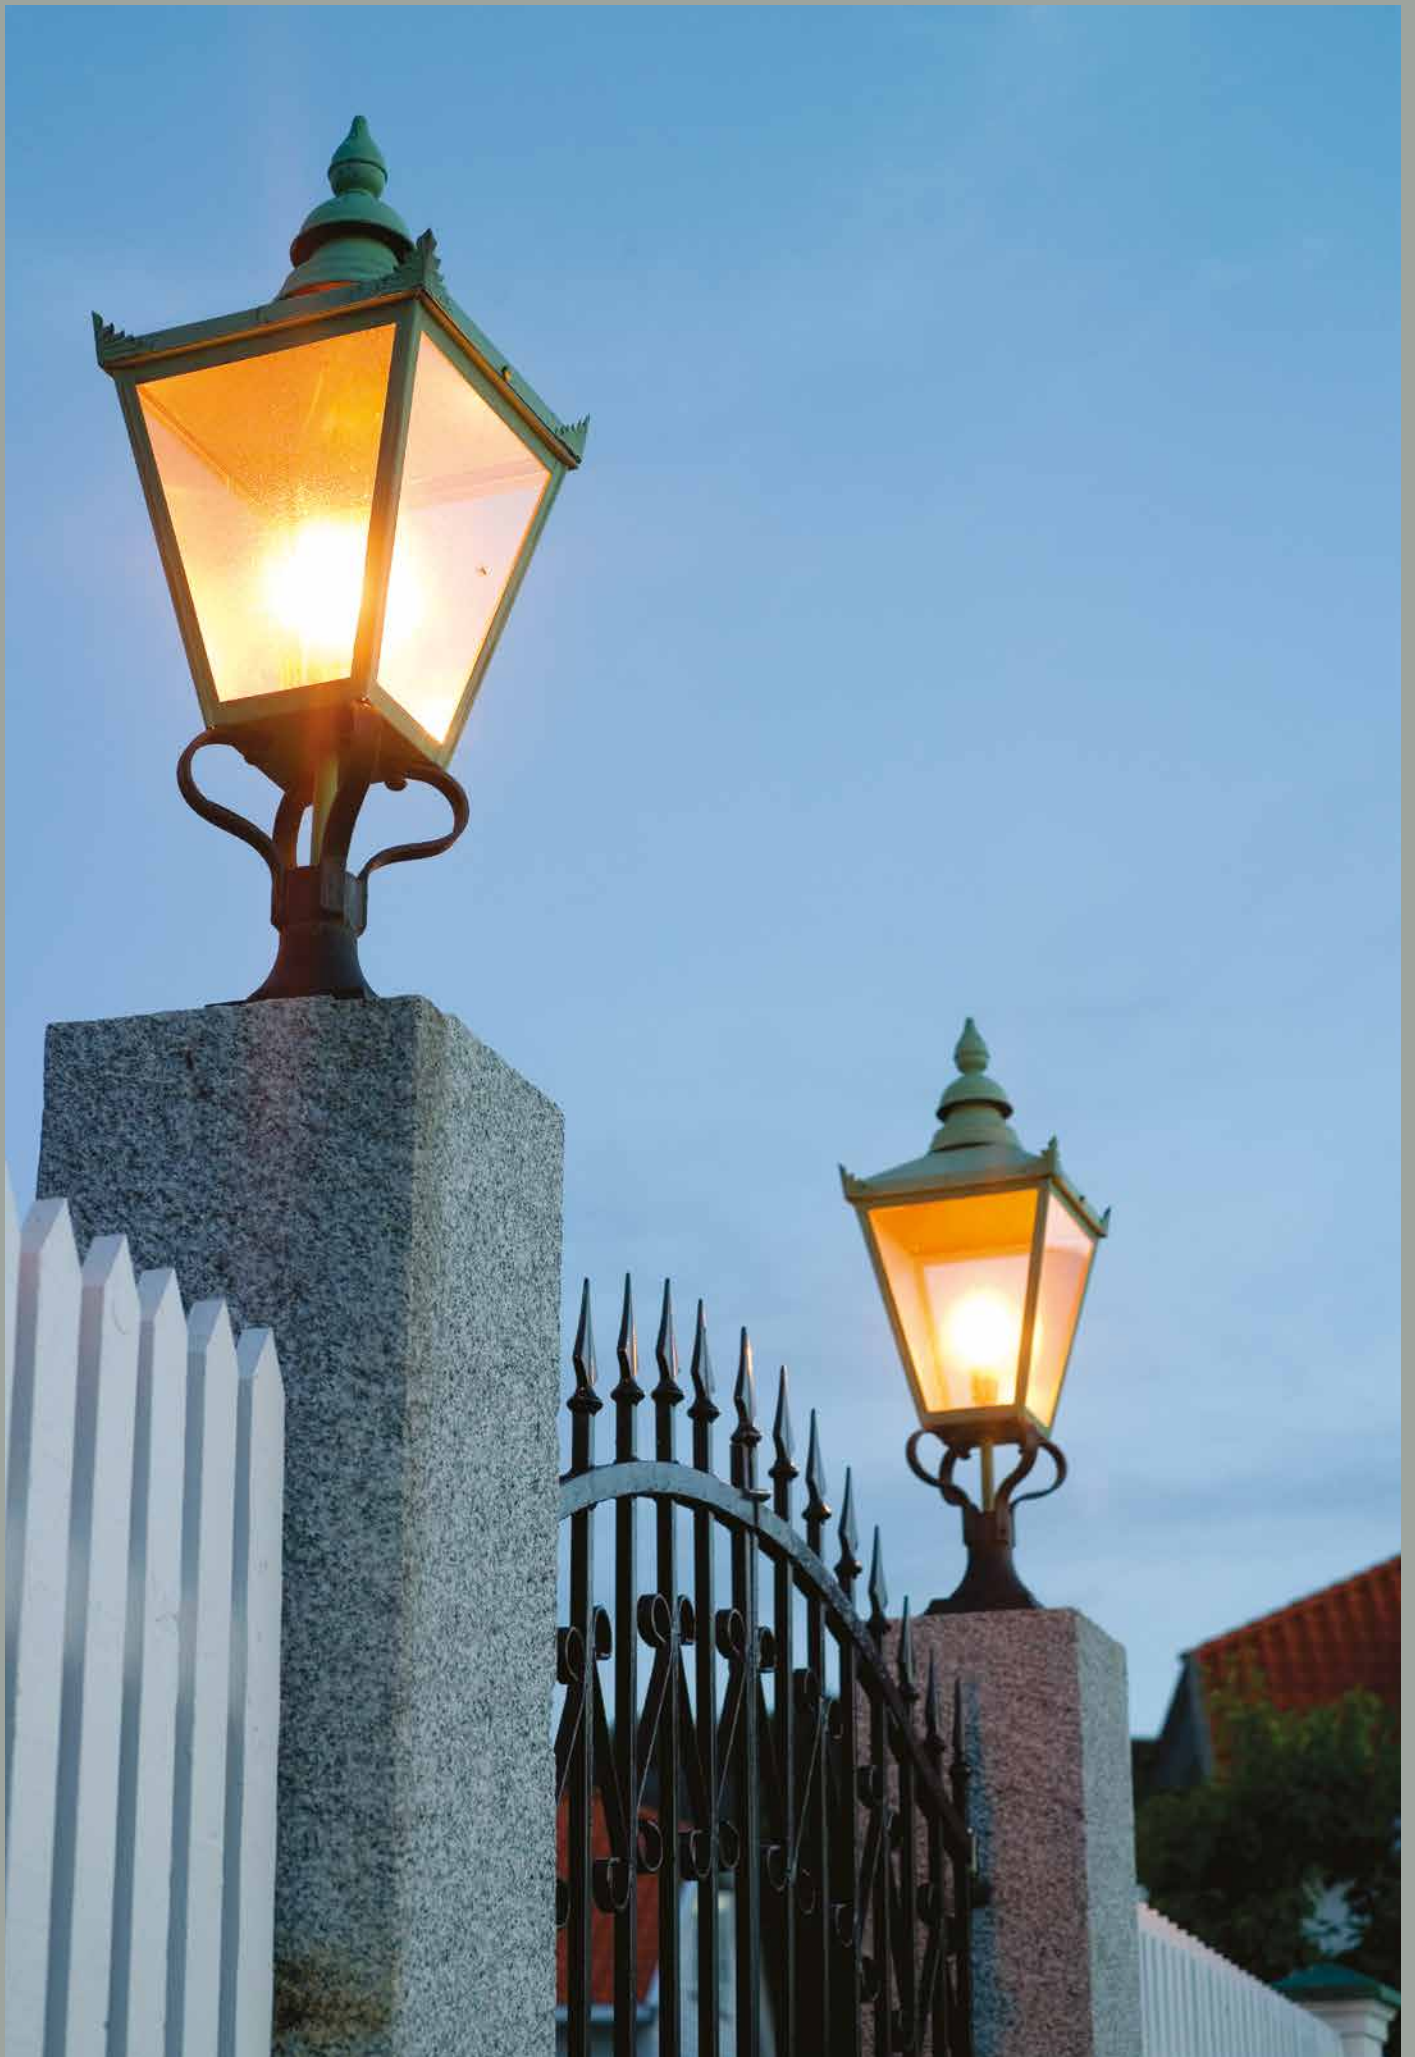

Chelsea & Chelsea Big

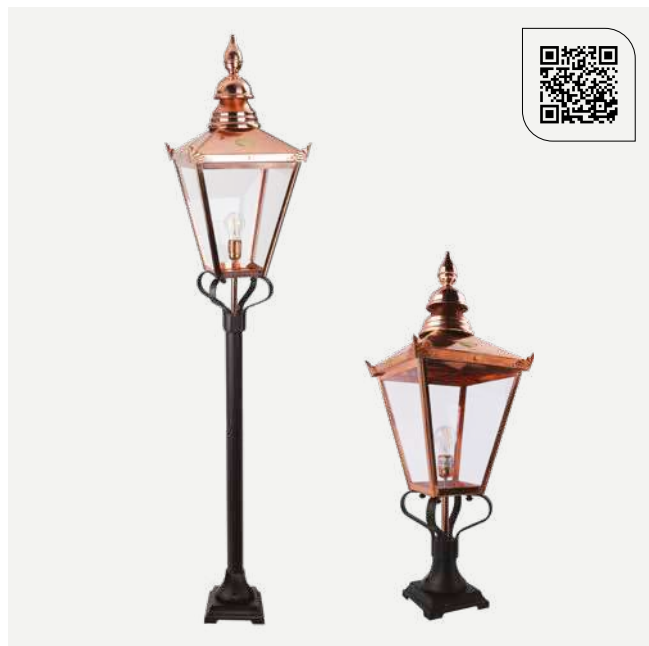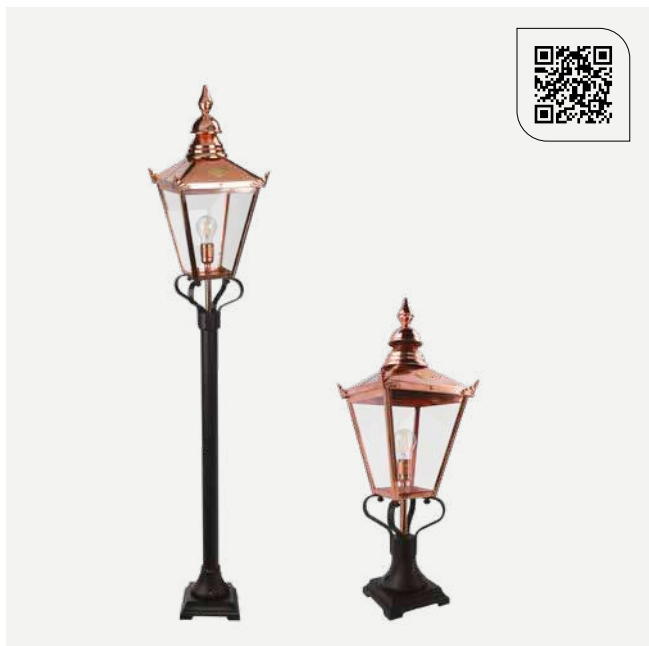

Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
941CO	E27



Art	Type of light source
957CO	E27




Art	Type of light source
940CO	E27



Art	Type of light source
956CO	E27

Chelsea

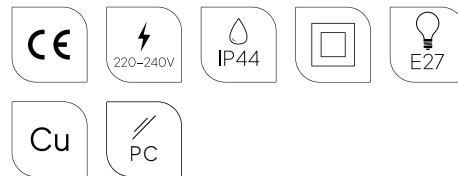

Colour:


 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).



Art	Type of light source
961CO	E27






Art	Type of light source
951CO	E27

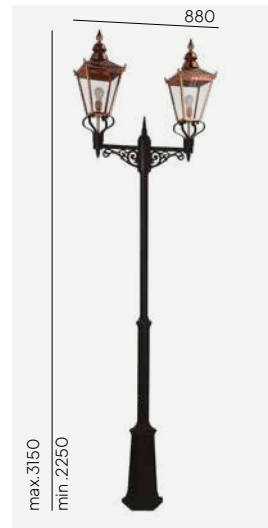

Art	Type of light source
953CO	E27

Chelsea

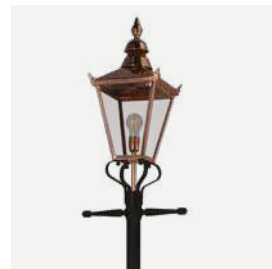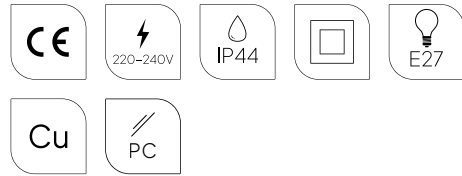


Colour:
 Copper



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

Accessories:


Art. 305

Concreting anchor.




Art. 306

Ground anchor.



Art. 108

Anchoring support.






Art	Type of light source
310BL	E27
310WH	



Art	Type of light source
311BL	E27
311WH	



Art	Type of light source
360BL	E27
360WH	



Art	Type of light source
361BL	E27
361WH	

Bologna




Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 152

Mounting corner





Bologna

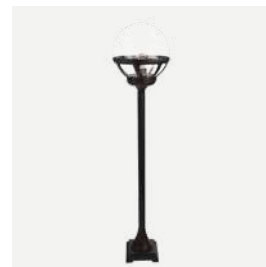


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Mounting corner





Art	Type of light source
312BL	E27
312WH	



Art	Type of light source
313BL	E27
313WH	



Art	Type of light source
314BL	E27
314WH	



Art	Type of light source
315BL	E27
315WH	





Bologna



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.





Art	Type of light source
362BL	E27
362WH	



Art	Type of light source
363BL	E27
363WH	



Art	Type of light source
364BL	E27
364WH	




Art	Type of light source
365BL	E27
365WH	





Art	Type of light source
370BL	E27
370WH	

Como

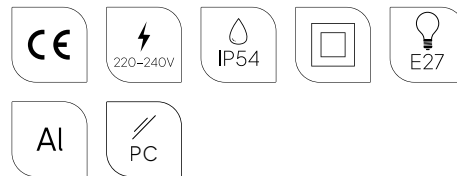


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 152

Mounting corner.






Art	Type of light source
375BL	E27
375WH	



Como

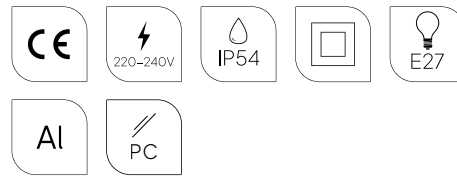


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:



Art. 307

Concreting anchor.





Como

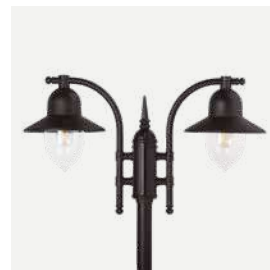

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.



Como



Art	Type of light source
371BL	E27
371WH	E27




Art	Type of light source
372BL	E27
372WH	E27



Art	Type of light source
373BL	E27
373WH	E27

Florence

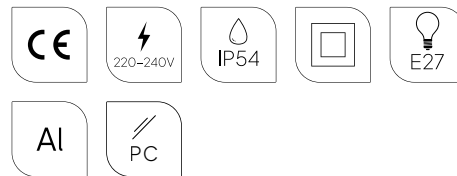


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 152

Mounting corner.






Art	Type of light source
800BL	E27
800WH	



Florence

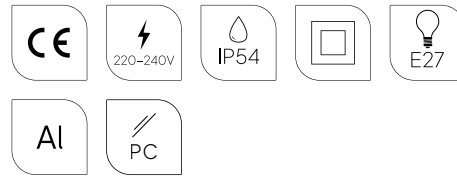


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
800A/BL	E27
800A/WH	



Art	Type of light source
805BL	E27
805WH	

Florence

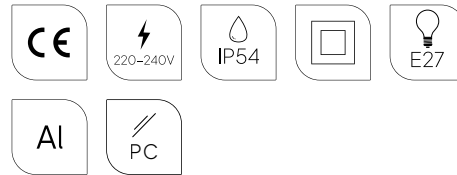


Colour:



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
810BL	E27
810WH	




Art	Type of light source
820BL	E27
820WH	



Art	Type of light source
830BL	E27
830WH	

Florence



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.



Art. 306

Ground anchor.





Genoa & Genoa Mini



Colour:

- Black
- White

CE

220-240V

IP54

□

E27

Al


PC



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

IP54

□

E27

PC

Al



Art	Type of light source
170BL	E27
170WH	

IP54

□

E27

PC


Al



Art	Type of light source
175BL	E27
175WH	



Glasgow

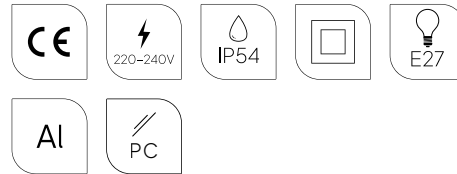

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
730BL	E27
730WH	



London

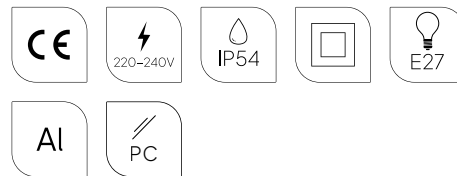

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
497BL	E27
497WH	



London Big



Colour:

- Black
- White

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.


CE	220-240V	IP54	IP54/65	□
Al	PC	LED	E27	



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 152

Mounting corner.






Art	Type of light source
490BL	E27
490WH	




Art	Type of light source
493BL	E27
493WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4116BL	LED	9,5W	757lm	3000K	50 000h
4116WH				4000K	
4117BL			805lm		
4117WH			805lm		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4118BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4118WH				4000K		
4119BL			1767lm	4000K		
4119WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4136BL	LED	9,5W	757lm	3000K	50 000h
4136WH				4000K	
4137BL			805lm	4000K	
4137WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4138BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4138WH				4000K		
4139BL			1767lm	4000K		
4139WH						



Art	Type of light source
480BL	E27
480WH	



Art	Type of light source
481BL	E27
481WH	

London



Colour:

- Black
- White

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.


CE	220-240V	IP54	IP54/65	□
Al	PC	LED	E27	



Product Eco-friendly.



Luminaire suitable for extreme conditions.





Fully replaceable electrical kit.

Accessories:

Art. 152

Mounting corner.



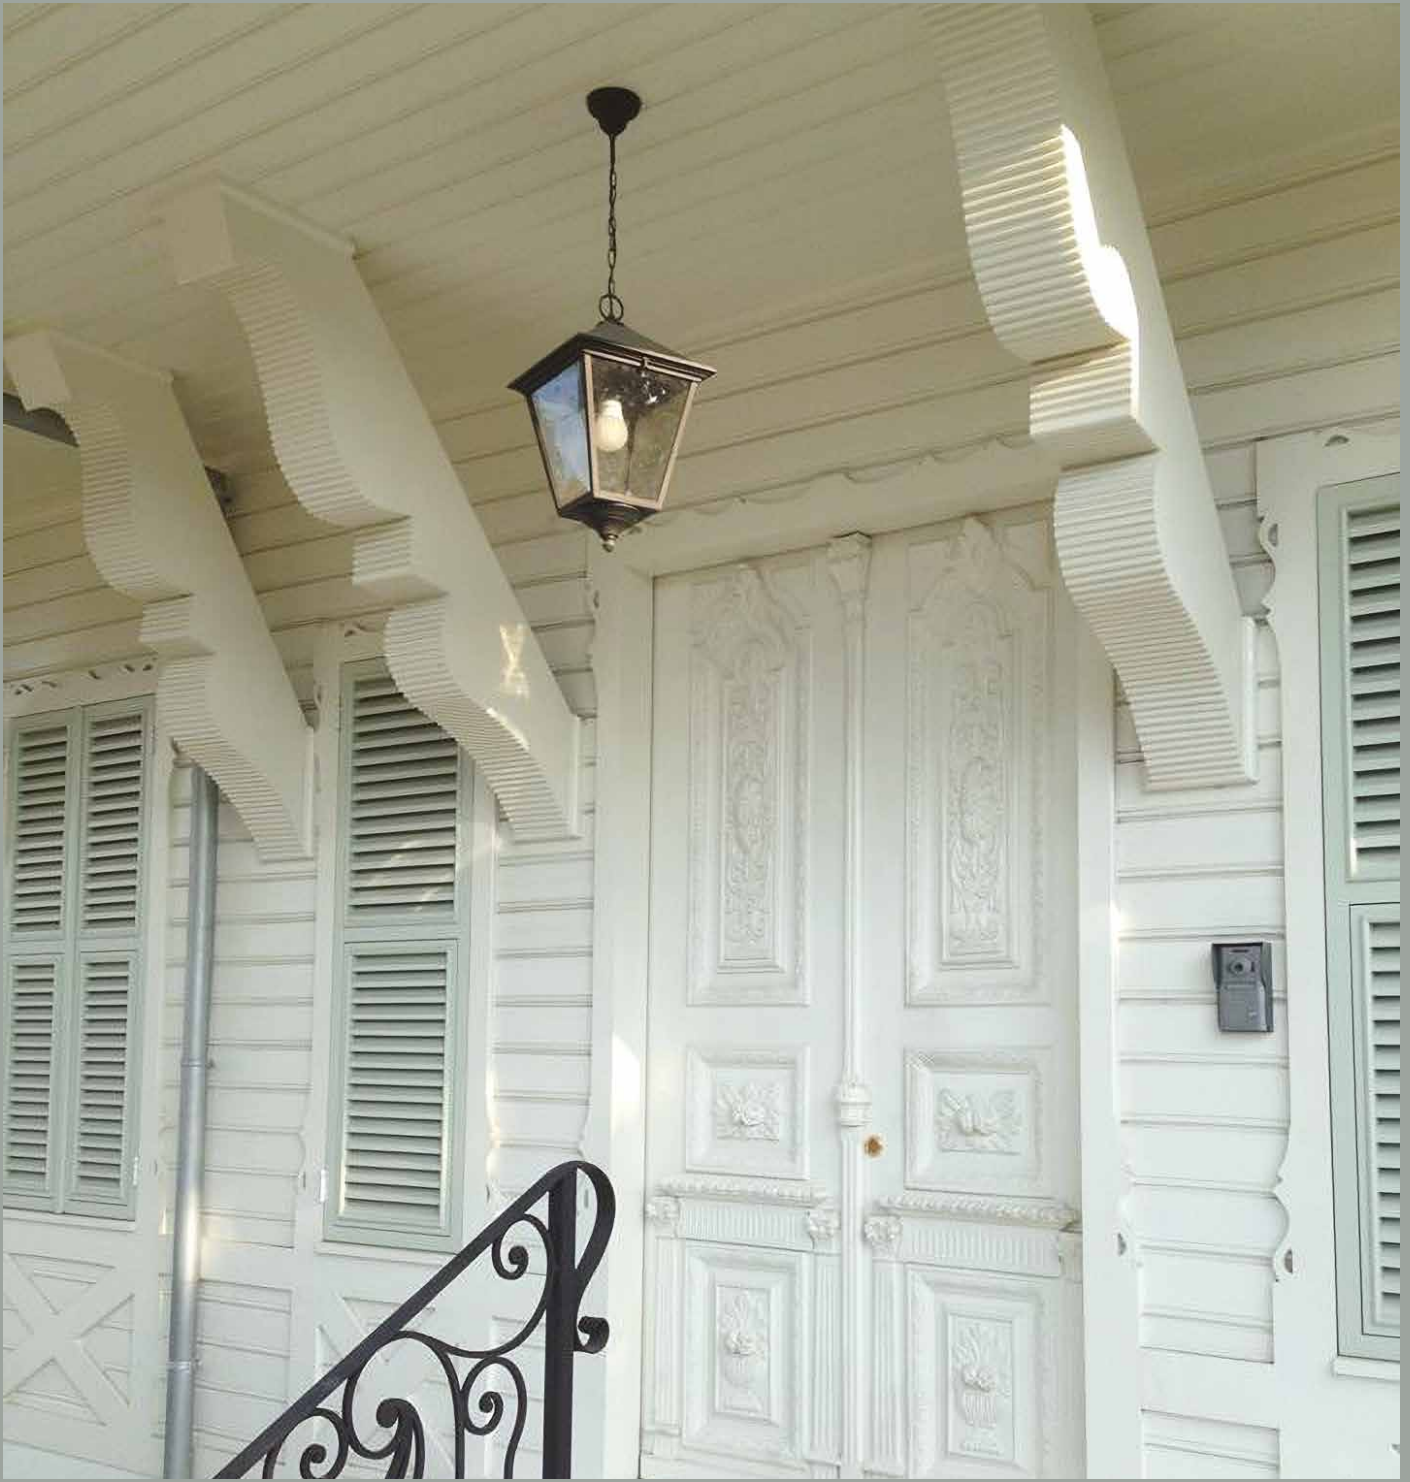

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4140BL	LED	17,5W	1392lm	3000K	50 000h	-
4140WH						
4141BL						
4141WH						
4142BL		14,6W	1716lm	30000K	IESNA type V	
4142WH						

London & London Big



Colour:

- Black
- White

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.

CE

220-240V

IP54

IP54/65

□

Al

PC

E27


LED



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.

IP54

□

E27

Al

PC



Art	Type of light source
481A/BL	E27
481A/WH	

IP54

□

E27

Al

PC



Art	Type of light source
493A/BL	E27
493A/WH	



London & London Big



Colour:

- Black
- White

Colour temperature:

2700K* 3000K 4000K



*2700K on request only, contact your supplier.


CE	220-240V	IP54	LED
Al	PC	E27	



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
484BL	E27
484WH	



Art	Type of light source
485BL	E27
485WH	



Art	Type of light source
494BL	E27
494WH	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4144BL	LED	9,3W	756lm	3000K	50 000h
4144WH					





London & London Big

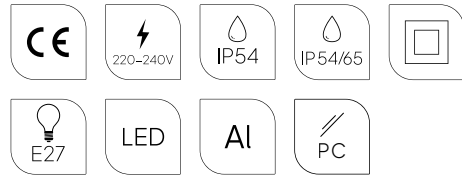

Colour:

- Black
- White

Colour temperature:

2700K* 3000K 4000K




*2700K on request only, contact your supplier.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 108

Anchoring support.




Art. 305

Concreting anchor.




Art. 306

Ground anchor.






Art	Type of light source
482BL	E27
482WH	

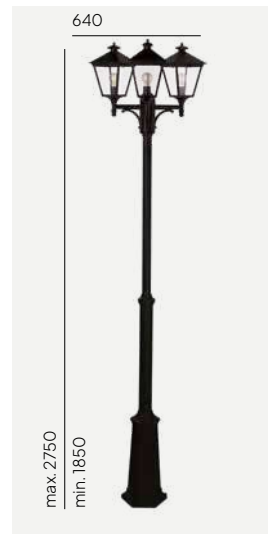

Art	Type of light source
483BL	E27
483WH	




Art	Type of light source
491BL	E27
491WH	

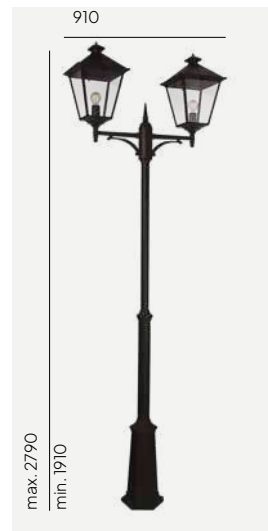

Art	Type of light source
492BL	E27
492WH	



Art	Type of light source
495BL	E27
495WH	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4124BL	LED	17,5W	1392lm	3000K	50 000h
4124WH				4000K	
4125BL					
4125WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4128BL	LED	19W	1514lm	3000K	50 000h
4128WH				4000K	
4129BL			1514lm		
4129WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4132BL	LED	28,5W	2271lm	3000K	50 000h
4132WH				4000K	
4133BL			2271lm		
4133WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4126BL	LED	14,6W	1716lm	3000K	> 120 000h	IESNA type V
4126WH				4000K		
4127BL			1767lm	4000K		
4127WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4130BL	LED	29,2W	3422lm	3000K	> 120 000h	IESNA type V
4130WH				4000K		
4131BL			3534lm	4000K		
4131WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4134BL	LED	43,8W	5148lm	3000K	> 120 000h	IESNA type V
4134WH				4000K		
4135BL			5301lm	4000K		
4135WH						

Latina



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
105BL	E27
105WH	




Modena & Modena Big



Colour:

● Black


○ White

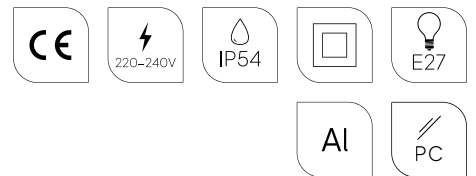

Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 152

Corner bracket





Art	Type of light source
350BL	E27
350WH	



Art	Type of light source
351BL	E27
351WH	



Art	Type of light source
380BL	E27
380WH	



Art	Type of light source
381BL	E27
381WH	

Modena & Modena Big



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
351A/BL	E27
351A/WH	



Art	Type of light source
381A/BL	E27
381A/WH	




Modena & Modena Big



Colour:

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
304BL	E27
304WH	



Art	Type of light source
300BL	E27
300WH	




Art	Type of light source
384BL	E27
384WH	





Modena



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 305

Concreting anchor.




Art. 306


Ground anchor.



Art. 108

Anchoring support.



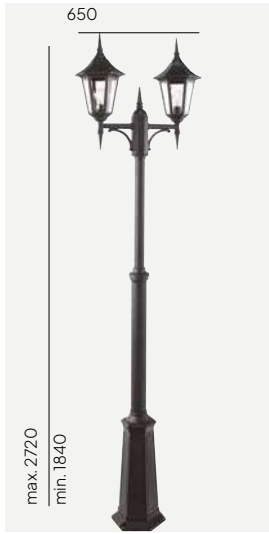


Art	Type of light source
302BL	E27
302WH	



Art	Type of light source
303BL	E27
303WH	

Modena Big



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 305

Concreting anchor.




Art. 306

Ground anchor.



Art. 108

Anchoring support.





Art	Type of light source
301BL	E27
301WH	




Art	Type of light source
382BL	E27
382WH	



Art	Type of light source
397BL	E27
397WH	

Venice

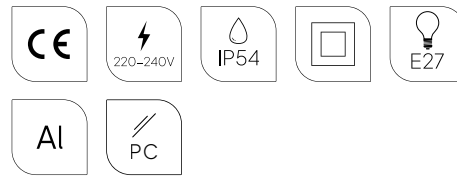

Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
261BL	E27
261WH	




Rimini



Colour:

● Black


○ White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:

Art. 307

Concreting anchor.





Art	Type of light source
250BL	E27
250WH	



Art	Type of light source
404BL	E27
404WH	



Art	Type of light source
259BL	E27
259WH	



Art	Type of light source
259IBL	E27
259IWH	

Rimini



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 150

Corner bracket





Rimini & Milano



Colour:


- Black
- White



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 405

Concreting anchor.



Art. 406

Ground anchor.





Art	Type of light source
401BL	E27
401WH	



Art	Type of light source
402BL	E27
402WH	



Art	Type of light source
403BL	E27
403WH	

Poles



Art. 1277

Art. 1275

Art. 1273



Art. 3009

Art. 3011

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Aluminium
-  Black
-  Graphite

Colour:

-  Galvanized


Colour:

-  Black
-  White

Accessories:


Art. 405

Concreting anchor.




Art. 406

Ground anchor.



Poles

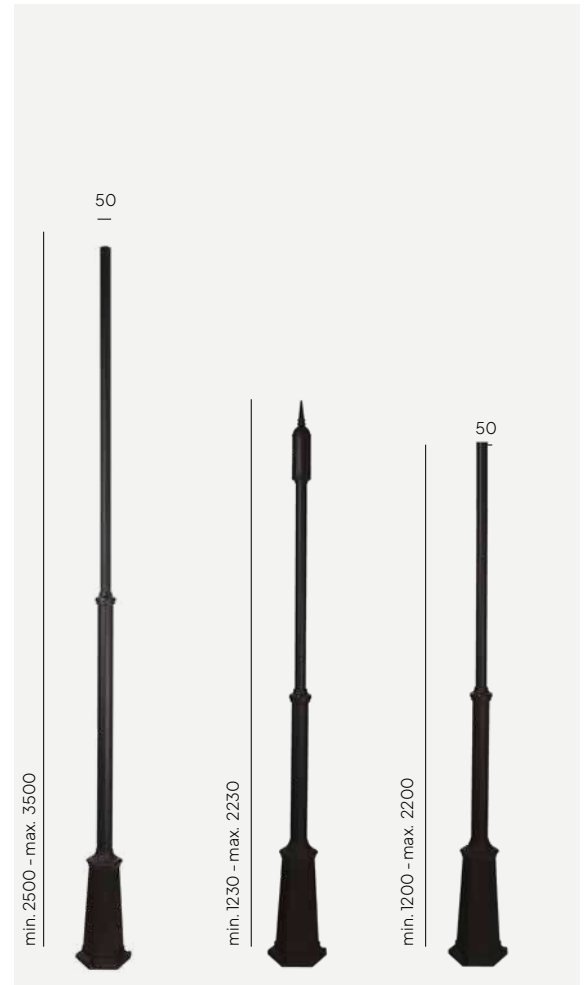

Art. 3004 Art. 3005
Art. 3005 includes concreting anchor 7663.

Art. 2000

Art. 1255

Art. 1257

Art. 30101

Art. 3013

Art. 3010

Art. 3013 includes terminal.



Colour:



Colour:



Colour:



Colour:



Colour:



Colour:




Colour:




Accessories:


Art. 7661
Electric box




Art. 7662
Pole connector.




Art. 7663
Concreting anchor




Art. 7664
Anchor




Art. 7668
Electric box




Art. 144
Pole conector




Art. 305
Concreting anchor



Art. 306
Ground anchor



Special Icons




Natural Scandinavian wood.

We use only high-quality, natural Scandinavian wood, which adds warmth and elegance to the lamps. The natural Scandinavian wood used in the fittings refers to the Nordic style, its naturalness, lightness and subtlety.



Luminaires with energy distributor option adjustment.

Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.




Fully replaceable electrical kit.

If required, our lamps allow for easy replacement of electrical components, ensuring a longer product life.



Handmade product (artisanal method).

Each lamp is meticulously handcrafted using traditional craftsmanship methods to guarantee its unique character. The power of craftsmanship.



Multiple light variants adjustment.

We offer a variety of lighting modes, from soft light to strong illumination, adapting to different lighting needs.



Vandal-resistant luminaire.

Our lamps are robustly manufactured and vandal-resistant, making them an ideal choice for public areas.




Product Eco-friendly.

We care about the environment. Our products are environmentally friendly and manufactured with minimal environmental impact in mind.




Luminaire suitable for extreme conditions.

The lamp construction is resistant to extreme weather conditions, from frost to heat, guaranteeing its durability.




Wide range of light direction

Our lamps are equipped with an adjustable head, allowing the direction of light to be set precisely according to individual needs.



Double corrosion protection (galvanising+powder coating).

Each lamp is protected against corrosion twice, first by galvanising and then by powder coating. This guarantees its longevity and resistance to weathering.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

Our garden lights offer advanced energy control features that allow significant savings. Features such as light dimming, motion sensor and twilight sensor ensure that the light shines only when it is needed

Icons

Product Characteristics



Luminaire with socket for replaceable light source (GU10, E27, E14)



Luminaire with socket for interchangeable light sources.



LED luminaire
Luminaire equipped with LED module



Voltage 220-240V

Control



Motion sensor
Luminaire equipped with a motion sensor.



DIM dimmable version
Phase dimmable luminaire



DALI light control



Light control in the D4i system

Security



CE Certificate
CE - Manufacturers declaration that a labelled product complies with the requirements of the EU 'p.so-called ,New Approach' directive



Protection class (I, II, III)
Protection class I/ Luminaire with protective conductors.



Protection class II/protection by double or reinforced insulation.



Protection class III/low voltage protection.



IP
IP rating, determines whether the electrical equipment is suitable for various environmental conditions




IK
The IK shock resistance level is a measure of the resistance of electrical equipment enclosures to mechanical stress, particularly impact stress



Connection / application



Specified inrun strength (for recessed luminaires)
Overrun luminaire (for vehicles with pneumatic tyres)



Length of cable with plug or length of cable with open end.



Diameter of luminaire mounting on pole.


Light emission



Light (up, down)
Determination of the direction of the light beam emission.



Light (narrow down - wide up, narrow up, etc.)
Determination of the direction and angle of the light beam emission.



Swivel and tilt range
Adjustable light direction.



Light angle
Determination of the angle of the light beam emission.

Main and visual materials used



Steel



Stainless steel



Aluminium



Copper



Wood

Type of lens



Toughened / safe glass
Luminaire with safe glass diffuser.



PMMA (acrylic glass)
The luminaire uses PMMA (acrylic glass) diffuser.



PC (polycarbonate)
The luminaire uses PC (polycarbonate) diffuser.



Norlys AS
P.B 1014 Hoff, 0218 Oslo
Hovfaret 4B, 0275 Oslo
Norway

+47 24 12 40 10
www.norlys.com
firmapost@norlys.no