

NORLYS TRYSIL 1000


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Trysil 1000XX0009
14.10.2026 v.09.32
www.norlys.no



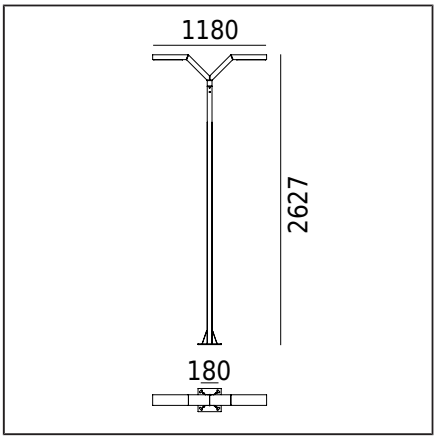

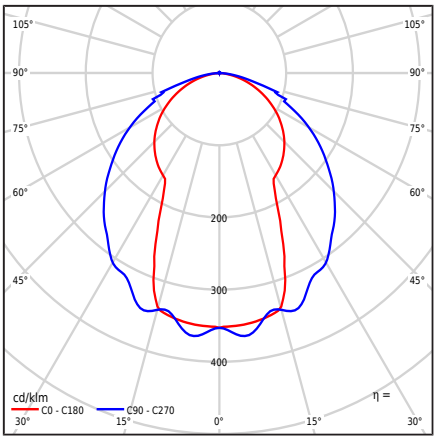

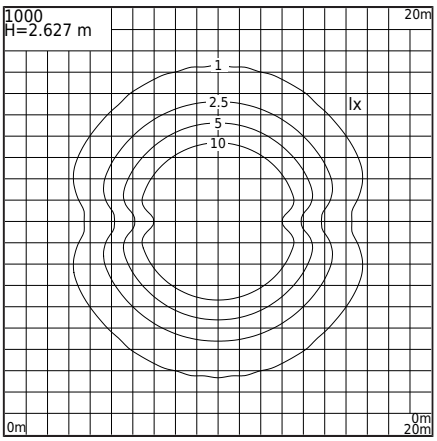

Type of luminaire

Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Luminaire with a contemporary design. For lighting gardens, private areas, and other architectural concepts

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	According to the attached assembly instructions Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility to connect the luminaire in loops max 3x2.5mm² Round insulated cable with a maximum diameter of ø12.5 mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	21,3kg / 23,7kg
Box dimensions [cm]	232cm x 44cm x 38cm
Luminaire dimensions [cm]	118cm x 24cm x 263cm

Technical data

4 LED modules.	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	21,2W
Luminaire wattage	25W
Lamp luminous flux	3976lm
Luminaire luminous flux	2433lm
Efficiency of the luminaire	97,3lm/W
ULOR	0.4%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	102 000h
L90 TM-21 [wg LM-80]	52 600h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL II
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	4A / 50µs
BUG rating	B1-U1-G1

Spare parts

ZS1000zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, following applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.

TRYSIL 1000

Indexes

Index	Color	RAL
1000AL	ALUMINUM	9006
1000BL	BLACK	9005
1000GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, following applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.