

NORLYS TRYSIL 1048


IP 65 | IK 10 | AC 220-240V 50-60Hz | LED | DIM

Trysil 1048XX0009
14.10.2026 v.09.32
www.norlys.no



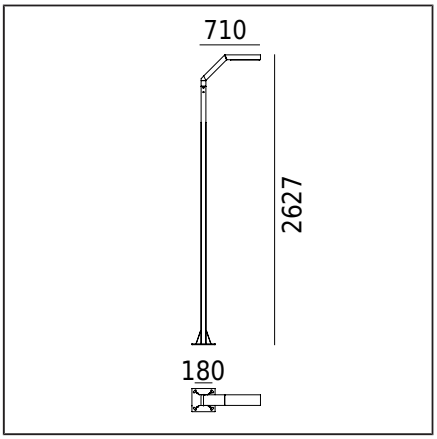

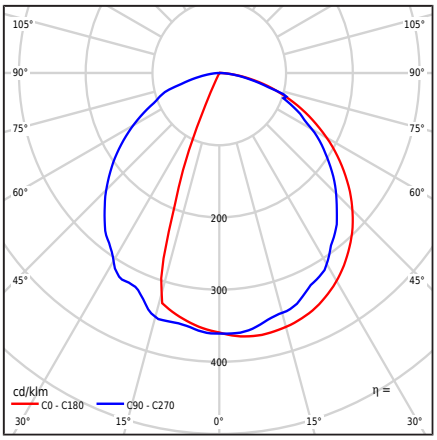

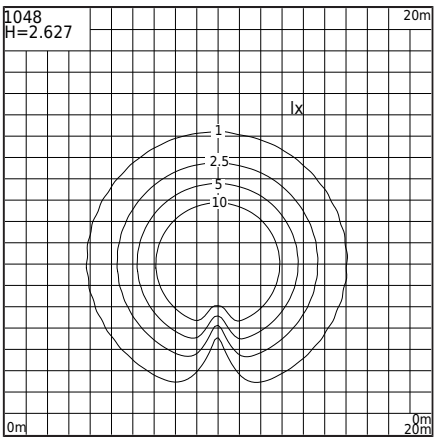

Type of luminaire

Type of luminaire	Pole luminaire
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	For lighting private areas and other architectural concepts

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Luminaire mounting: 4 holes ø12mm, spacing 200x200mm Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm², Possibility of connecting the luminaire in loops of max. 3x2.5mm² Round insulated cable with a maximum diameter of ø12.5 mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	17,2kg / 19,3kg
Box dimensions [cm]	44cm x 38cm x 232cm
Luminaire dimensions [cm]	71cm x 24cm x 263cm

Technical data

2 LED modules	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	10,6W
Luminaire wattage	12,5W
Lamp luminous flux	1988lm
Luminaire luminous flux	1260lm
Efficiency of the luminaire	100,8lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	102 000h
L90 TM-21 [wg LM-80]	52 600h
Power Factor luminaire	PF 0,95
THD factor	10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- In the safety class for KL II
- For LED color 2700K [1/1]
- For a different luminous flux value
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	2A / 50µs
BUG rating	B1-U1-G0

Spare parts

ZS1048zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

TRYSIL 1048



Trysil 1048XX0009
14.10.2026 v.09.32
www.norlys.no

Indexes

Index	Color	RAL
1048AL	ALUMINUM	9006
1048BL	BLACK	9005
1048GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire