


NORLYS STAVANGER 1240

Stavanger
1240XX0013
14.10.2026 v.13.20
www.norlys.no



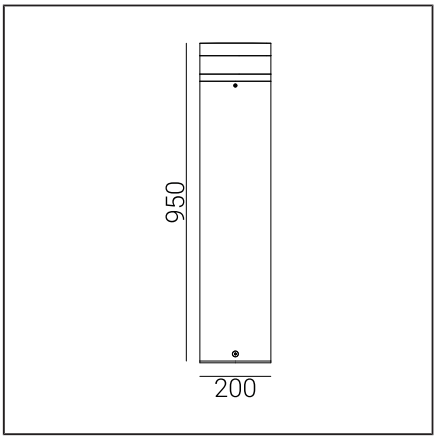

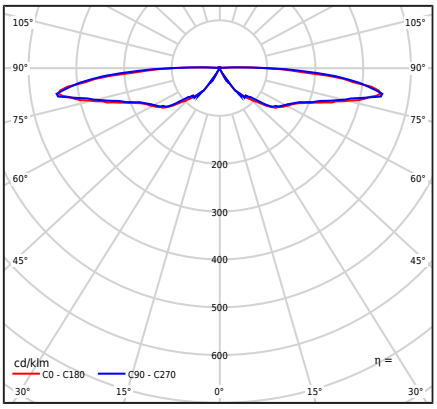

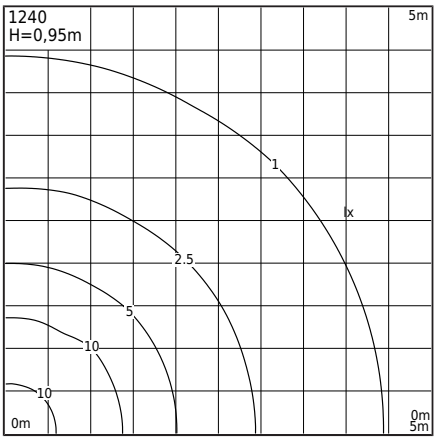

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Indirect light, rotationally symmetric, directed downwards.
Characteristics of the luminaire	Bollard luminaire of stable and durable construction For lighting private areas and public spaces

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the luminaire: 3 holes ø9mm with a diameter of ø145mm every 120° Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm² Possibility to connect the luminaire in loops max 3x2,5mm² Round insulated cable with a diameter of ø8...17mm The luminaire is equipped with holes for mounting the TH-35 mounting rail, 10cm long
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	11,03kg / 12,69kg
Box dimensions [cm]	22,5cm x 22,5cm x 103,5cm
Luminaire dimensions [cm]	20cm x 20cm x 95cm

Technical data

LED module	Cree DK1305003 V2 XPG3 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	9,6W
Luminaire wattage	12,2W
Lamp luminous flux	1179lm
Luminaire luminous flux	428lm
Efficiency of the luminaire	35,1lm/W
ULOR	3,06%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,98
THD factor	< 20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,36A/36µs
BUG rating	B0-U2-G1

Accessories sold separately

1231GA0009	Ground anchor
3087GA0009	Mounting adapter
1230ZX0009	Concreting anchor
1232GA0010	Adapter for concrete foundation

Spare parts

ZS1240zx0013	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

Indexes

Index	Color	RAL
1240AL	ALUMINUM	9006
1240GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire