

NORLYS STAVANGER 1244


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DIM

Stavanger
1244XX0013
14.10.2026 v.13.13
www.norlys.no



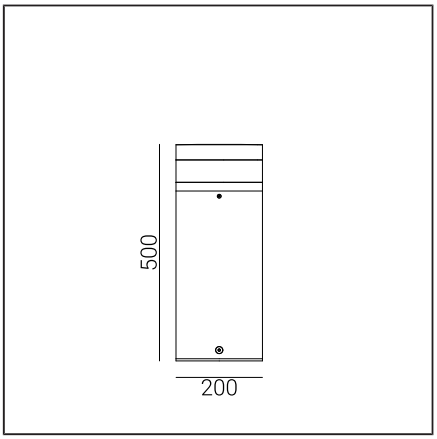

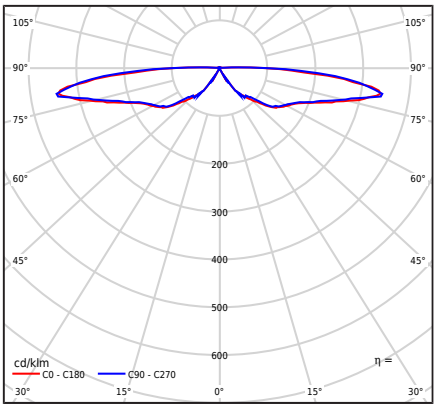

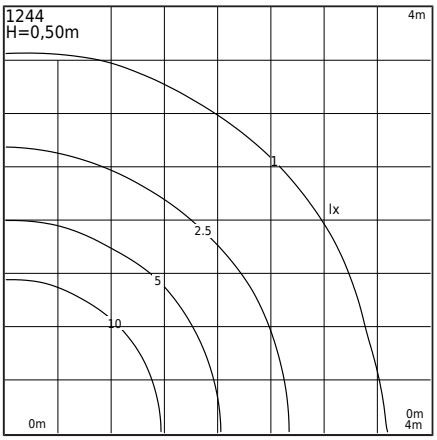

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Indirect light, rotationally symmetric, directed downwards.
Characteristics of the luminaire	Bollard luminaire of stable and durable construction. For lighting private areas and public spaces

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. Silicone gasket. Nylon6 cable gland.
Mounting method	Mounting of the luminaire: 3 holes ø9mm with a diameter of ø145mm every 120°, Other accessories must be purchased separately
Terminal	Connection terminals: max 3x4mm², Possibility to connect the luminaire in loops max 3x2,5mm². Round insulated cable with a diameter of ø8 ... 17mm. The luminaire is equipped with holes for mounting the TH-35 mounting rail, 10cm long
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	6,99kg / 8,04kg
Box dimensions [cm]	60,5cm x 24cm x 24cm
Luminaire dimensions [cm]	20cm x 20cm x 50cm

Technical data

LED module	Cree DK1305003 V2 XPG3 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	9,6W
Luminaire wattage	12,2W
Lamp luminous flux	1179lm
Luminaire luminous flux	428lm
Efficiency of the luminaire	35,1lm/W
ULOR	3,06%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,98
THD factor	< 20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
Inrush current	3,36A/36µs
BUG rating	B0-U2-G1

Accessories sold separately

1231GA0009	Ground anchor
3087GA0009	Mounting adapter
1230ZX0009	Concreting anchor
1232GA0010	Adapter for concrete foundation

Spare parts

ZS1244zx0013	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person following applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire

NORLYS STAVANGER 1244



Stavanger
1244XX0013
14.10.2026 v.13.13
www.norlys.no

Indexes

Index	Color	RAL
1244AL	ALUMINUM	9006
1244GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person following applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire