



NORLYS STAVANGER 1247

Stavanger
1247XX0013
12.10.2026 v.13.13
www.norlys.no

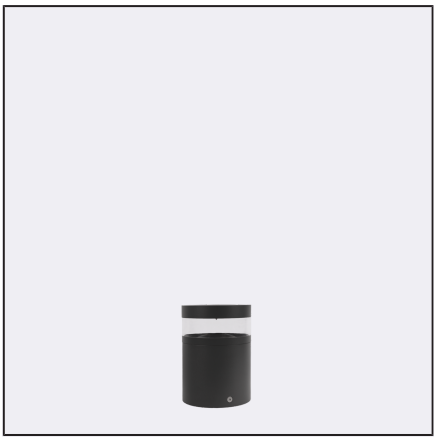

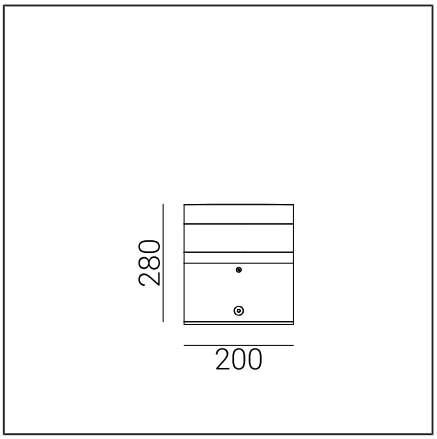

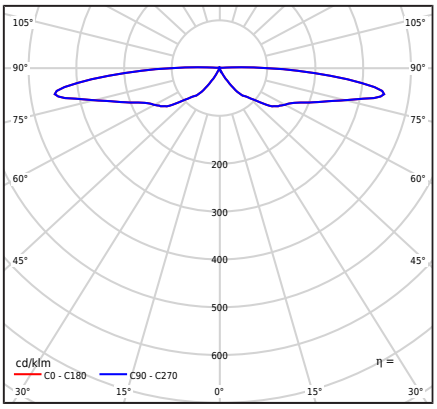

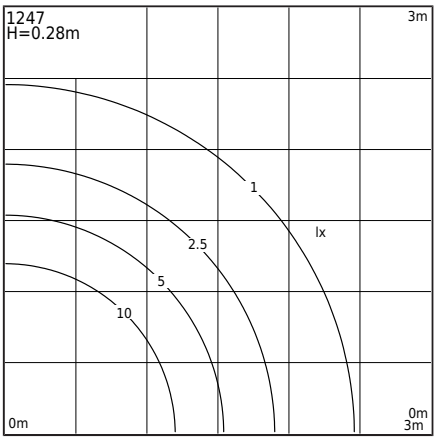

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Indirect light, rotationally symmetric, directed downwards.
Characteristics of the luminaire	Bollard luminaire of stable and durable construction. For lighting private areas and public spaces

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. Silicone gasket. Nylon6 cable gland.
Mounting method	Fixing of the luminaire: 3 holes ø9mm with a diameter of ø145mm every 120 ° Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2,5mm², possibility to connect luminaire in loop max 3x2,5mm². Round insulated cable with a diameter of ø8...17mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	6,99kg / 8,04kg
Box dimensions [cm]	22,5cm x 22,5cm x 37cm
Luminaire dimensions [cm]	20cm x 20cm x 28cm

Technical data

LED module	Cree DK1305003 V2 XPG3 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	6,6W
Luminaire wattage	8,4W
Lamp luminous flux	854lm
Luminaire luminous flux	312lm
Efficiency of the luminaire	37,1lm/W
ULOR	3,3%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>109 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B0-U2-G1

Accessories sold separately

1231GA0009	Ground anchor
3087GA0009	Mounting adapter
1230ZX0009	Concreting anchor
1232GA0010	Adapter for concrete foundation

Spare parts

ZS1247zx0013	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire

NORLYS STAVANGER 1247



Stavanger
1247XX0013
12.10.2026 v.13.13
www.norlys.no

Indexes

Index	Color	RAL
1247AL	ALUMINUM	9006
1247GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire