


NORLYS STOCKHOLM 1269


AC 220-240V 50-60Hz | IP 54 | IK 10 | E27 LED | DIM

Stockholm
1269XX0010
16.09.2026 v.10.16
www.norlys.no

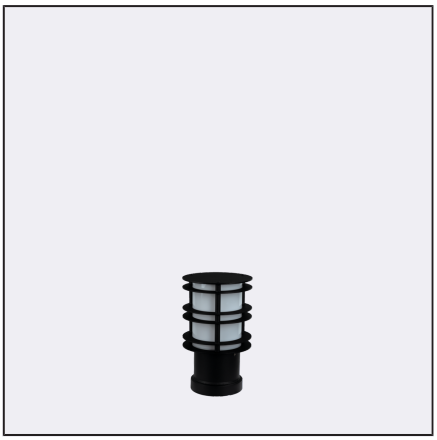

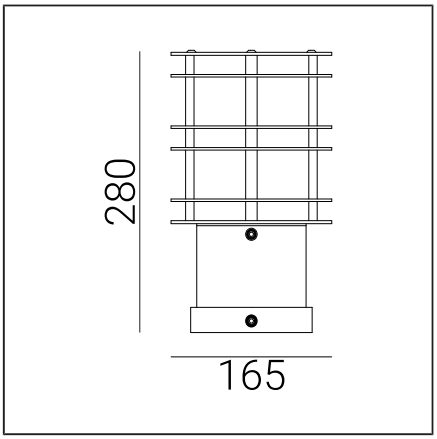

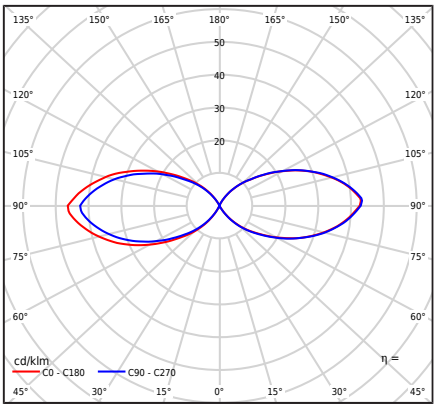

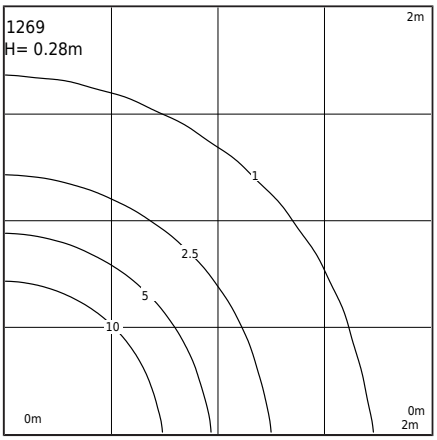

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Uncovered light, partly covered from the top.
Characteristics of the luminaire	Column fixture with stable and durable construction. For lighting private and public areas.

General information

Materials	Hot-dip galvanized steel. Lens - plastic PMMA in milky color. Silicone gasket.
Mounting method	Mounting fixture: 3 holes ø9mm on ø56mm diameter every 120°.
Terminal	Connection terminals: max 3x2.5mm², Cord in a round jacket with a maximum diameter of ø12mm.
Type of light source	LED Lamp E27 A55...A60 Replaceable light source by an end-user.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	4,9kg / 5,4kg
Box dimensions [cm]	31,5cm x 20cm x 20cm
Luminaire dimensions [cm]	16,5cm x 16,5cm x 28cm

Technical data

LED Lamp E27	Philips MAS LEDBulb DT5.9-60W E27 927 A60 FR G (Datasheet)
External control	Phase dimming LED GU10 E27 (User manual)
Light source wattage	5,9W
Luminaire wattage	5,9W
Lamp luminous flux	~ 806lm
Luminaire luminous flux	100lm
Efficiency of the luminaire	16,9lm/W
ULOR	49,72%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM6
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>25 000h
Power Factor luminaire	PF>0,7
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class D / EPREL	
BUG rating	B0-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

06281004	Lampshade - service kit
08288004	Gasket.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1269BL	BLACK	9005
1269GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning installation, it is necessary to familiarize oneself with the instructions attached to the fixture. Due to the rapid development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the degradation of the fixture's quality.