
NORLYS LOFOTEN 1940

AC 220-240V 50-60Hz | IP 44 | E27

Lofoten 1940XX0011
16.09.2026 v.11.10
www.norlys.no



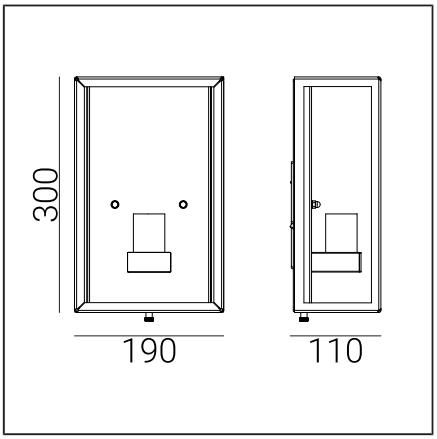

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	Classic design luminaire for general use. For lighting terraces, entrances, arbors and other architectural concepts.

General information

Materials	Powder painted steel. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixing the luminaire: 3 holes ø5mm, spacing 80x105mm.
Terminal	Connection terminals: max 2x2,5mm², possibility to connect luminaire in loop max 2x1,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	2,89kg / 3,25kg
Box dimensions [cm]	23cm x 15cm x 33cm
Luminaire dimensions [cm]	19cm x 11cm x 30cm

Technical data

Lamp E27	LED A 55...67
Light source wattage	LED max 11W
Luminaire wattage	LED max 11W
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).

Files to download

Manual

Indexes

Index	Color	RAL
1940BL	BLACK	9005

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.