

NORLYS OSLO 240A


IP 55 | IK 07 | E27 | AC 220-240V 50-60Hz

Oslo 240XX0111
16.09.2026 v.11.9
www.norlys.no



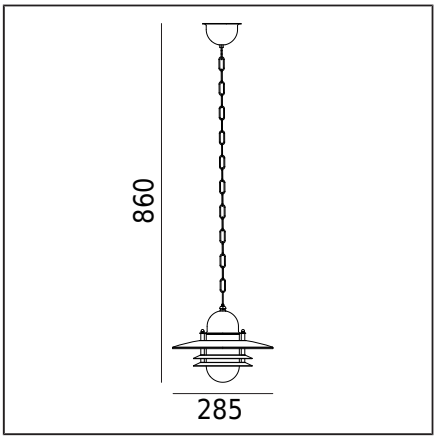

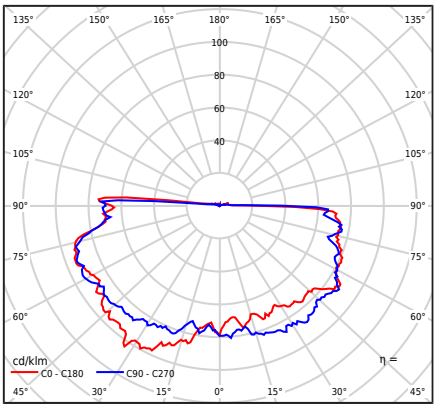

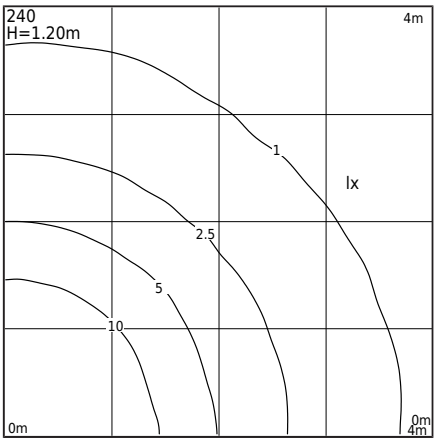

Type of luminaire

Type of luminaire	Pendant light.
Photometric body	Light discovered
Characteristics of the luminaire	Scandinavian design luminaire with chain suspension. For lighting gardens, terraces and other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - clear polycarbonate, UV stabilized.
Mounting method	Fixing the luminaire: ceiling hook.
Terminal	Connection terminals: max 2x2,5mm². A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	1,85kg / 2,4kg
Box dimensions [cm]	33cm x 30cm x 23,5cm
Luminaire dimensions [cm]	28,5cm x 28,5cm x 86cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	5,66%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Spare parts

06240003	Lampshade - service kit

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
240ABL	BLACK	9005
240ACO	COPPER	-
240AGA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing. Due to the dynamic development of lighting technology, additional information is available upon request. LED module must be replaced by a qualified person in accordance with
applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not
impair the quality of the luminaire.