# NORLYS EGERSUND PARK 6080

IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

Egersund Park
6080XX0009
06.11.2026 v.09.14
www.norlys.no



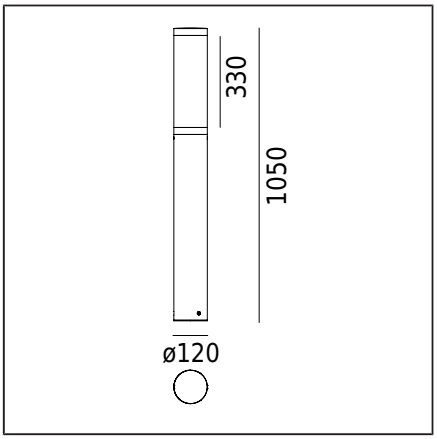


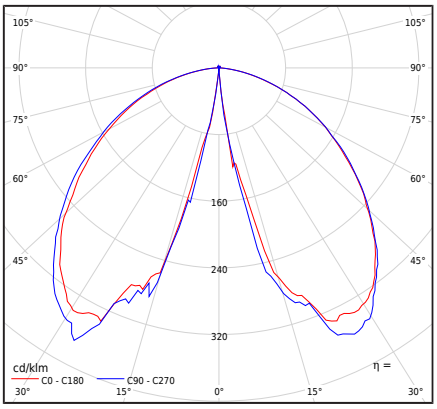


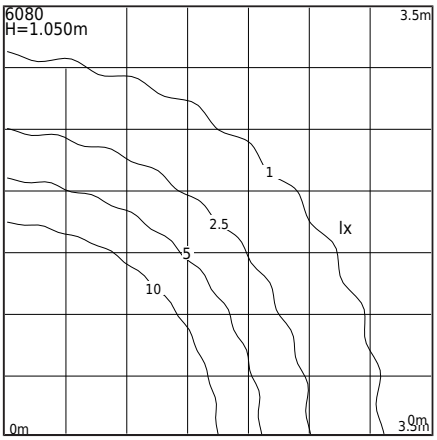


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Characteristics of the luminaire | Luminaire with a contemporary design. For garden illumination and other private and public areas |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket. |
| Mounting method | Luminaire mounting: 3 holes ø9mm on a diameter of ø65mm every 120°<br>According to the attached assembly instructions<br>Other accessories must be purchased separately |
| Terminal | Connection terminals: max 2x4mm²<br>Possibility of connecting the luminaire in loops of max. 2x4mm²<br>Round insulated cable with a diameter of: ø8...12mm or ø10...14mm<br>Other connection systems as accessories must be purchased separately |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE) |
| Luminaire weight net / gross | 5,64kg / 6,58kg |
| Box dimensions [cm] | 110cm x 15cm x 15cm |
| Luminaire dimensions [cm] | 105cm x 12cm x 12cm |

## Technical data

| | |
|---|---|
| LED module | Cree DK210704 V2 JB2835 3V 3K (Datasheet) |
| Driver | Yes |
| Light source wattage | 7,4W |
| Luminaire wattage | 9,1W |
| Lamp luminous flux | 1370lm |
| Luminaire luminous flux | 907lm |
| Efficiency of the luminaire | 99,7lm/W |
| ULOR | 1% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L80TM-21 [wg LM-80] | >102 000h |
| L90 TM-21 [wg LM-80] | >52 600h |
| Power Factor luminaire | PF 0,9 |
| THD factor | 10% |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- operation mode/dimming: DALI/TD ; DALI outdoor full programme
- In the safety class for KL I
- For LED color 2700K [1/1]
- For a different luminous flux value
- Version with surge protection device (SPD)
- For a different color of the luminaire (according to the RAL color palette)
- For a different luminaire height

Terms of sale and other information, after contact with the Norlys Sales Department

| | |
|---|---|
| Inrush current | 2A / 50µs |
| BUG rating | B1-U2-G1 |

## Accessories sold separately

| | |
|---|---|
| 205ZX0010 | Concreting anchor |
| 206GA0010 | Ground anchor |
| 206GA0S10 | Adapter for concrete foundation |

## Spare parts

| | |
|---|---|
| ZS6080zx0009 | Electrical service kit. |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

# EGERSUND PARK 6080



## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | BIM Revit |
| BIM ArchiCAD | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 6080AL | ALUMINUM | 9006 |
| 6080GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no